
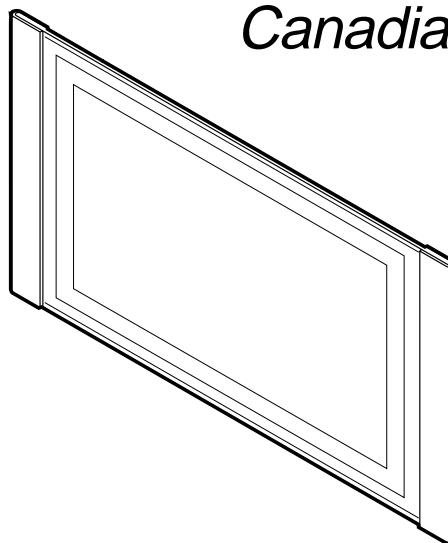


# KE-42XBR900

## SERVICE MANUAL

*US Model*  
*Canadian Model*

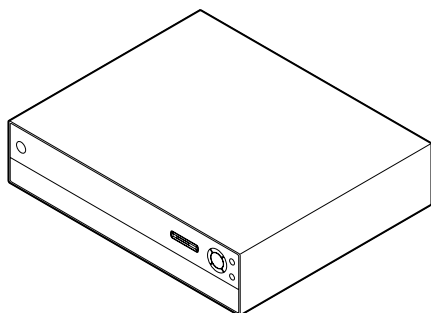

### SPECIFICATIONS

|                            |   |   |
|----------------------------|---|---|
| Panel System               | Plasma Display panel  |   |
| Display resolution         | Display resolution:<br>1024 pixels (horizontal) × 768 pixels (vertical)   |   |
| Antenna                    | 75 ohm external terminal for VHF/UHF  |   |
| Television System          | NTSC, American TV Standard  |   |
| Channel Coverage           | VHF   | 2-13  |
|                            | UHF   | 14-69   |
|                            | CATV  | 1-125   |
| Power Requirements         | 120V, 60 Hz   |   |
| Inputs/Outputs             |   |   |
| DVI-HDTV                   | 1 terminal, 3.3V T.M.D.S., 50 ohms<br>The DVI-HDTV input terminal is compliant with the EIA-861 standard and is not intended for use with personal computers. |   |
| Video (IN)                 | 3 total (1 on front panel)  | 1 Vp-p, 75 ohms unbalanced, sync negative   |
| S Video (IN)               | 3 total (1 on front panel)  | Y: 1 Vp-p, 75 ohms unbalanced, sync negative<br>C: 0.286 Vp-p (Burst signal), 75 ohms   |
| Audio (IN)                 | 6 total (1 on front panel)  | 500 mVrms (100% modulation)<br>Impedance: 47 kilohm   |
| Component Video Input      | 2 (Y, PB, PR)   | Y: 1.0 Vp-p, 75 ohms unbalanced, sync negative;<br>PB: 0.7 Vp-p, 75 ohms<br>PR: 0.7 Vp-p, 75 ohms                             |
| CONTROL S (OUT)            | 1   |   |
| Variable/Fixed Audio (OUT) | 1   | More than 408 m Vrms at the maximum volume setting (Variable)<br>More than 408 mVrms (Fixed)<br>Impedance (output): 2 kilohms |
| Monitor/Fixed Audio (OUT)  | ×1  |   |

FLAT PANEL COLOR TV  
**SONY®**

|                                   |   |  |
|-----------------------------------|---|--|
| Sub woofer (OUT)                  | 1   | phono jack   |
| RF Input                          | 2   |  |
| Converter                         | 1   |  |
| Supplied Accessories              | Remote Control                                    | RM-927Y  |
|                                   | AAA (LR03) Batteries                              | 2 supplied for remote control<br>AC power code (2)<br>Display interface cable (1)<br>Antenna cable (1)<br>Cleaning cloth |
|                                   |   |  |
|                                   |   |  |
| Screen Size (measured diagonally) | KE-42XBR900                                       | 42 inches  |
| Speaker Output                    | 15W ×2  |  |
| Dimensions (W × H × D)            | PDM-4200  | 1352 × 720 × 102 mm<br>(53 1/4 × 28 3/8 × 4 1/8 in)  |
|                                   | MBT-XBR900  | 430 × 105 × 360 mm<br>(17 × 4 1/4 × 14 1/4 in)   |
| Mass                              | Display unit<br>PDM-4200: 39kg (86 lbs )          |  |
|                                   | Media receiver unit<br>MBT-XBR900: 7.5kg (16 lbs) |  |
| Power Consumption                 | In Use  | Display unit<br>PDM-4200: 460 W  |
|                                   |   | Media receiver unit<br>MBT-XBR900: 36 W  |
|                                   | In Standby  | Under 1.5 W  |

Design and specifications are subject to change without notice.

## SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:


1. Check the area of your repair for unsoldered or poorly-soldered connections. Check the entire board surface for solder splashes and bridges.
2. Check the interboard wiring to ensure that no wires are “pinched” or contact high-wattage resistors.
3. Check that all control knobs, shields, covers, ground straps, and mounting hardware have been replaced. Be absolutely certain that you have replaced all the insulators.
4. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.
5. Look for parts which, though functioning, show obvious signs of deterioration. Point them out to the customer and recommend their replacement.
6. Check the line cords for cracks and abrasion. Recommend the replacement of any such line cord to the customer.
7. Check the connector shell, metal trim, “metallized” knobs, screws, and all other exposed metal parts for AC Leakage. Check leakage as described right.

### LEAKAGE TEST


The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes).

Leakage current can be measured by any one of three methods.


1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The “limit” indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOMs that are suitable. Nearly all battery operated digital multimeters that have a 2 V AC range are suitable. (See Fig. A)

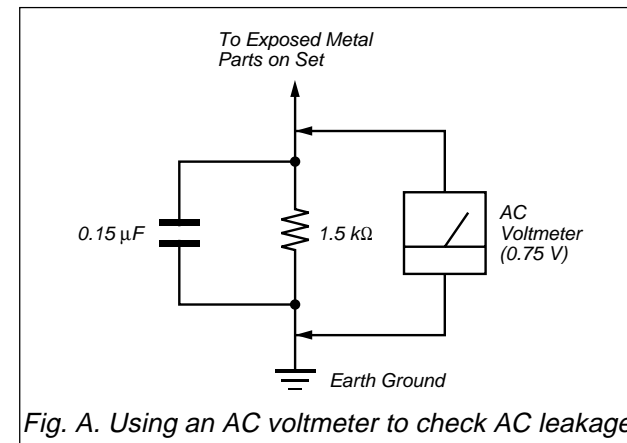

## **WARNING!!**

**SAFETY-RELATED COMPONENT WARNING!!**  
COMPONENTS IDENTIFIED BY SHADING AND MARK  ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL FOR SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY. CIRCUIT ADJUSTMENTS THAT ARE CRITICAL FOR SAFE OPERATION ARE IDENTIFIED IN THIS MANUAL. FOLLOW THESE PROCEDURES WHENEVER CRITICAL COMPONENTS ARE REPLACED OR IMPROPER OPERATION IS SUSPECTED.

## **AVERTISSEMENT!!**

**ATTENTION AUX COMPOSANTS RELATIFS À LA SÉCURITÉ!!**  
LES COMPOSANTS IDENTIFIÉS PAR UNE TRAME ET UNE MARQUE  SONT CRITIQUES POUR LA SÉCURITÉ. NE LES REMPLACER QUE PAR UNE PIÈCE PORTANT LE NUMÉRO SPECIFIÉ. LES RÉGLAGES DE CIRCUIT DONT L'IMPORTANCE EST CRITIQUE POUR LA SÉCURITÉ DU FONCTIONNEMENT SONT IDENTIFIÉS DANS LE PRÉSENT MANUEL. SUIVRE CES PROCÉDURES LORS DE CHAQUE REMPLACEMENT DE COMPOSANTS CRITIQUES, OU LORSQU'UN MAUVAIS FONCTIONNEMENT EST SUSPECTÉ.



# DIAGNOSIS (Reliability Self Diagnostic Display Specifications for MEDIA RECEIVER)

The abnormal conditions are indicated by the following LED flashes.

| Flash Count | Error Display Name | Error Description                | Operating Detection   | Port           | Repair part   |
|-------------|--------------------|----------------------------------|---|----------------|---|
| 4           | Fan Error          | Error detected for fan box       | Detects Low when fan function normally.<br>Detects High when Fan stops abnormally | IC6200 pin #2  | <ul style="list-style-type: none"> <li>• FAN</li> <li>• FAN CONNECTOR</li> <li>• SET 11V LINE</li> <li>• SET 5V LINE</li> </ul> |
| 8           | Digital OVP        | OVP for DD Converter on DP board | Detects High when normal.<br>Detects Low when abnormal.                           | IC5210 pin #49 | DP board<br><ul style="list-style-type: none"> <li>• Q1612, Q1613, Q1614</li> </ul>   |
| 9           | Panel Error        | Panel malfunction detected       | Detects during communication with panel.  |                | Panel Display Unit  |

1) \*Operation count is based on WDT.

\*For flashes, the Power/Standby LED flashes in red.

\*The flash period is based on the reliability standard.

\*A failure part can be expected by the number of times of blink of LED.


\*When two failures occur, the failure item generated previously is detected.

\*When failure occurs simultaneously, an item with little number of times of blink is detected.

\*In other than “Fan Error”, the unit is in standby state and blink LED at intervals of regulation.

In “Fan Error”, the unit is in a standby state after display for 1 minute about the message of “Fan problem – Powering down”

• Timing of LED blink (example of 4 times blink)

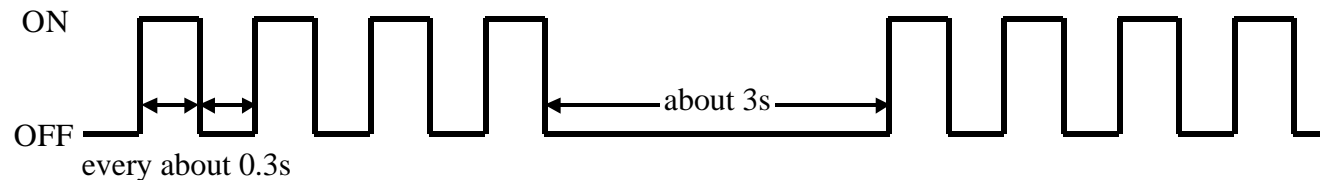

2) In the following case, POWER LED of Media Receiver Box blinks at a fixed interval in ORANGE

- When the cable which connects between Media Receiver Box and Panel Display has fallen out.
- When the AC code for Panel Display has fallen out.

In the following case, POWER LED of Panel Display blinks at a fixed interval in ORANGE

- When the cable which connects between Media Receiver Box and Panel Display has fallen out.
- When the AC code for Media Receiver Box has fallen out.

3) The example which judges whether it is failure

- POWER LED of Media Receiver Box: Blink 9 times in RED, and of Panel Display blink,  
and No picture or Power circuit does not work → Large possibility that Panel Display is out of order.
- When turn on Media Receiver Box, and NO LED of Box shine  
→ Large possibility that Media Receiver Box is out of order.
- When NO Blue LED of Box shine → Large possibility that Media Receiver Box is out of order.  
Check SET5V or IIC line on H1 board.
- When turn on Media Receiver Box, and Fan does not work  
→ Large possibility that Media Receiver Box is out of order

## TABLE OF CONTENTS

| <u>Section</u>                        | <u>Title</u> | <u>Page</u> | <u>Section</u>                            | <u>Title</u> | <u>Page</u> |
|---------------------------------------|--------------|-------------|---|--------------|-------------|
| <b>SAFETY CHECK-OUT</b>               | .....        | 3           | 1-2-10.A and AU Boards Removal            | .....        | 1-16        |
| <b>DIAGNOSIS</b>                      | .....        | 5           | 1-2-11.M Board Removal                    | .....        | 1-17        |
| <b>1. DISASSEMBLY</b>                 |              |             | 1-2-12.IF Boards Removal                  | .....        | 1-18        |
| 1-1. Display Unit (PDM-4200)          |              |             | 1-2-13.U1 Boards Removal                  | .....        | 1-19        |
| 1-1-1.Rear Cover Removal              | .....        | 1-1         | 1-2-14.U2 Boards Removal                  | .....        | 1-20        |
| 1-1-2.K and F Boards Removal          | .....        | 1-2         | <b>2. ADJUSTMENTS</b>                     |              |             |
| 1-1-3.P Board Removal                 | .....        | 1-3         | 2-1. VS, VD Voltage Adjustment (PDM-4200) | .....        | 2-1         |
| 1-1-4.G and F2 Boards Removal         | .....        | 1-4         | 2-2. White Balance Adjustment (PDM-4200)  | .....        | 2-2         |
| 1-1-5.R1 Board Removal                | .....        | 1-5         | <b>3. TROUBLESHOOTING</b>                 |              |             |
| 1-1-6.R2 Board Removal                | .....        | 1-6         | 3-1. Display Unit (PDM-4200)              | .....        | 3-1         |
| 1-2. Media Receiver Unit (MBT-XBR900) |              |             | 3-2. Media Receiver Unit (MBT-XBR900)     | .....        | 3-2         |
| 1-2-1.Panel and Covers Removal        | .....        | 1-7         | <b>4. DIAGRAMS</b>                        |              |             |
| 1-2-2.H1 Board Removal                | .....        | 1-8         | 4-1. Block Diagrams                       |              |             |
| 1-2-3.H4 Board Removal                | .....        | 1-9         | 4-1-1.Display Unit(PDM-4200)              | .....        | 4-1         |
| 1-2-4.H3 Board Removal                | .....        | 1-10        | 4-1-2.Media Receiver Unit (MBT-XBR900)    | .....        | 4-6         |
| 1-2-5.MS2 Board Removal               | .....        | 1-11        | 4-2. Frame Diagram                        | .....        | 4-15        |
| 1-2-6.H2 Board Removal                | .....        | 1-12        | 4-3. Circuit Boards Location              |              |             |
| 1-2-7.A Board Removal                 | .....        | 1-13        | 4-3-1.Display Unit(PDM-4200)              | .....        | 4-16        |
| 1-2-8.B Block Assy Removal            | .....        | 1-14        |   |              |             |
| 1-2-9.M, AD, and AU Boards Removal    | .....        | 1-15        |   |              |             |


| <u>Section</u>   | <u>Title</u>                                    | <u>Page</u> | <u>Section</u>   | <u>Title</u>                              | <u>Page</u> |
|--|---|-------------|--|---|-------------|
|  | 4-3-2.Media Receiver Unit (MBT-XBR900) .....    | 4-17        |  | (12)Schematic Diagram of U2 Board .....   | 4-61        |
| 4-4. Schematic Diagrams and Printed WiringBoards ..... |   | 4-18        |  | (13)Schematic Diagram of BM1C Board ..... | 4-62        |
|  | 4-4-1.Display Unit(PDM-4200) .....              | 4-19        |  | (14)Schematic Diagram of DICA Board ..... | 4-65        |
|  | (1)Schematic Diagrams of F Board .....          | 4-19        | 4-5. Semiconductors .....                                |   | 4-71        |
|  | (2)Schematic Diagram of F2 Board .....          | 4-20        |  |   |             |
|  | (3)Schematic Diagrams of G Board .....          | 4-21        | <b>5. EXPLODED VIEWS .....</b>                           |   | <b>5-1</b>  |
|  | (4)Schematic Diagram of K Board .....           | 4-25        | 5-1. Display Unit (PDM-4200) .....                       |   | 5-2         |
|  | (5)Schematic Diagrams of P Board .....          | 4-27        | 5-2. Media Receiver Unit-1 (MBT-XBR900) .....            |   | 5-4         |
|  | (6)Schematic Diagrams of R1 amd R2 Boards ..... | 4-32        | 5-3. Media Receiver Unit-2 (MBT-XBR900) .....            |   | 5-6         |
| 4-4-2.Media Receiver Unit (MBT-XBR900) .....           |   | 4-33        | 5-4. Packing Materials for Display Unit (PDM-4200) ..... |   | 5-7         |
|  | (1)Schematic Diagrams of A Board .....          | 4-33        | 5-5. Packing Materials for Media Receiver Unit           |   |             |
|  | (2)Schematic Diagram of AD Board .....          | 4-36        | (MBT-XBR900) .....                                       |   | 5-8         |
|  | (3)Schematic Diagrams of AU Board .....         | 4-41        |  |   |             |
|  | (4)Schematic Diagram of DP Board .....          | 4-43        | <b>6. ELECTRICAL PARTS LIST .....</b>                    |   | <b>6-1</b>  |
|  | (5)Schematic Diagrams of H1 and H5 Boards ..... | 4-45        |  |   |             |
|  | (6)Schematic Diagrams of H2 Board .....         | 4-47        |  |   |             |
|  | (7)Schematic Diagram of H3 and H4 Board .....   | 4-48        |  |   |             |
|  | (8)Schematic Diagrams of IFA Board .....        | 4-49        |  |   |             |
|  | (9)Schematic Diagrams of M Board .....          | 4-51        |  |   |             |
|  | (10)Schematic Diagrams of MS2 Boards .....      | 4-57        |  |   |             |
|  | (11)Schematic Diagrams of U1 Board .....        | 4-59        |  |   |             |




## SECTION 1 DISASSEMBLY

### 1-1. PANEL UNIT (PDM-4200)


#### 1-1-1. REAR COVER REMOVAL

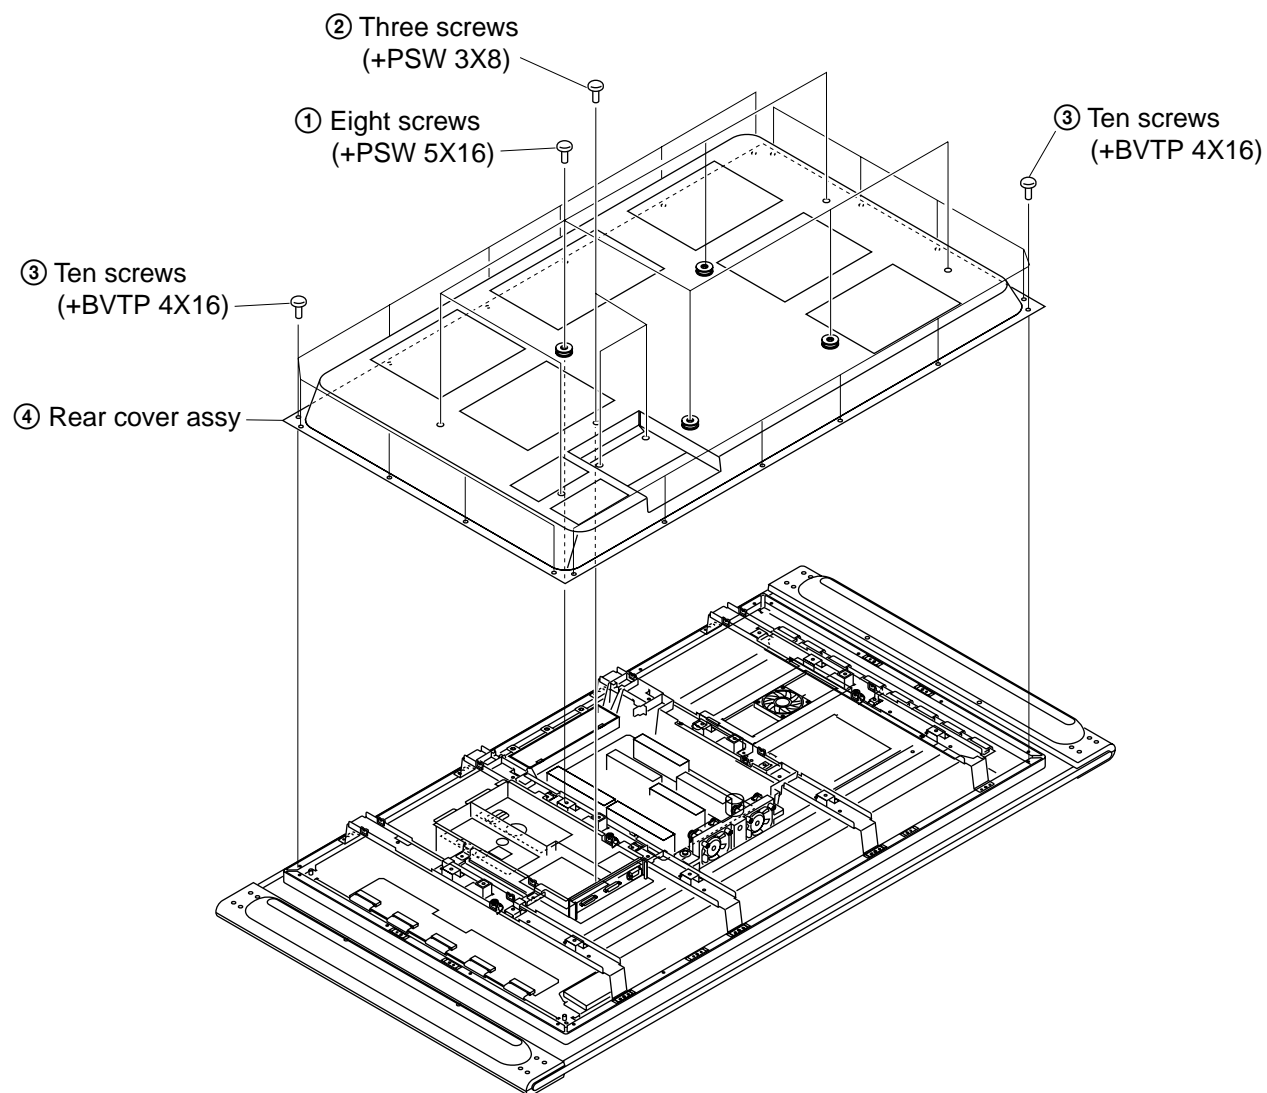


## 1-1-2. K AND F BOARDS REMOVAL

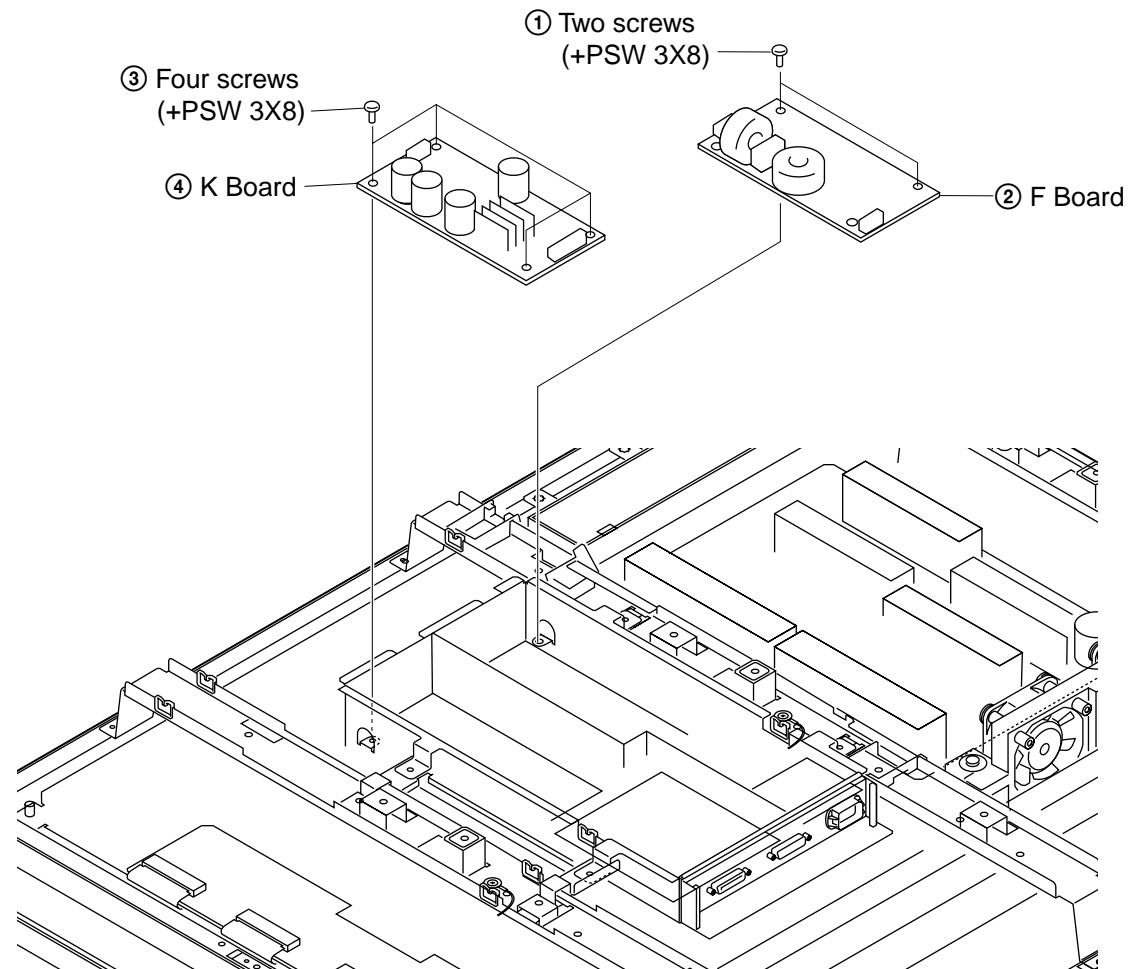

### 1-1-3. P BOARD REMOVAL

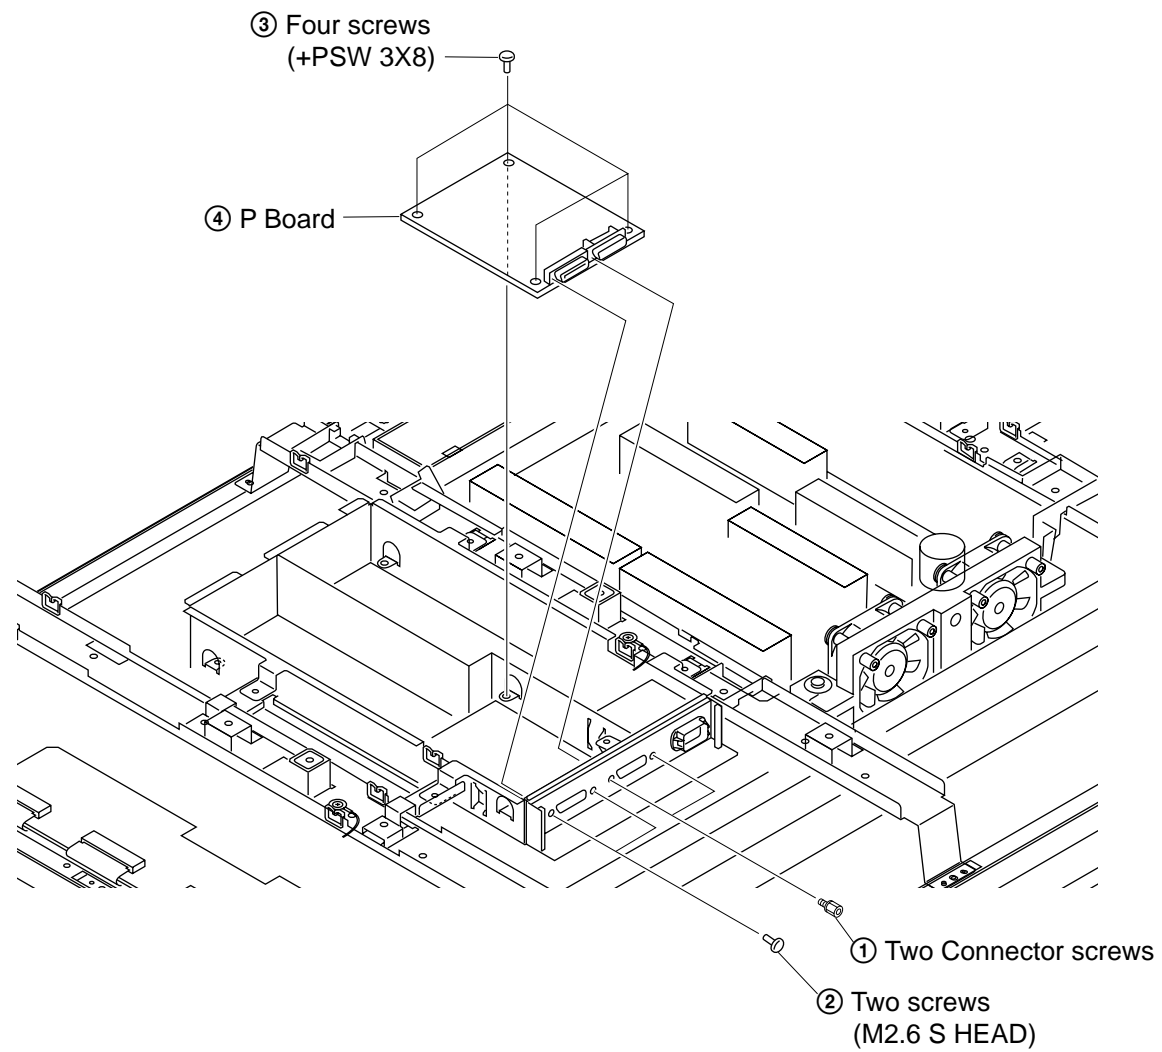


#### 1-1-4. G AND F2 BOARDS REMOVAL

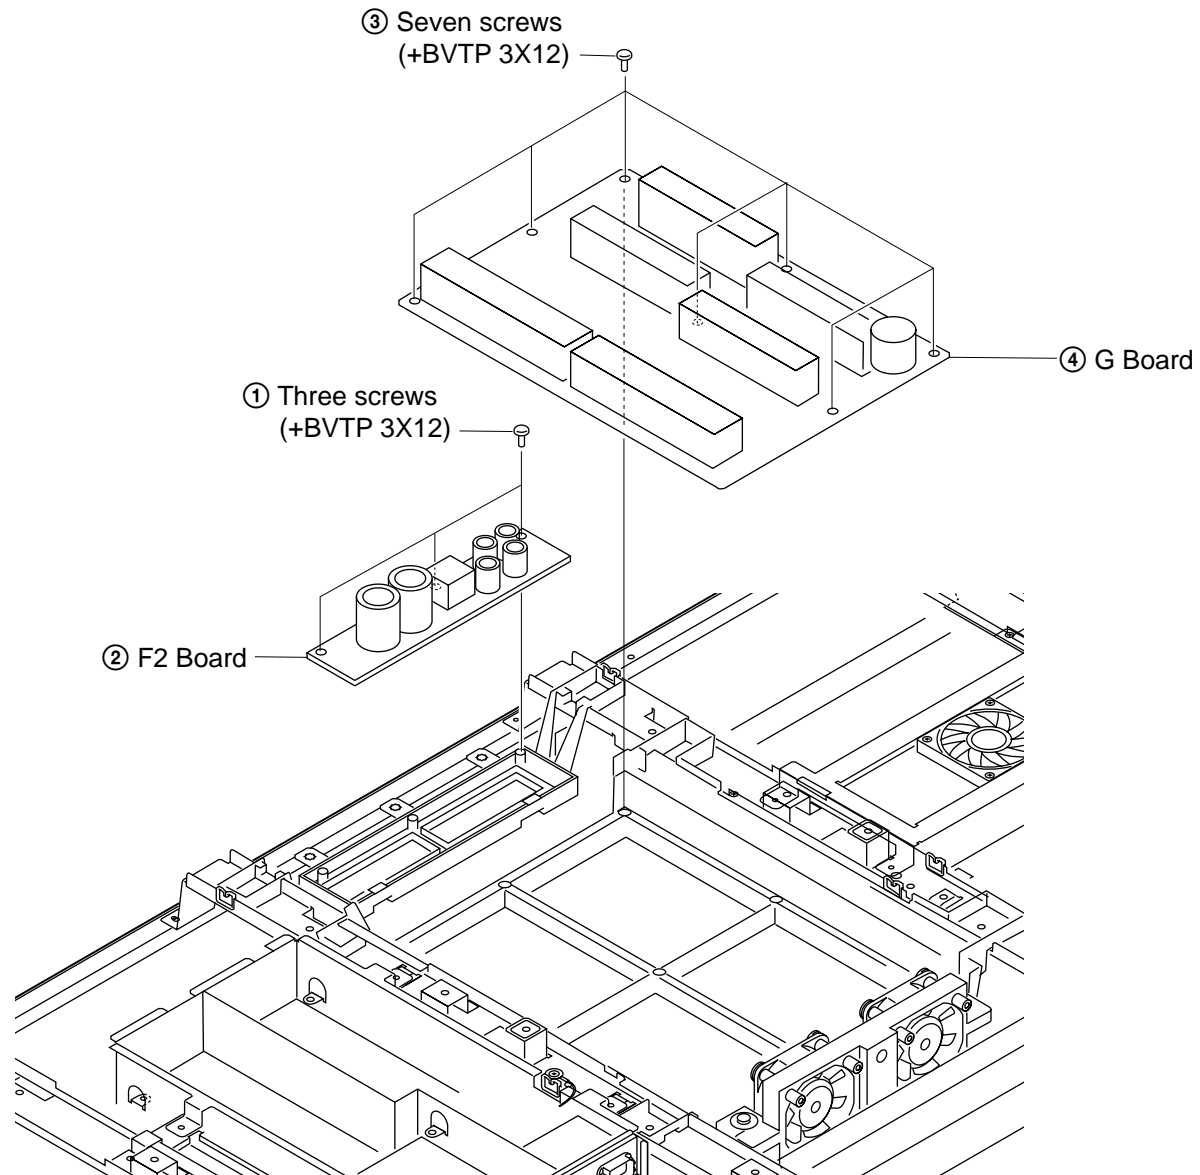




## 1-1-5. R1 BOARD REMOVAL

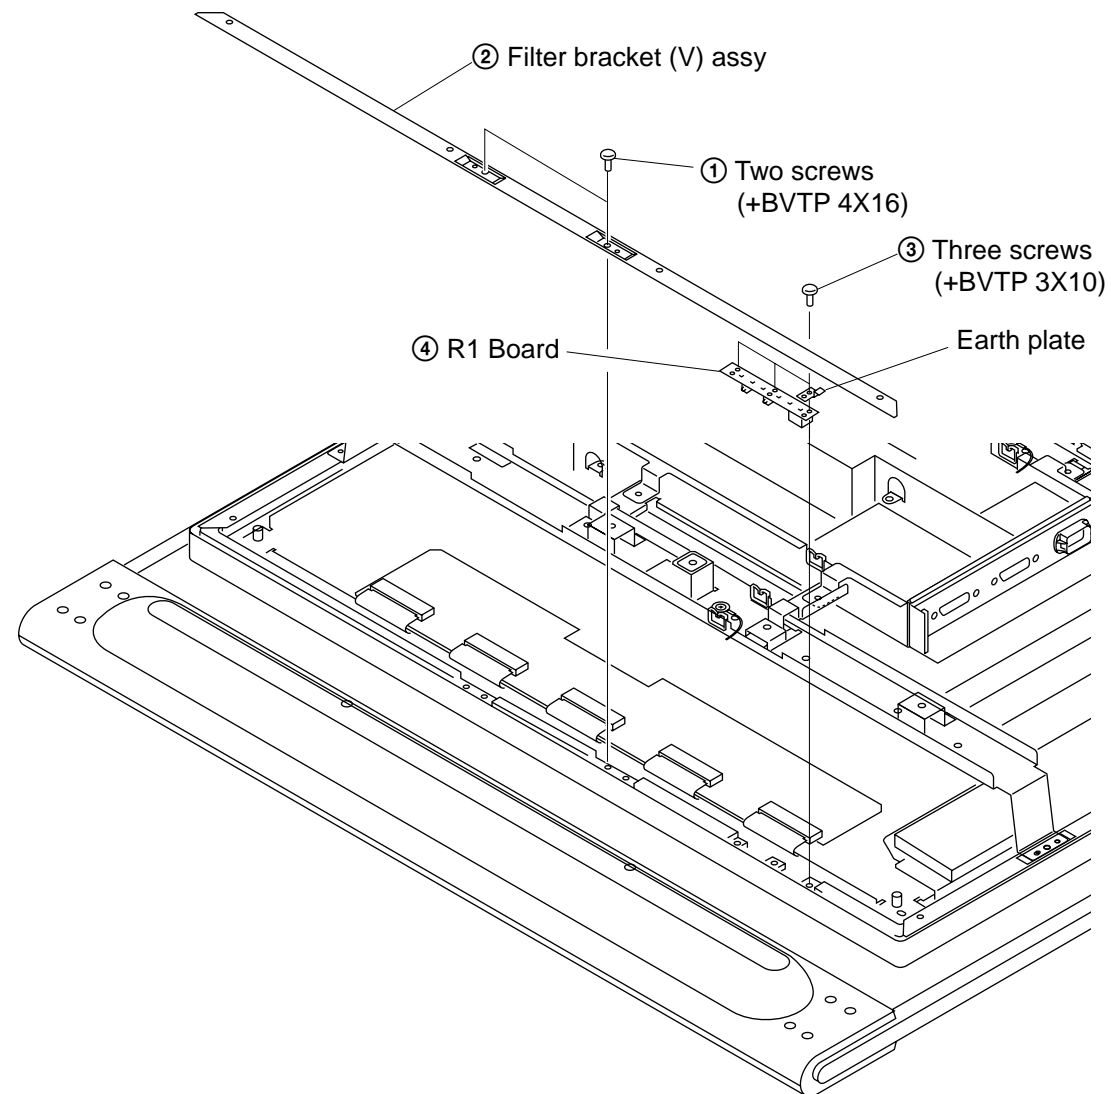


## 1-1-6. R2 BOARD REMOVAL

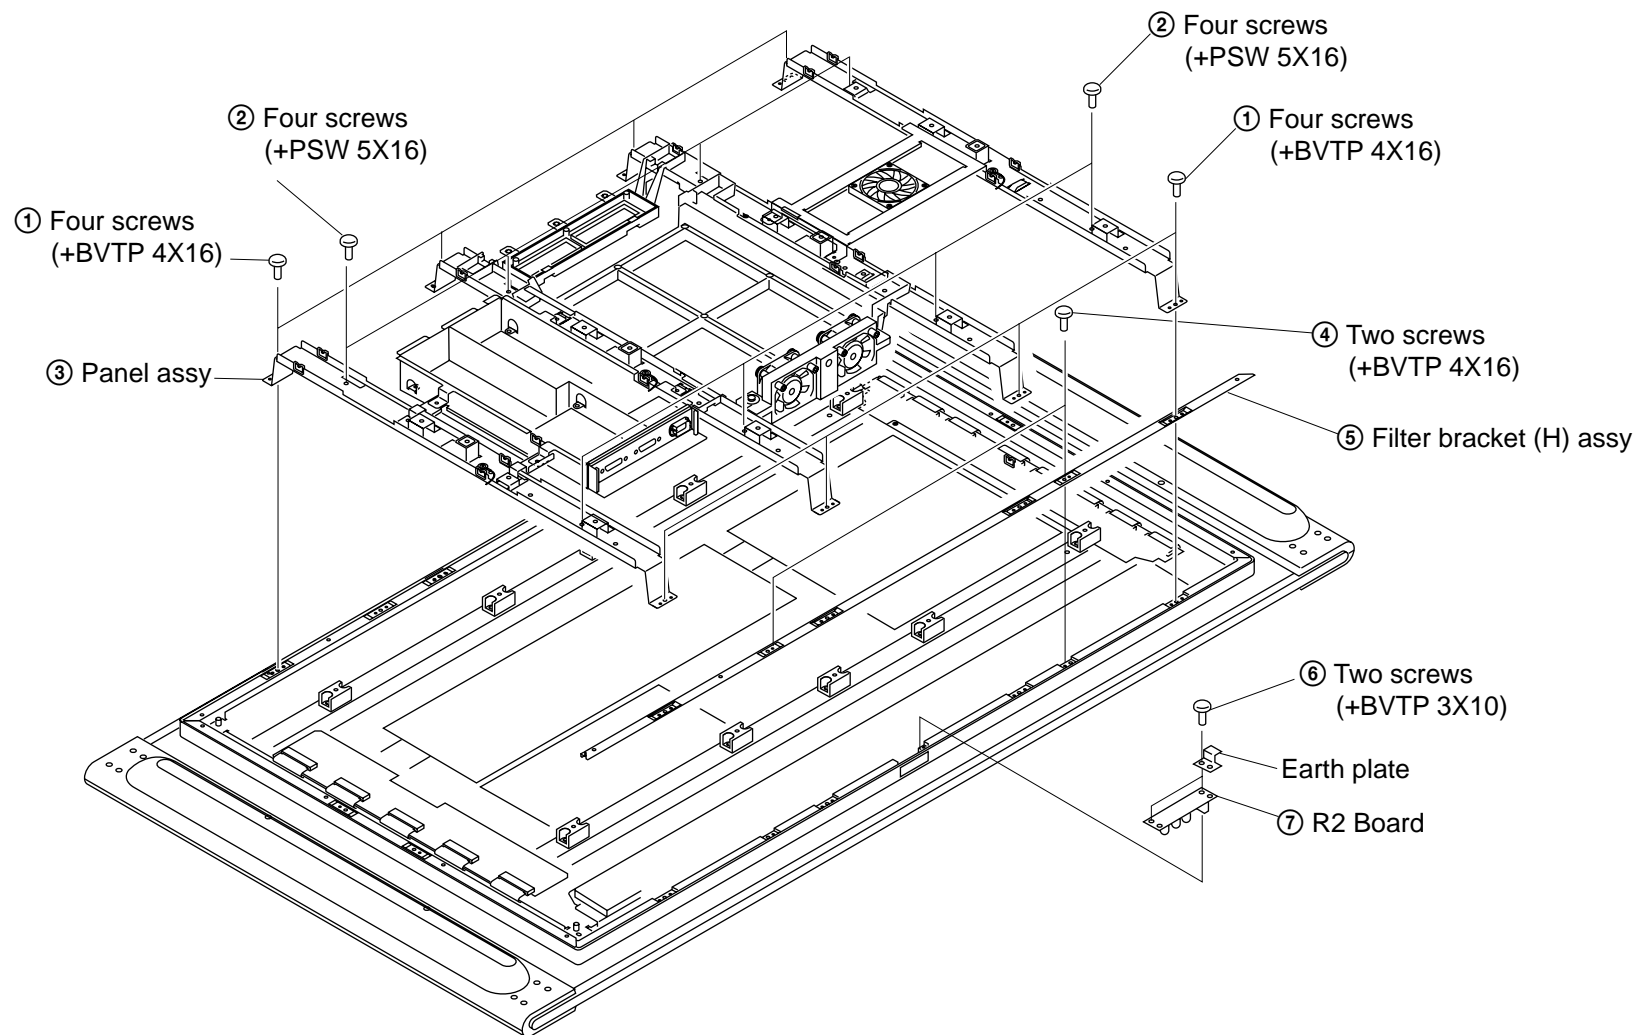


## 1-2. MEDIA RECEIVER UNIT (MBT-XBR900)


### 1-2-1. PANEL AND COVERS REMOVAL

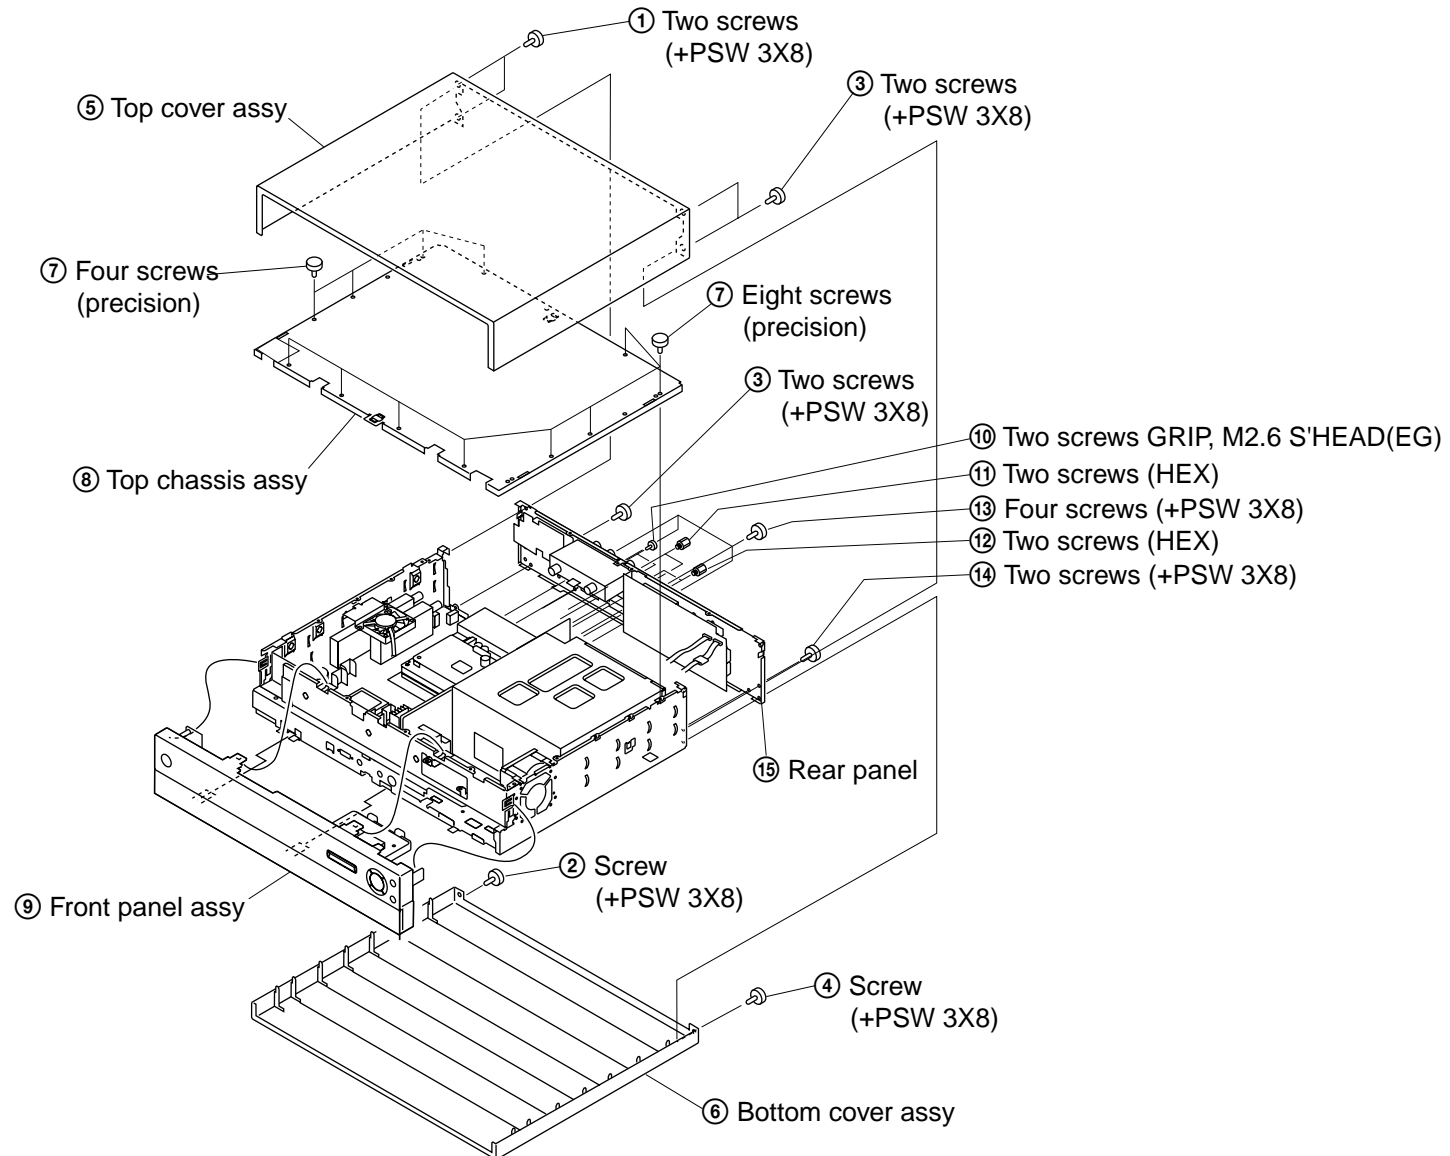


## 1-2-2. H1 BOARD REMOVAL

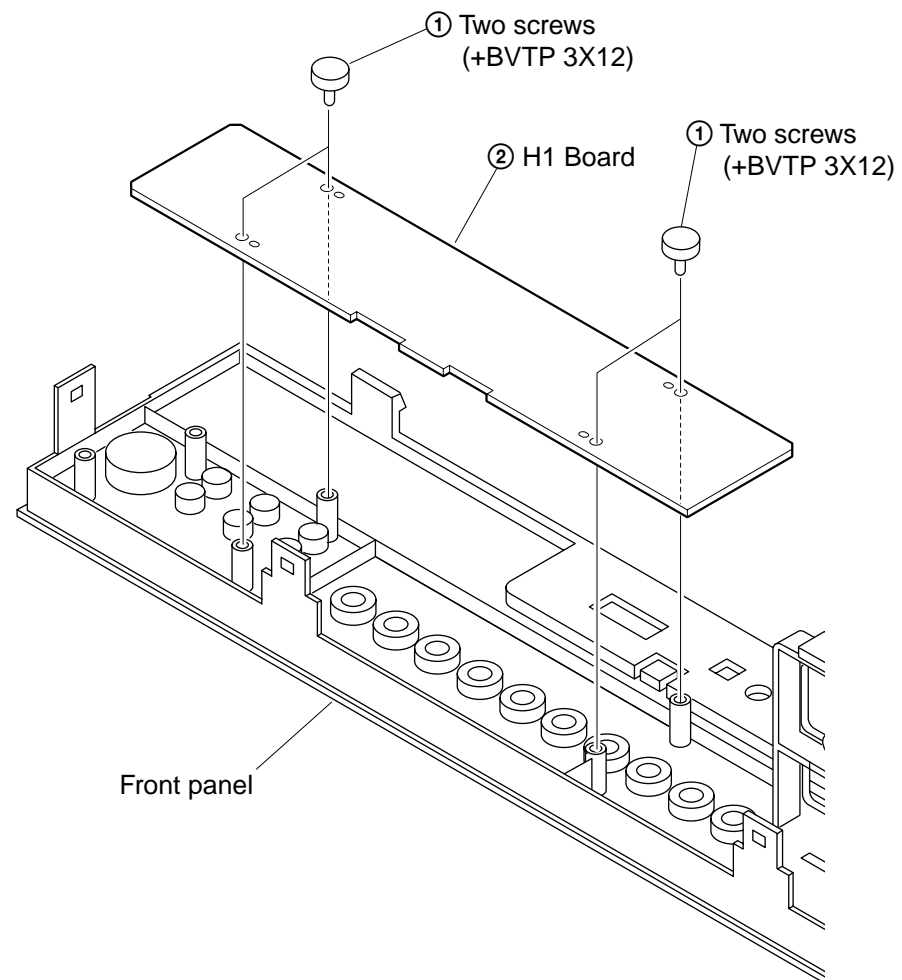


### 1-2-3. H4 BOARD REMOVAL

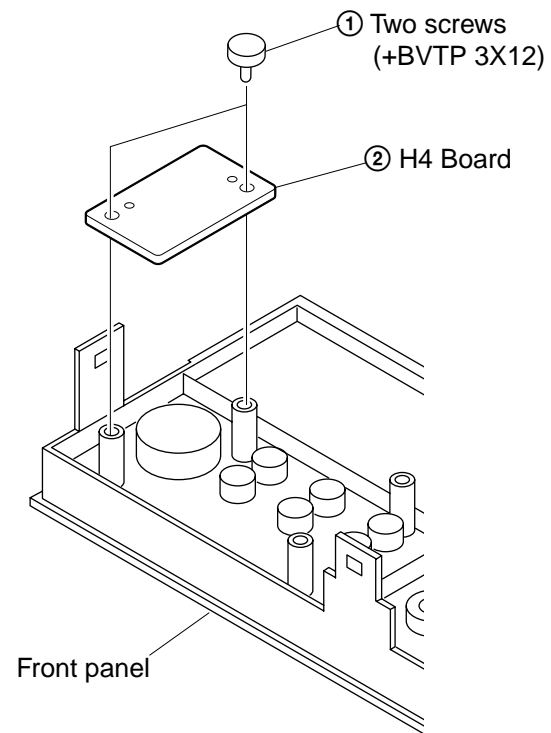


#### 1-2-4. H3 BOARD REMOVAL

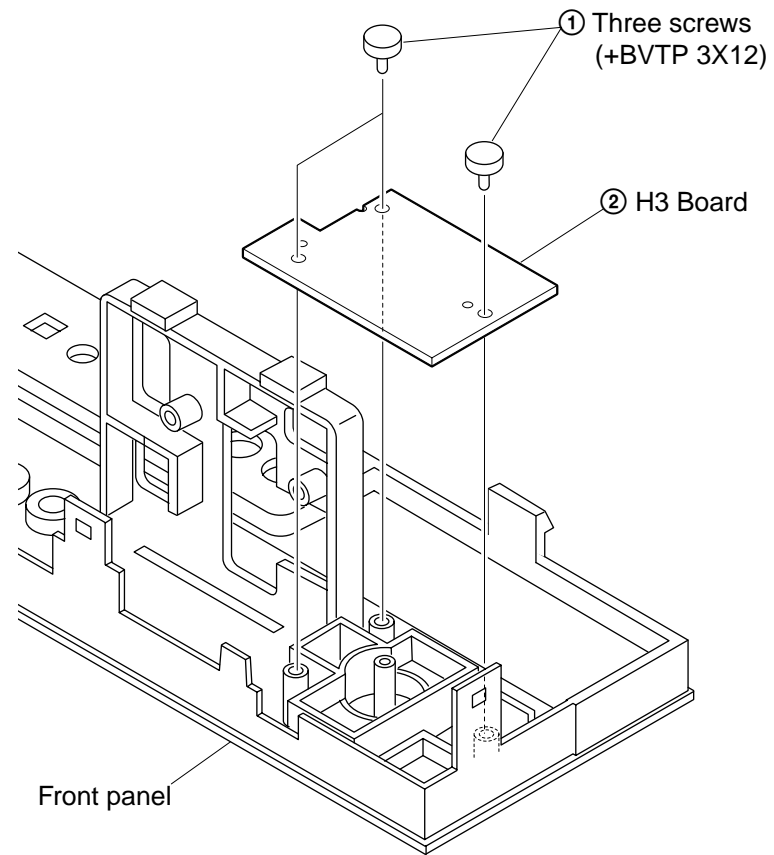

### 1-2-5. MS2 BOARD REMOVAL

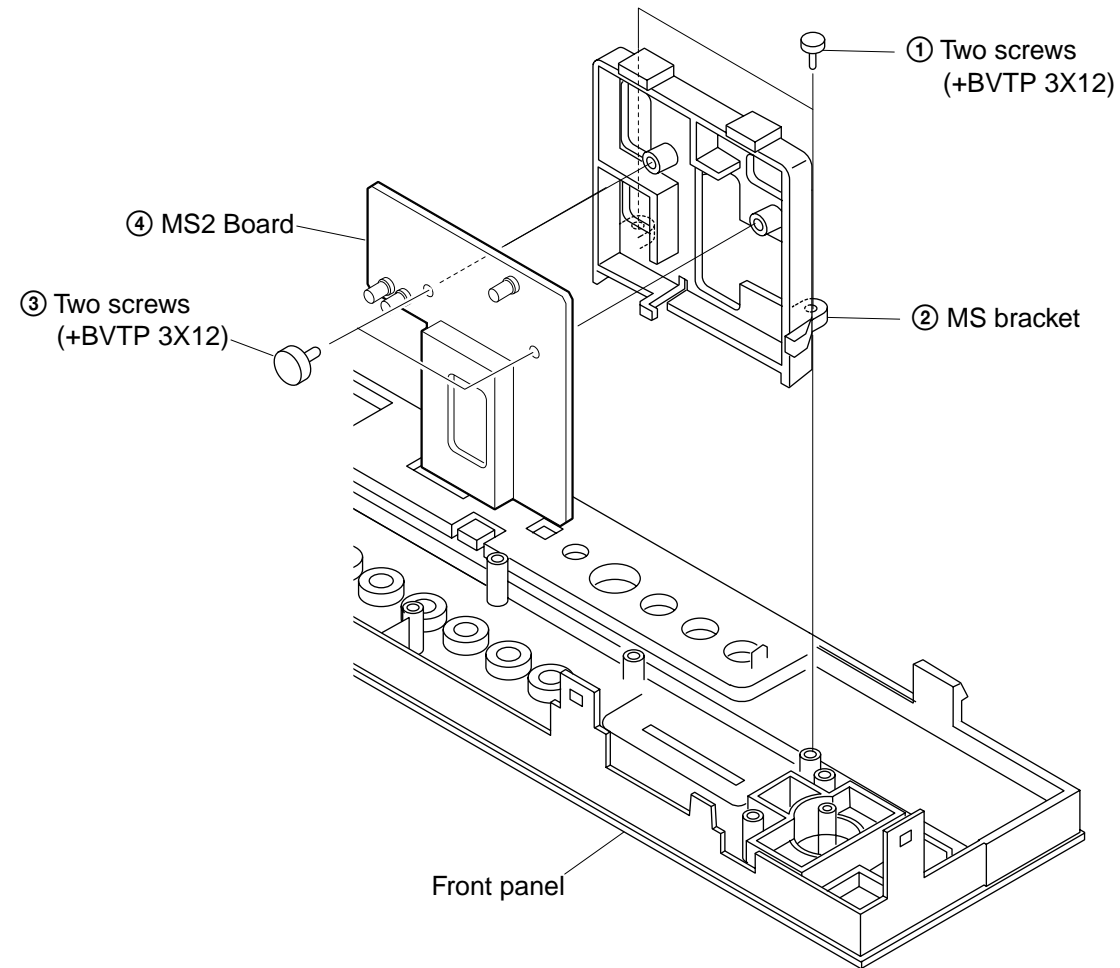


## 1-2-6. H2 BOARD REMOVAL

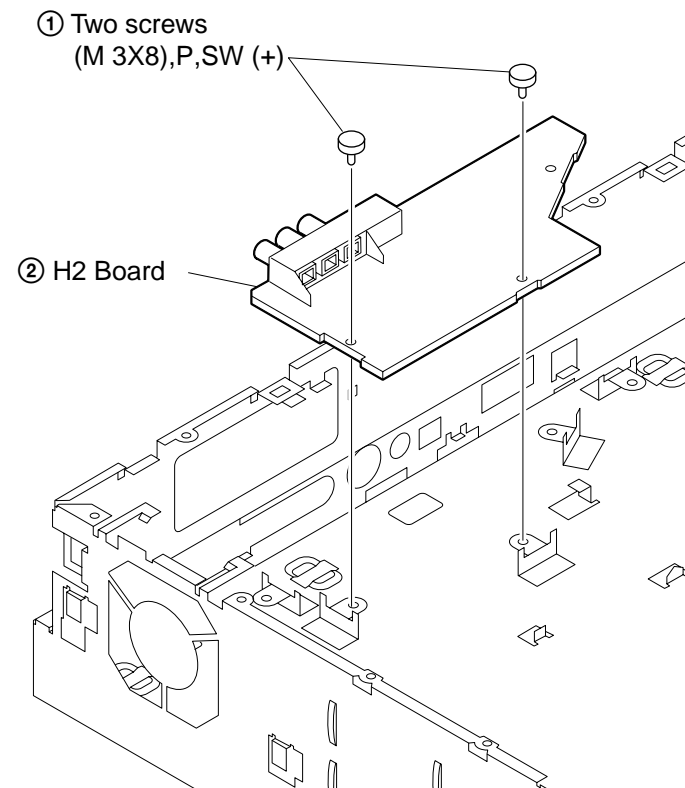





## 1-2-7. A BOARD REMOVAL

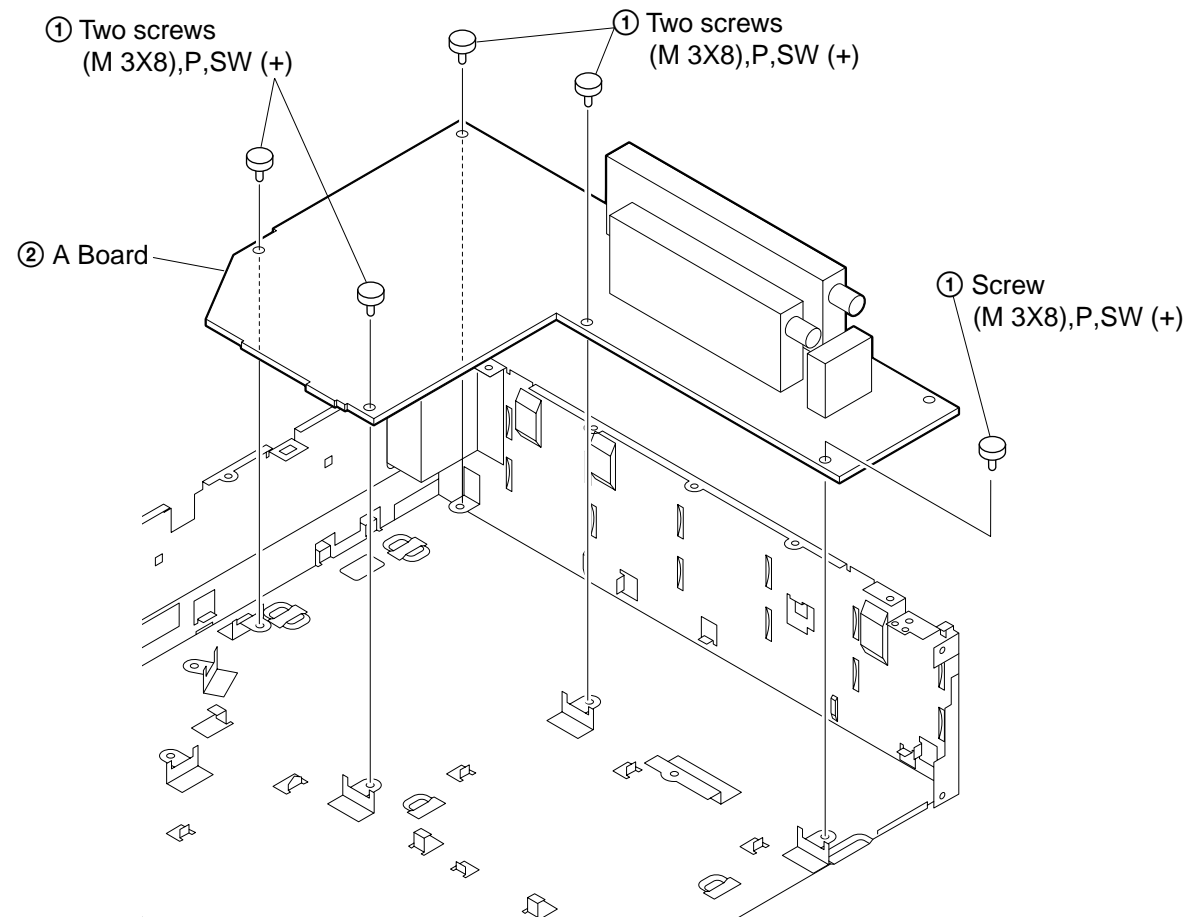


### 1-2-8. B BLOCK ASSY REMOVAL

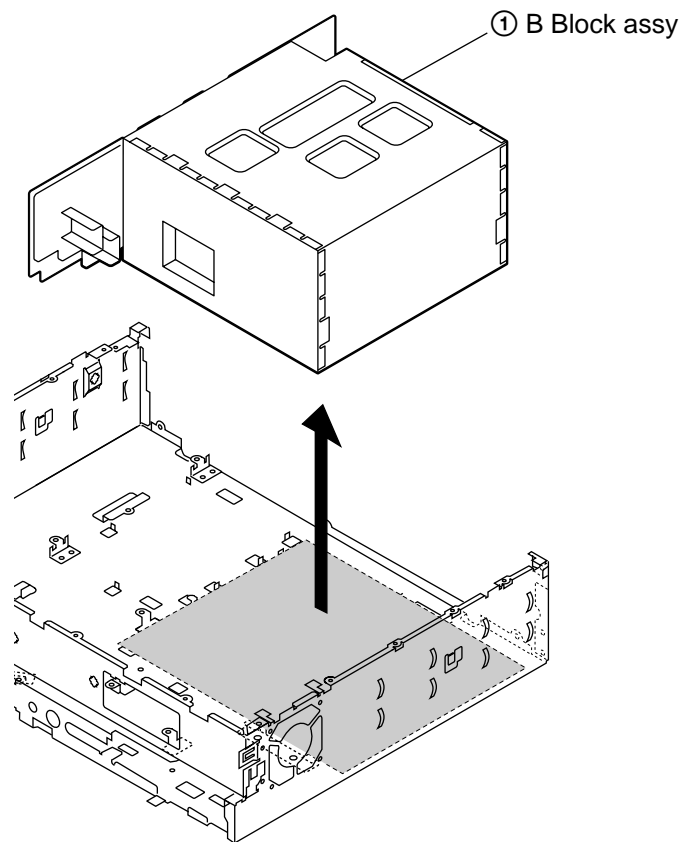


## 1-2-9. M, AD, AND AU BOARDS REMOVAL

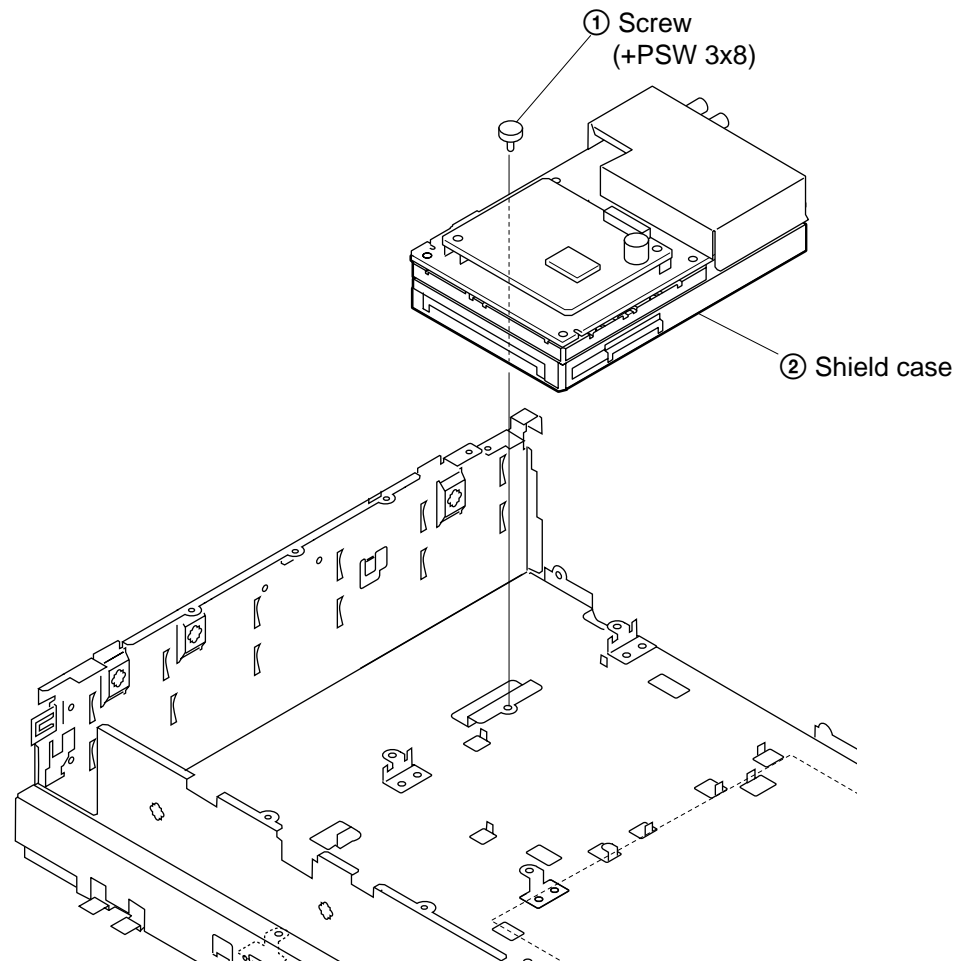


## 1-2-10. AD AND AU BOARDS REMOVAL

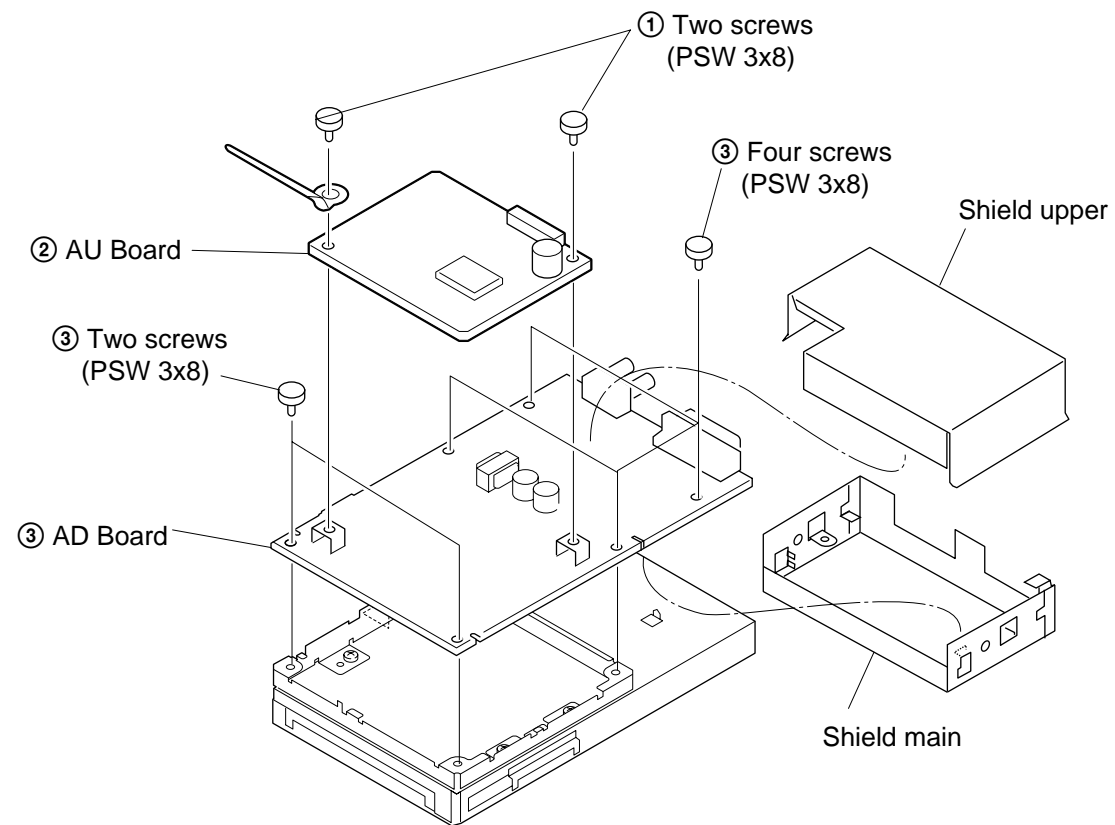


## 1-2-11. M BOARD REMOVAL

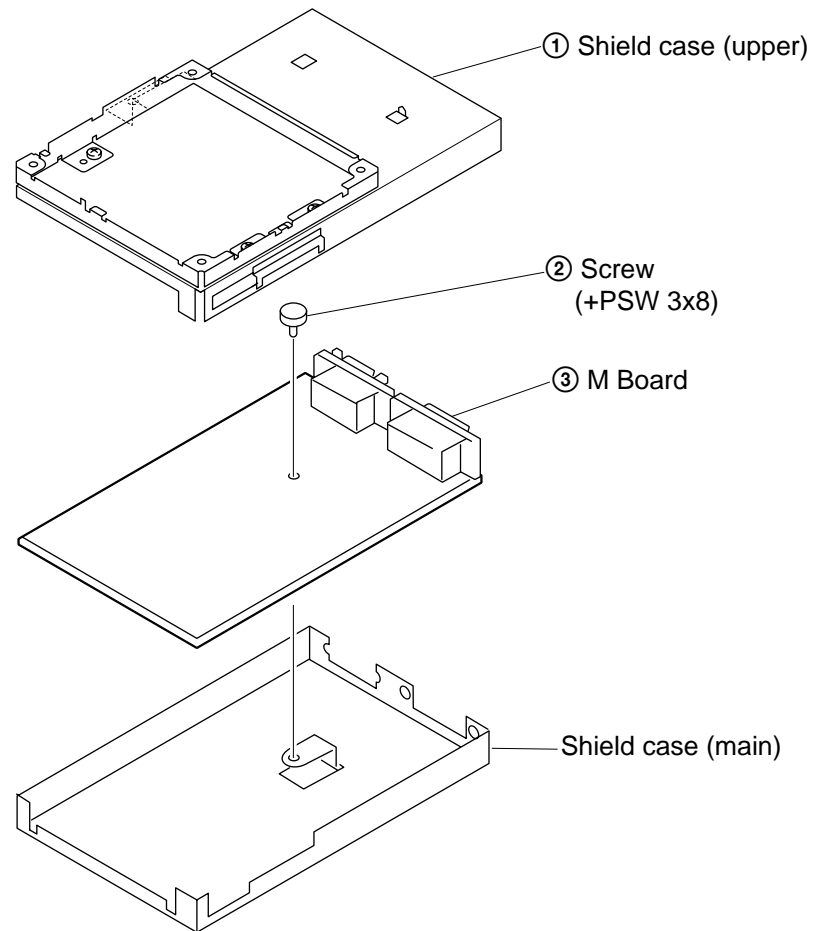


## 1-2-12. IF BOARD REMOVAL

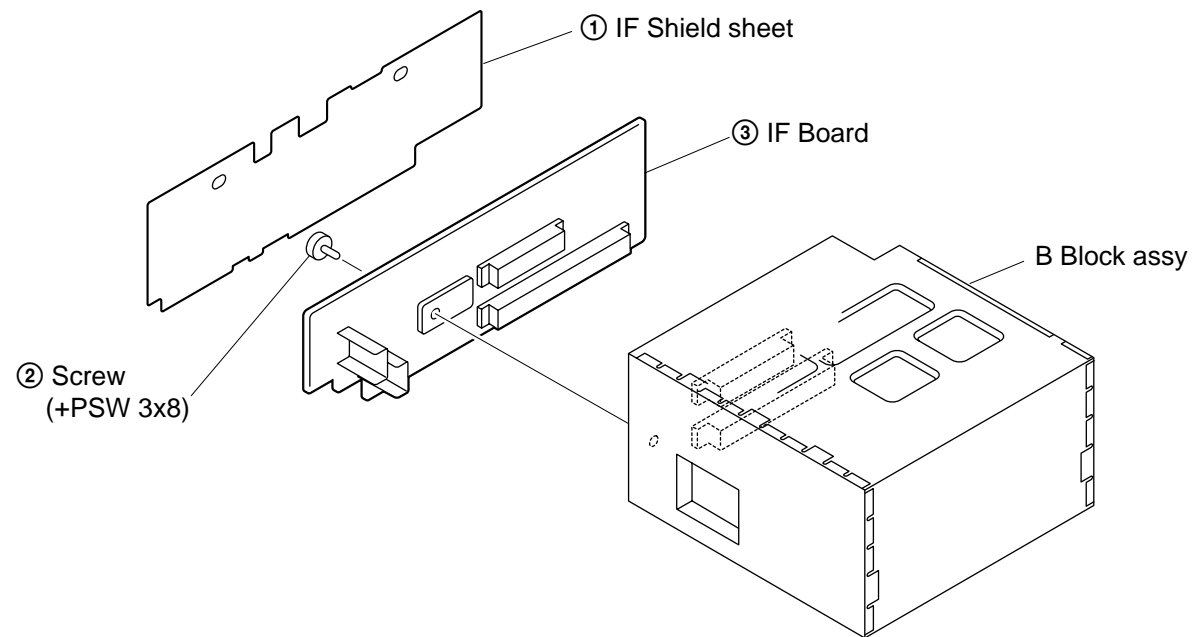

## 1-2-13. U1 BOARD REMOVAL

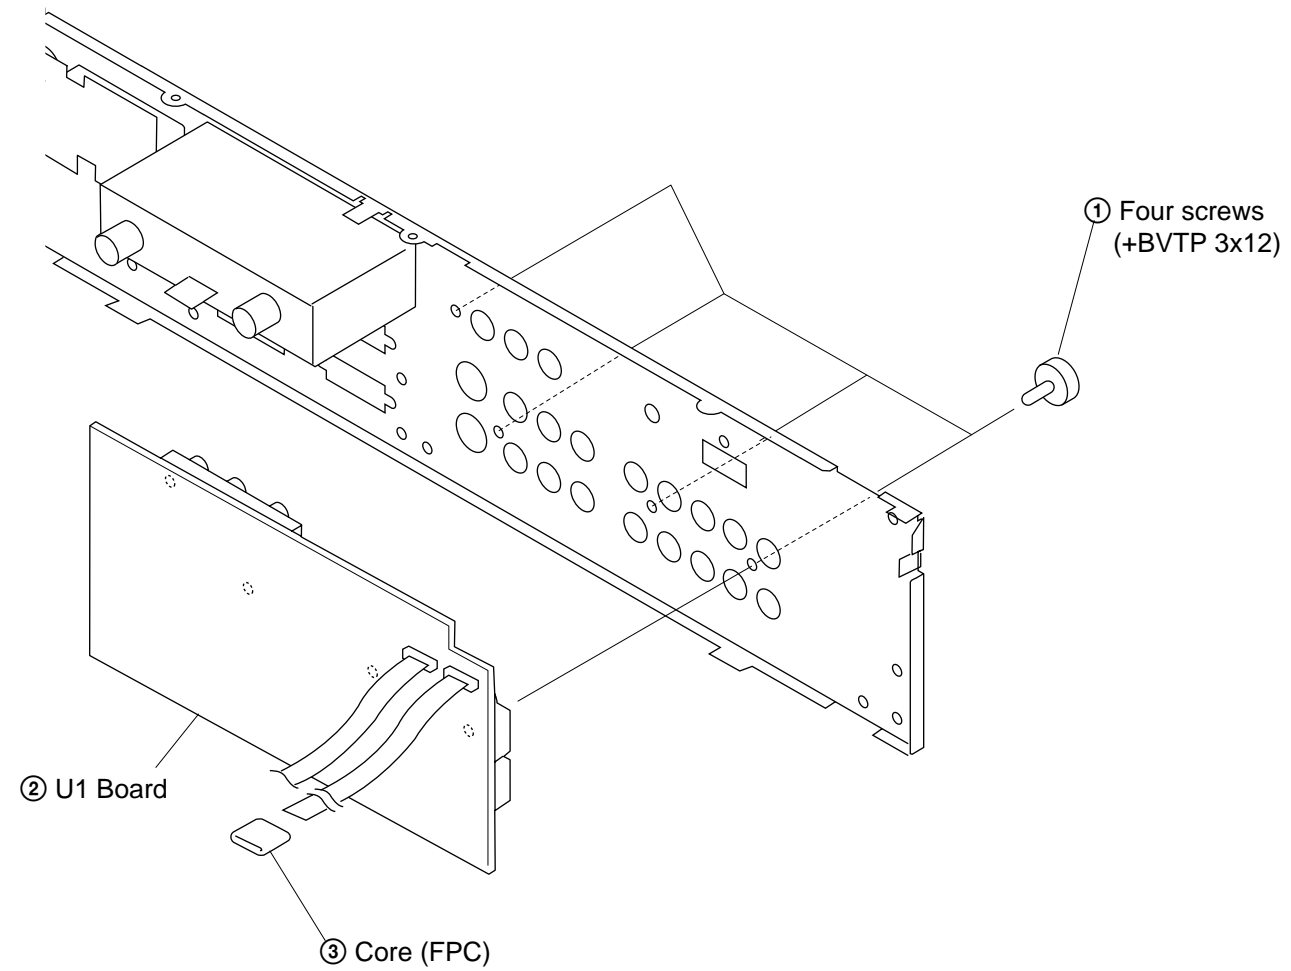

## 1-2-14. U2 BOARD REMOVAL

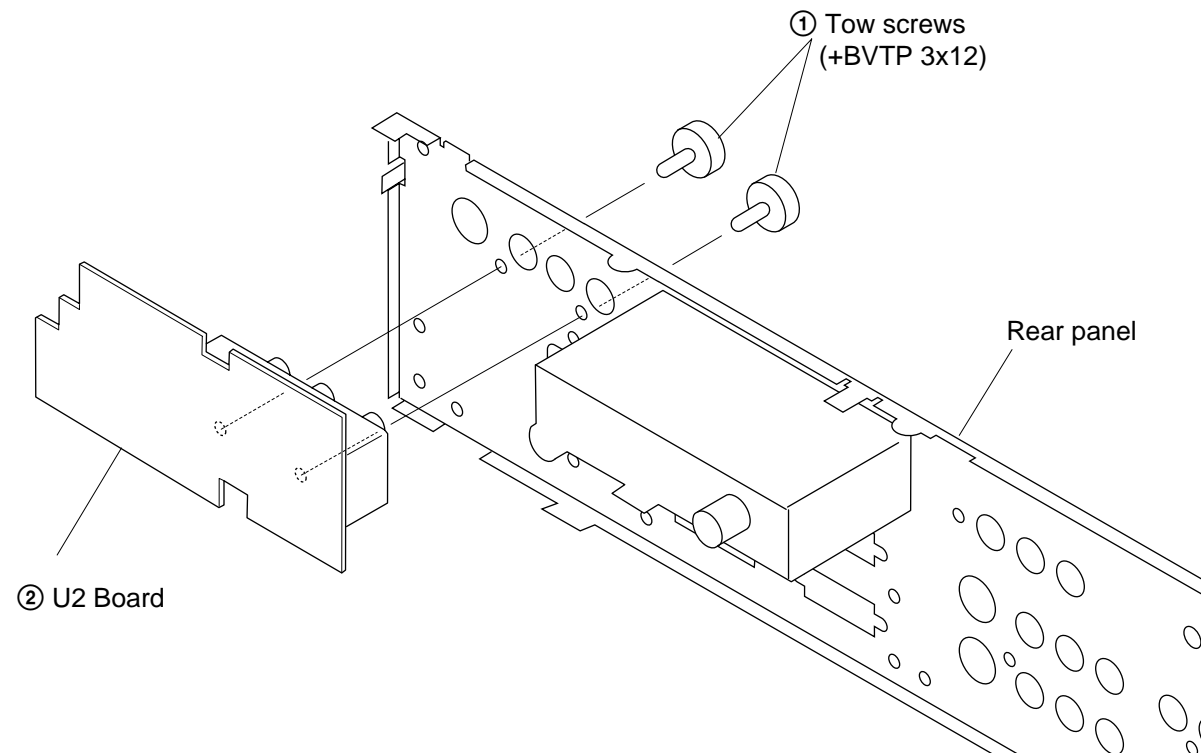



1

## SECTION 2 ADJUSTMENTS

### 2-1. VS, VD Voltage Adjustment (PDM-4200)

<SEAL POSITION>

#### • Preparation for adjustment

1. Slide the DIP switch (S3201) No. 8 of P board to on position with no silkscreen mark ●.
2. Connect a digital voltmeter to the following terminals of G board.

VS voltage=G board TP1701 (VS)-TP1502 (GND)

VD voltage=G board TP1501 (VD)-TP1502 (GND)

3. Connect a AC cord in DISPLAY UNIT.
4. Perform the adjustment in 10 seconds after connecting the cord.

#### • Procedure for adjustment

1. Slide the DIP switch (S3201) No. 7 of P board to on position with no silkscreen mark ●.
2. Confirm the lighting of SONY LOGO LED.
3. Adjust the VS voltage to the following voltage value.

VS voltage  $\pm 0.1V$  of proper value for each model.

Ex.) VS proper value=185V thru 185.6V at 185V.

(Check the proper value with a seal on upper left of panel unit. Refer to right Fig.)


4. Adjust the VD voltage to the following voltage value.

VD voltage  $\pm 0.3V$  of proper value for each model.

Ex.) VD proper value=64.7V thru 65.3V at 65.0V.

(Check the proper value with a seal on upper left of panel unit. Refer to right Fig.)

5. Check a Fan rotation.
6. Slide the DIP Switch (S3201) No. 7 of P board to the off position with the silkscreen mark ●.
7. Slide the DIP Switch (S3201) No. 8 of P board to the off position with the silkscreen mark ●.
8. Disconnect an AC cord of DISPLAY UNIT.
9. Reconnect the AC cord in one second.
10. Assure that "POWER ON/STANDBY" LEDs is flashing amber.

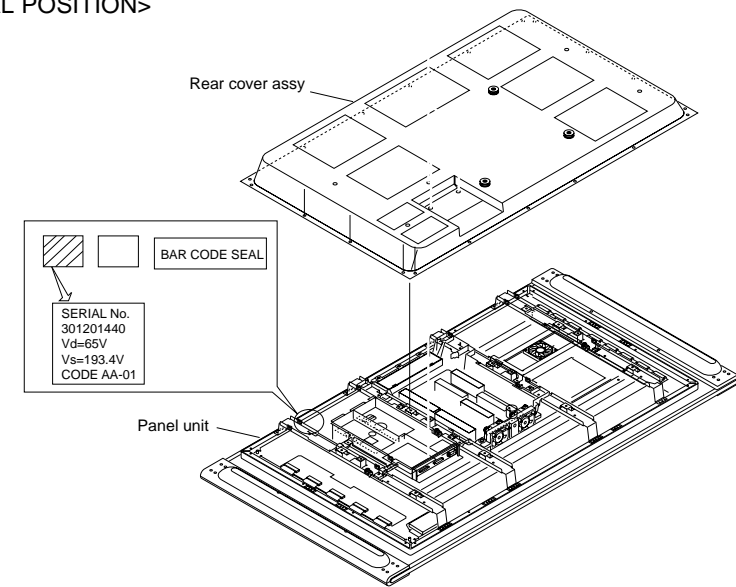

## 2-2. White Balance Adjustment (PDM-4200)

### • Measurement equipment

1. Color analyzer (CA-100 manufactured by MINOLTA)
1. Signal generator (ASTRO DESIGN VG-828D)

### • Measuring procedure

1. Dab the W/B adjustment jig (CA-100) at the glass face of the panel.
2. Connect the Signal generator (VG-828D) to the DVI terminal.
3. Input All-white signal and set the picture mode to DYNAMIC.
4. Select "PNLCTRL" in the service mode menu and set "0 WBNO" at "0"
5. Select "SCNR" "SCNB" of "PDPWB" in the service mode menu, and then adjust following W/B standardized values of 6500K, 8000K, 9300K, 10000K and 13550K to following values of X/Y.

W/B standardized values:

|     | 6500K+8MPCD  | 8000K+8MPCD  | 9300K+8MPCD  | 10000K       | 13550K       |
|-----|--------------|--------------|--------------|--------------|--------------|
| W/B | 0            | 1            | 2            | 3            | 4            |
| X   | 0.3133±0.003 | 0.2944±0.003 | 0.2838±0.003 | 0.2806±0.003 | 0.2684±0.003 |
| Y   | 0.3297±0.003 | 0.3100±0.003 | 0.2981±0.003 | 0.2883±0.003 | 0.2700±0.003 |


6. After adjusting the values, at the values of the "SCNR" or "SCNB" exceeding 128 (initialize value).
  - 1) Reset a larger value of the "SCNR" or "SCNB" at 128.
  - 2) Set the White Balances with the last of items and "SCNG" to the X/Y values above.
7. After the above step, when these item are nonqualified following conditions, set the largest one at 128 and readjust the White Balance with the last two item.
  - 1) No one of "SCNR", "SCNB" and "SCNG" exceeding 128
  - 2) Confirm the item value 128 at least one item
8. As a result above, input the sequential number of value to the "SCNR", "SCNB" and "SCNG".
9. Repeat the same step 5 thru 8 for the W/B 1 thru 4 after setting the "0 WBNO" at each W/B number.

10. Input following signals from the Signal generator (VG-828D).

- 1) All-white signal (255/255) input Y (luminance)=45cd/m<sup>2</sup> or more
- 2) 1/25 Window (255/255) input Y (luminance)=45cd/m<sup>2</sup> or more

### • Service mode lists

Caution: 1. Setting functions of Display section are displayed with yellow OSD.

2. Be careful not to set DATA in the yellow-covered OSD menu. The setting will be memorized.
3.  items are not required adjustment or are banned adjustment

| Category | Item |      | Function                | Data range | Initialize value | Device Name<br>(Slave Address) |
|----------|------|------|-------------------------|------------|------------------|--------------------------------|
|          | No.  | Name |                         |            |                  |                                |
| PDPWB    | 00   | SCNR | Sub contrast RED gain   | 0-255      | 128              | CXD9738R                       |
|          | 01   | SCNG | Sub contrast GREEN gain | 0-255      | 128              |                                |
|          | 02   | SCNB | Sub contrast BLUE gain  | 0-255      | 128              |                                |
|          | 03   | SBR  | Sub brightness RED      | 0-255      | 128(Fix)         |                                |
|          | 04   | SBRG | Sub brightness GREEN    | 0-255      | 128(Fix)         |                                |
|          | 05   | SBRB | Sub brightness BLUE     | 0-255      | 128(fix)         |                                |

| Category | Item |      | Function | Data range | Initialize value | Device Name<br>(Slave Address) |
|----------|------|------|----------|------------|------------------|--------------------------------|
|          | No.  | Name |          |            |                  |                                |
| PDPSHAP  | 00   | CRMD |          |            |                  |                                |
|          | 01   | HTAP |          |            |                  |                                |
|          | 02   | VTAP |          |            |                  |                                |
|          | 03   | AGCM |          |            |                  |                                |
|          | 04   | EDDL |          |            |                  |                                |
|          | 05   | EDGA |          |            |                  |                                |
|          | 06   | EDNM |          |            |                  |                                |
|          | 07   | EDDE |          |            |                  |                                |
|          | 08   | DHVS |          |            |                  |                                |

| Category | Item |      | Function | Data range | Initialize value | Device Name<br>(Slave Address) |
|----------|------|------|----------|------------|------------------|--------------------------------|
|          | No.  | Name |          |            |                  |                                |
| PDPGMMMA | 00   | GMMA |          |            |                  |                                |
|          | 01   | GMR0 |          |            |                  |                                |
|          | 02   | GMR1 |          |            |                  |                                |
|          | 03   | GMR2 |          |            |                  |                                |
|          | 04   | GMR3 |          |            |                  |                                |
|          | 05   | GMR4 |          |            |                  |                                |
|          | 06   | GMR5 |          |            |                  |                                |
|          | 07   | GMR6 |          |            |                  |                                |
|          | 08   | GMR7 |          |            |                  |                                |
|          | 09   | GMR8 |          |            |                  |                                |
|          | 10   | GMR9 |          |            |                  |                                |
|          | 11   | GMRA |          |            |                  |                                |
|          | 12   | GMG0 |          |            |                  |                                |
|          | 13   | GMG1 |          |            |                  |                                |
|          | 14   | GMG2 |          |            |                  |                                |
|          | 15   | GMG3 |          |            |                  |                                |
|          | 16   | GMG4 |          |            |                  |                                |
|          | 17   | GMG5 |          |            |                  |                                |
|          | 18   | GMG6 |          |            |                  |                                |
|          | 19   | GMG7 |          |            |                  |                                |
|          | 20   | GMG8 |          |            |                  |                                |
|          | 21   | GMG9 |          |            |                  |                                |
|          | 22   | GMGA |          |            |                  |                                |
|          | 23   | GMB0 |          |            |                  |                                |
|          | 24   | GMB1 |          |            |                  |                                |
|          | 25   | GMB2 |          |            |                  |                                |
|          | 26   | GMB3 |          |            |                  |                                |
|          | 27   | GMB4 |          |            |                  |                                |
|          | 28   | GMB5 |          |            |                  |                                |
|          | 29   | GMB6 |          |            |                  |                                |
|          | 30   | GMB7 |          |            |                  |                                |
|          | 31   | GMB8 |          |            |                  |                                |
|          | 32   | GMB9 |          |            |                  |                                |
|          | 33   | GMBA |          |            |                  |                                |

| Category | Item |      | Function | Data range | Initialize value | Device Name<br>(Slave Address) |
|----------|------|------|----------|------------|------------------|--------------------------------|
|          | No.  | Name |          |            |                  |                                |
| PDPPLE   | 00   | PLE0 |          |            |                  |                                |
|          | 01   | PLE1 |          |            |                  |                                |
|          | 02   | PLE2 |          |            |                  |                                |
|          | 03   | PLE3 |          |            |                  |                                |
|          | 04   | PLE4 |          |            |                  |                                |
|          | 05   | PLE5 |          |            |                  |                                |
|          | 06   | PLE6 |          |            |                  |                                |
|          | 07   | PLE7 |          |            |                  |                                |
|          | 08   | PLE8 |          |            |                  |                                |
|          | 09   | PLE9 |          |            |                  |                                |
|          | 10   | PLEA |          |            |                  |                                |
|          | 11   | LMAX |          |            |                  |                                |
|          | 12   | LMIN |          |            |                  |                                |
|          | 13   | GAIN |          |            |                  |                                |
|          | 14   | OFFS |          |            |                  |                                |
|          | 15   | SAFL |          |            |                  |                                |
|          | 16   | LIFH |          |            |                  |                                |
|          | 17   | SPLE |          |            |                  |                                |

| Category | Item |      | Function | Data range | Initialize value | Device Name<br>(Slave Address) |
|----------|------|------|----------|------------|------------------|--------------------------------|
|          | No.  | Name |          |            |                  |                                |
| PDPDPIC  | 00   | TLVL |          |            |                  |                                |
|          | 01   | TFVL |          |            |                  |                                |
|          | 02   | THLD |          |            |                  |                                |
|          | 03   | PLVL |          |            |                  |                                |
|          | 04   | PFIL |          |            |                  |                                |
|          | 05   | PHLD |          |            |                  |                                |
|          | 06   | PGUP |          |            |                  |                                |
|          | 07   | PGDN |          |            |                  |                                |
|          | 08   | PHIS |          |            |                  |                                |
|          | 09   | PGAN |          |            |                  |                                |


| Category  | Item |      | Function | Data range | Initialize value | Device Name<br>(Slave Address) |
|-----------|------|------|----------|------------|------------------|--------------------------------|
|           | No.  | Name |          |            |                  |                                |
| PDPDISPOS | 00   | VAR1 |          |            |                  |                                |
|           | 01   | VAR2 |          |            |                  |                                |
|           | 02   | HTLL |          |            |                  |                                |
|           | 03   | HTLM |          |            |                  |                                |
|           | 04   | VTLL |          |            |                  |                                |
|           | 05   | VTLM |          |            |                  |                                |
|           | 06   | HS1L |          |            |                  |                                |
|           | 07   | VS1M |          |            |                  |                                |
|           | 08   | HE1L |          |            |                  |                                |
|           | 09   | HE1M |          |            |                  |                                |
|           | 10   | VS1L |          |            |                  |                                |
|           | 11   | VS1M |          |            |                  |                                |
|           | 12   | VE1L |          |            |                  |                                |
|           | 13   | VE1M |          |            |                  |                                |
|           | 14   | HS2L |          |            |                  |                                |
|           | 15   | HS2M |          |            |                  |                                |
|           | 16   | HE2L |          |            |                  |                                |
|           | 17   | HE2M |          |            |                  |                                |
|           | 18   | VS2L |          |            |                  |                                |
|           | 19   | VS2M |          |            |                  |                                |
|           | 20   | VE2L |          |            |                  |                                |
|           | 21   | VE2M |          |            |                  |                                |
|           | 22   | V1SH |          |            |                  |                                |
|           | 23   | V1DT |          |            |                  |                                |
|           | 24   | V1AP |          |            |                  |                                |
|           | 25   | V2SH |          |            |                  |                                |
|           | 26   | V2DT |          |            |                  |                                |
|           | 27   | V2AP |          |            |                  |                                |

| Category | Item |      | Function | Data range | Initialize value | Device Name<br>(Slave Address) |
|----------|------|------|----------|------------|------------------|--------------------------------|
|          | No.  | Name |          |            |                  |                                |
| PDPSTAT  | 00   | SRNU |          |            |                  |                                |
|          | 01   | SRNL |          |            |                  |                                |
|          | 02   | ROMV |          |            |                  |                                |
|          | 03   | OPTM |          |            |                  |                                |


| Category | Item |      | Function | Data range | Initialize value | Device Name<br>(Slave Address) |
|----------|------|------|----------|------------|------------------|--------------------------------|
|          | No.  | Name |          |            |                  |                                |
| PDPOTHER | 00   | DTMD |          |            |                  |                                |
|          | 01   | VIDT |          |            |                  |                                |
|          | 02   | CODE |          |            |                  |                                |
|          | 03   | ORBT |          |            |                  |                                |
|          | 04   | FV   |          |            |                  |                                |

# 1 SECTION 3 TROUBLESHOOTING


## 3-1. DISPLAY UNIT (PDM-4200)

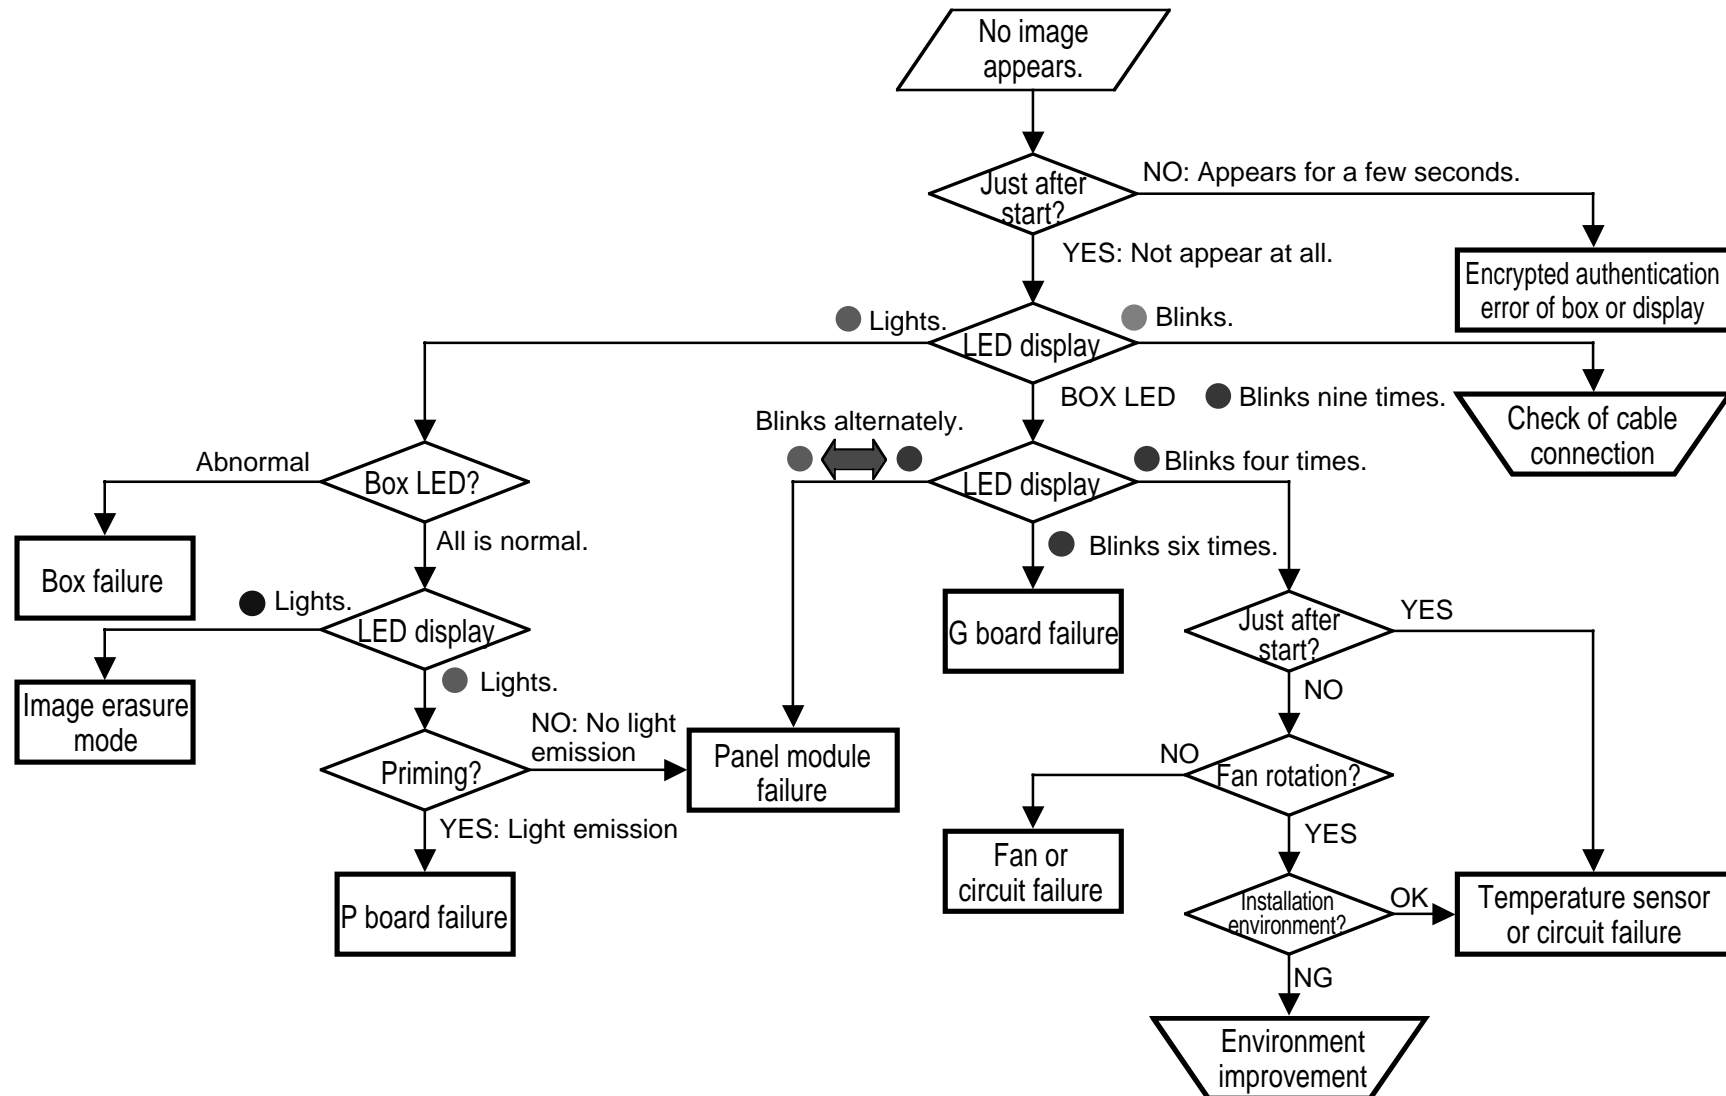


## 3-2. MEDIA RECEIVER UNIT (MBT-XBR900)



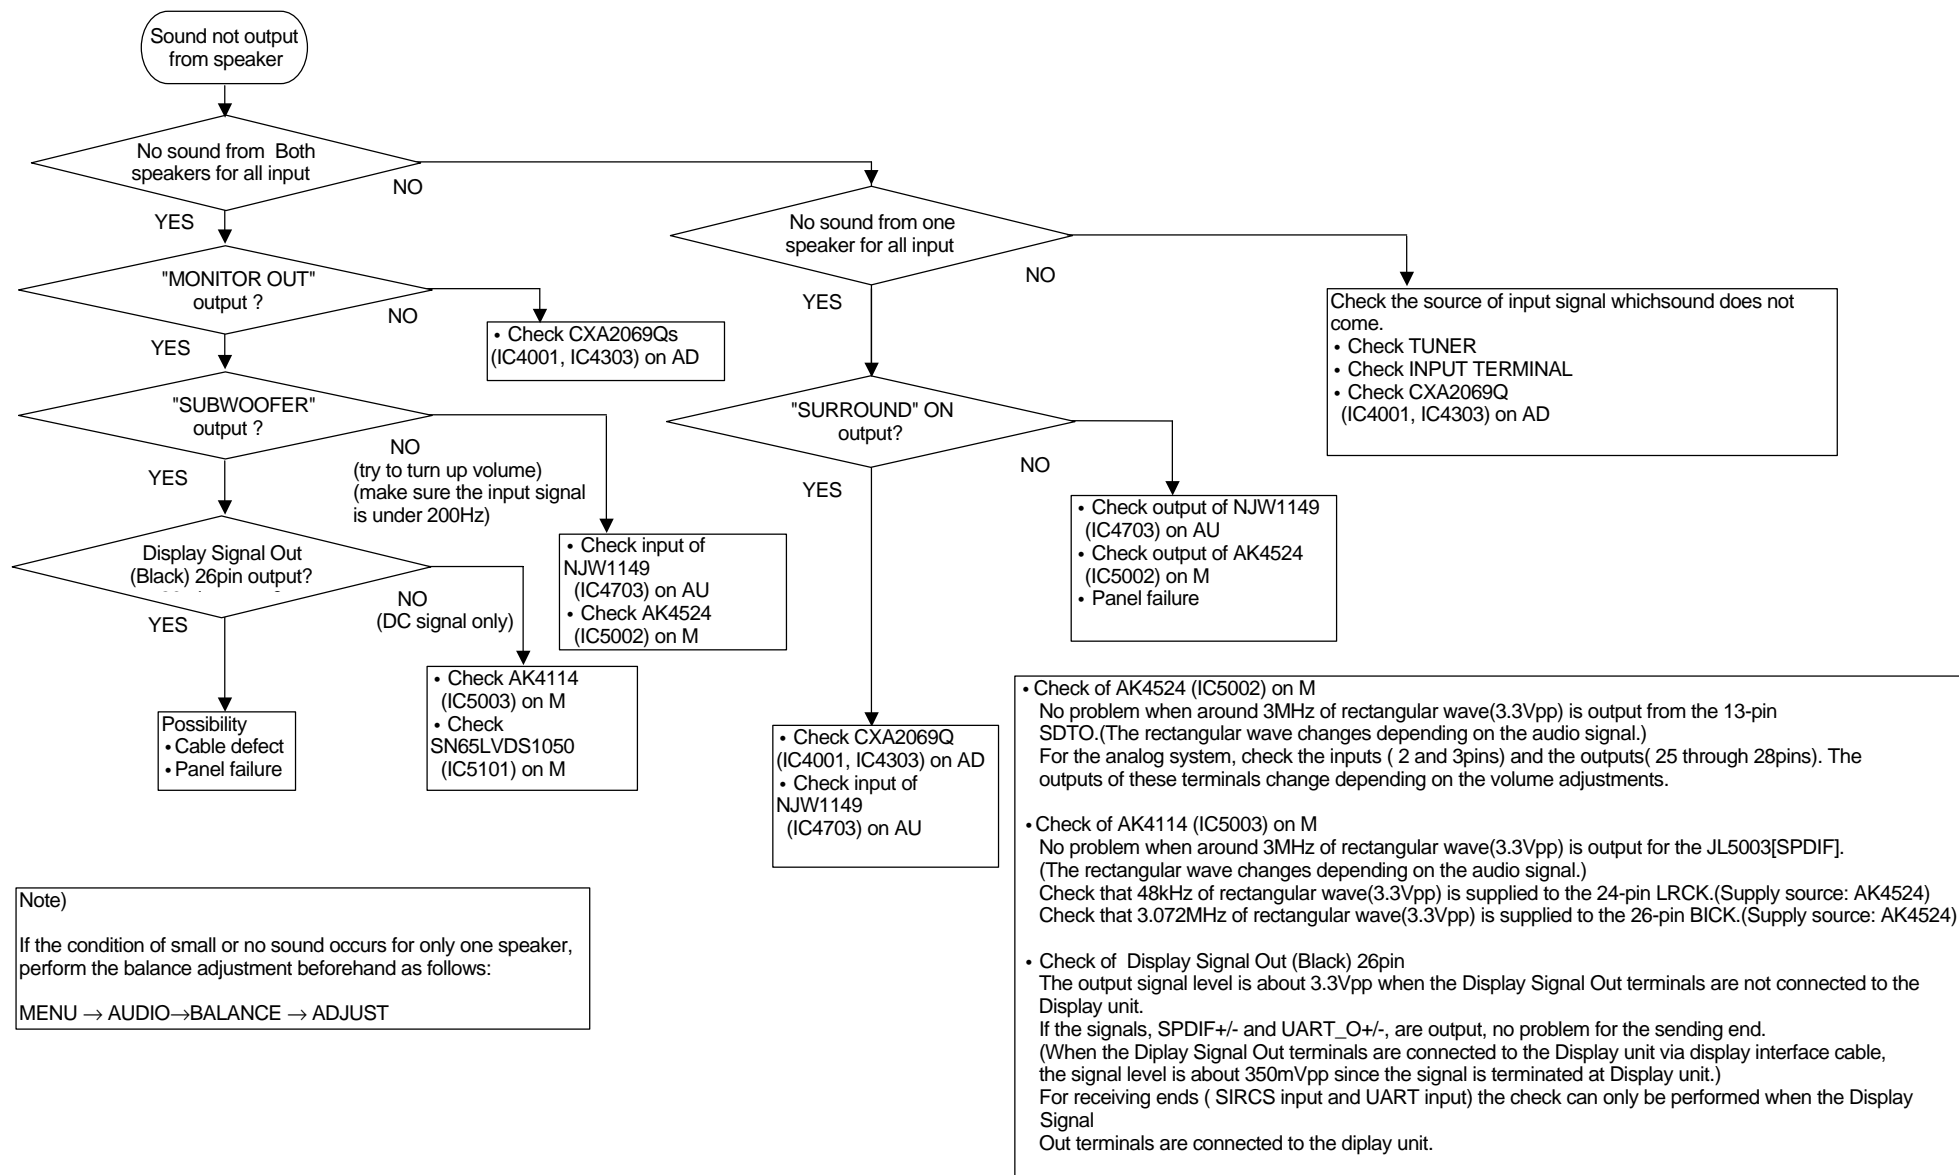


#### 4-1-1. DISPLAY UNIT (PDM-4200)





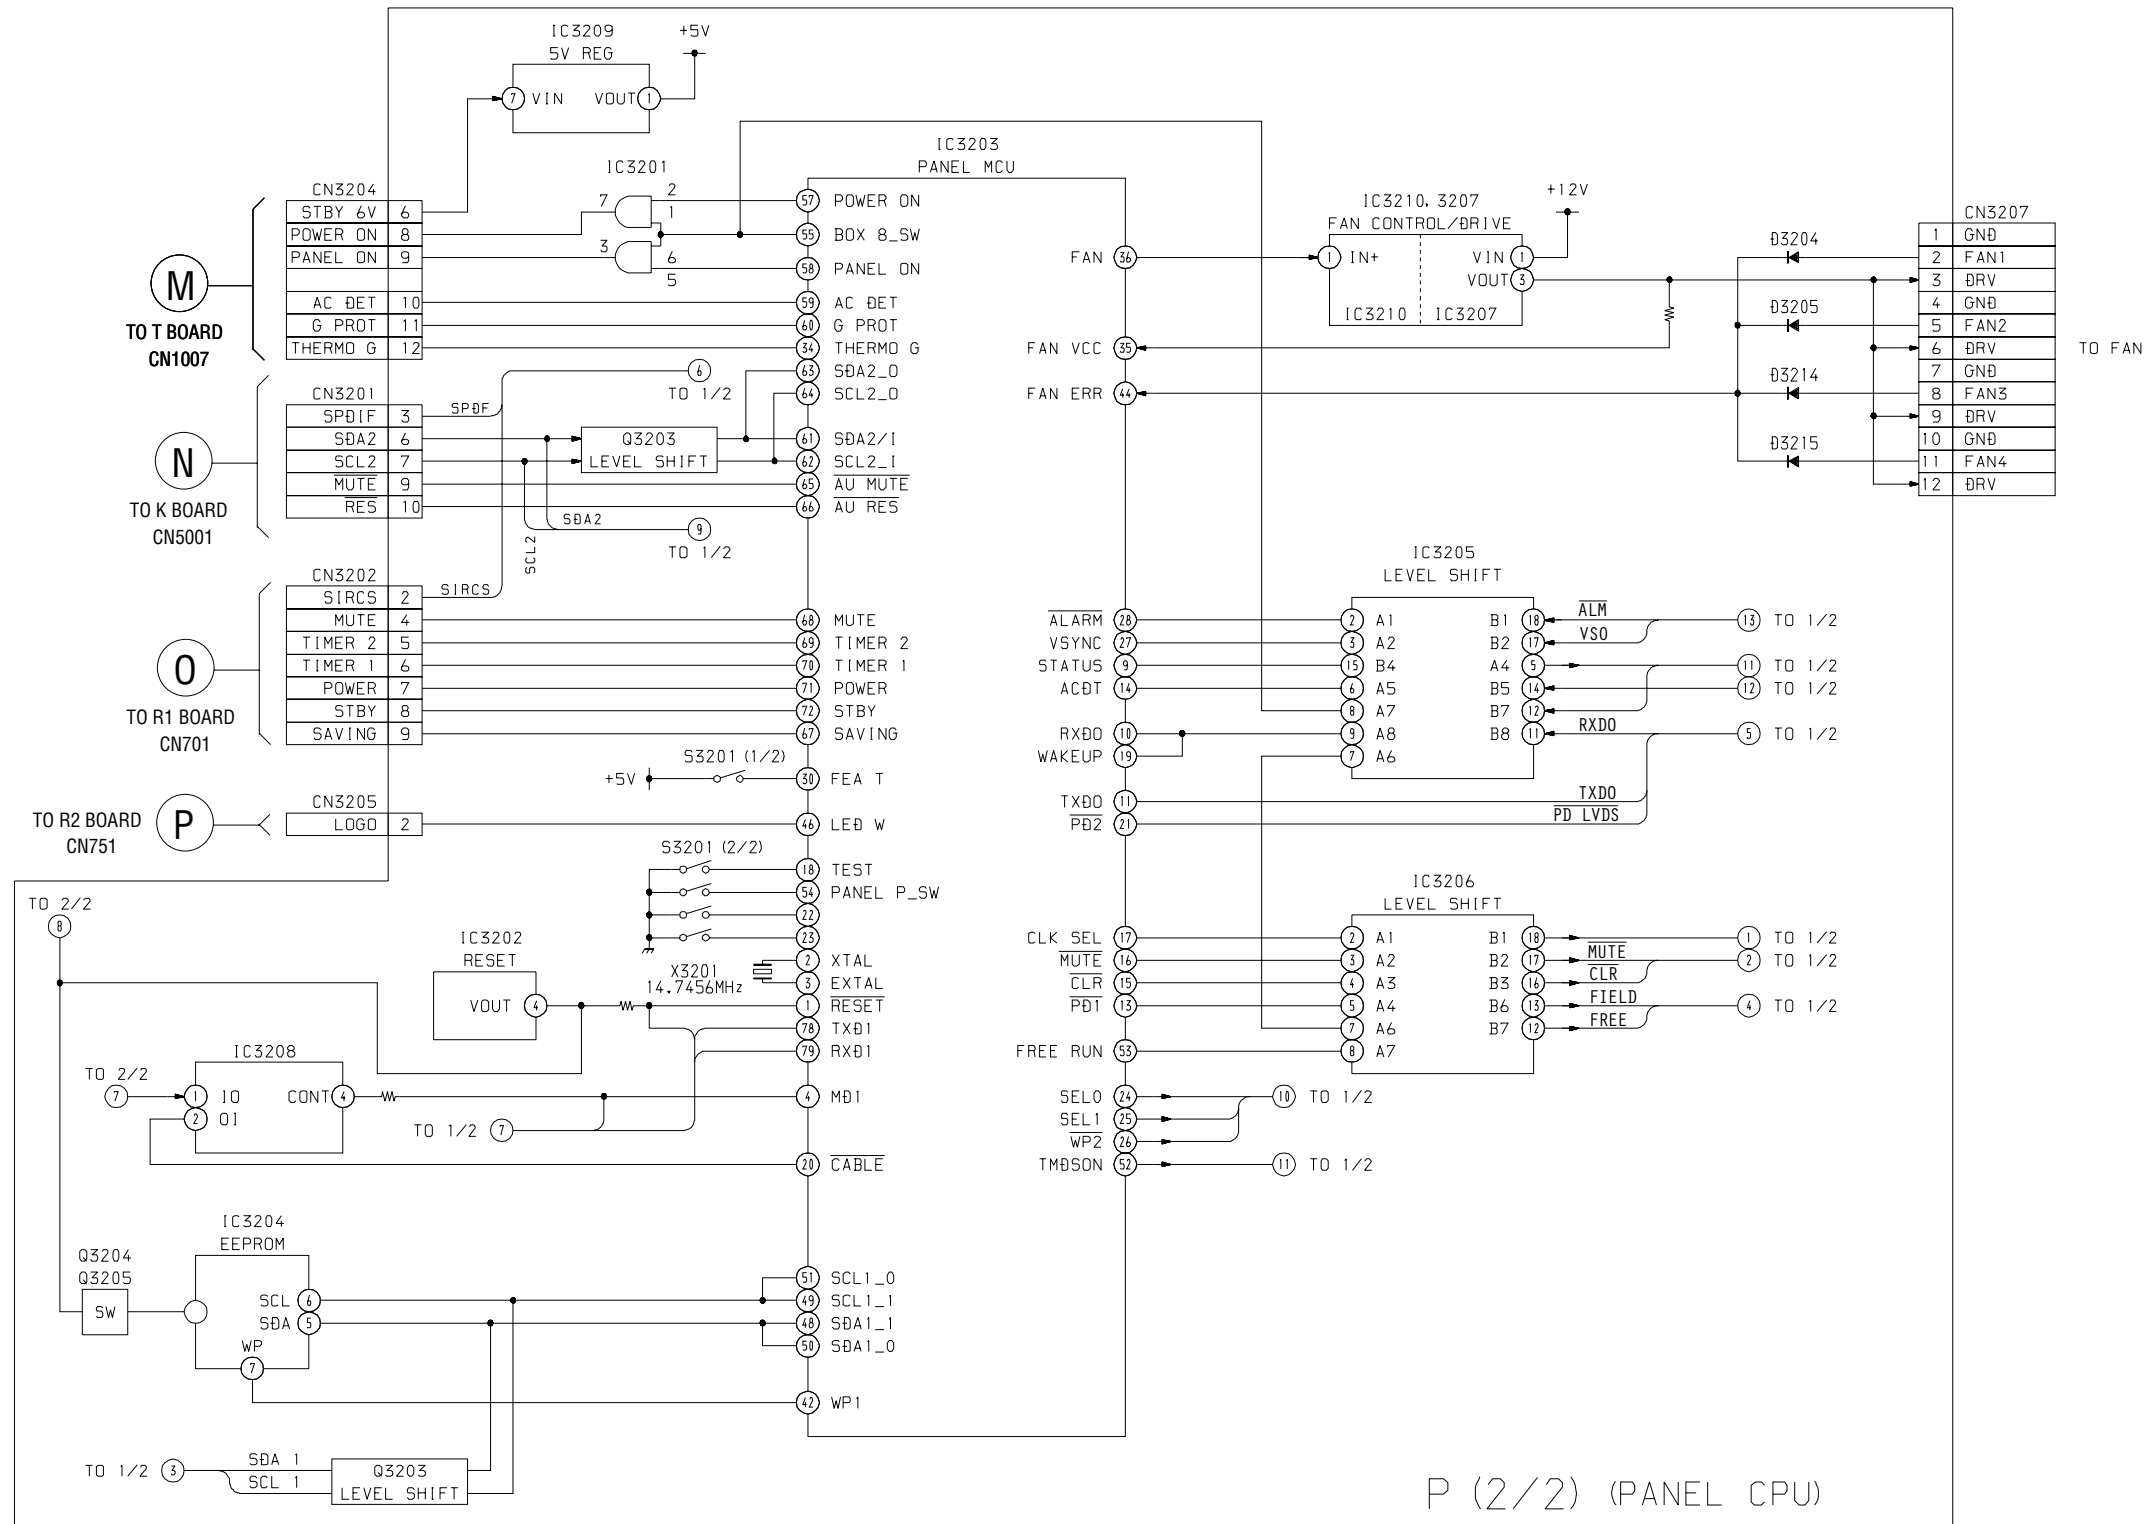




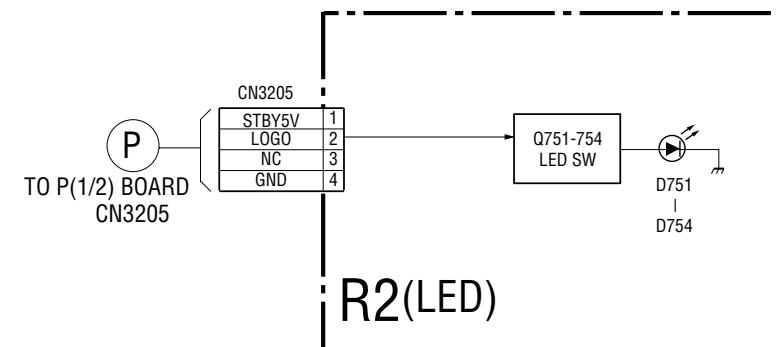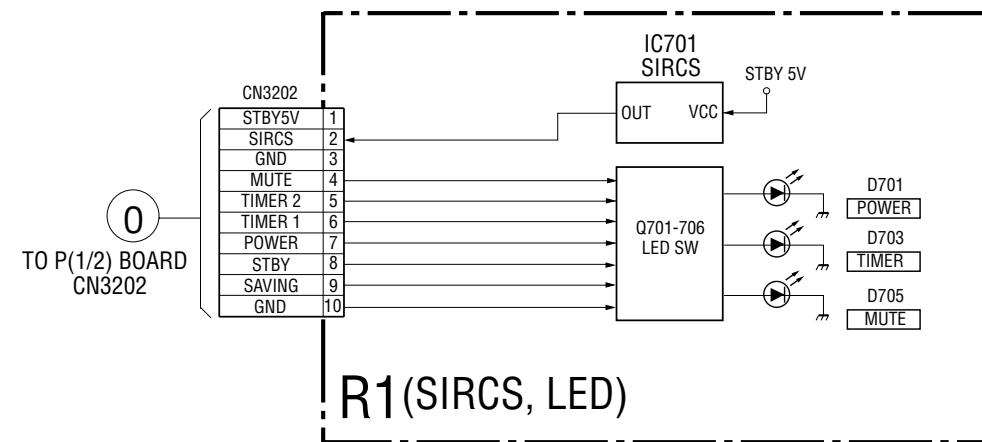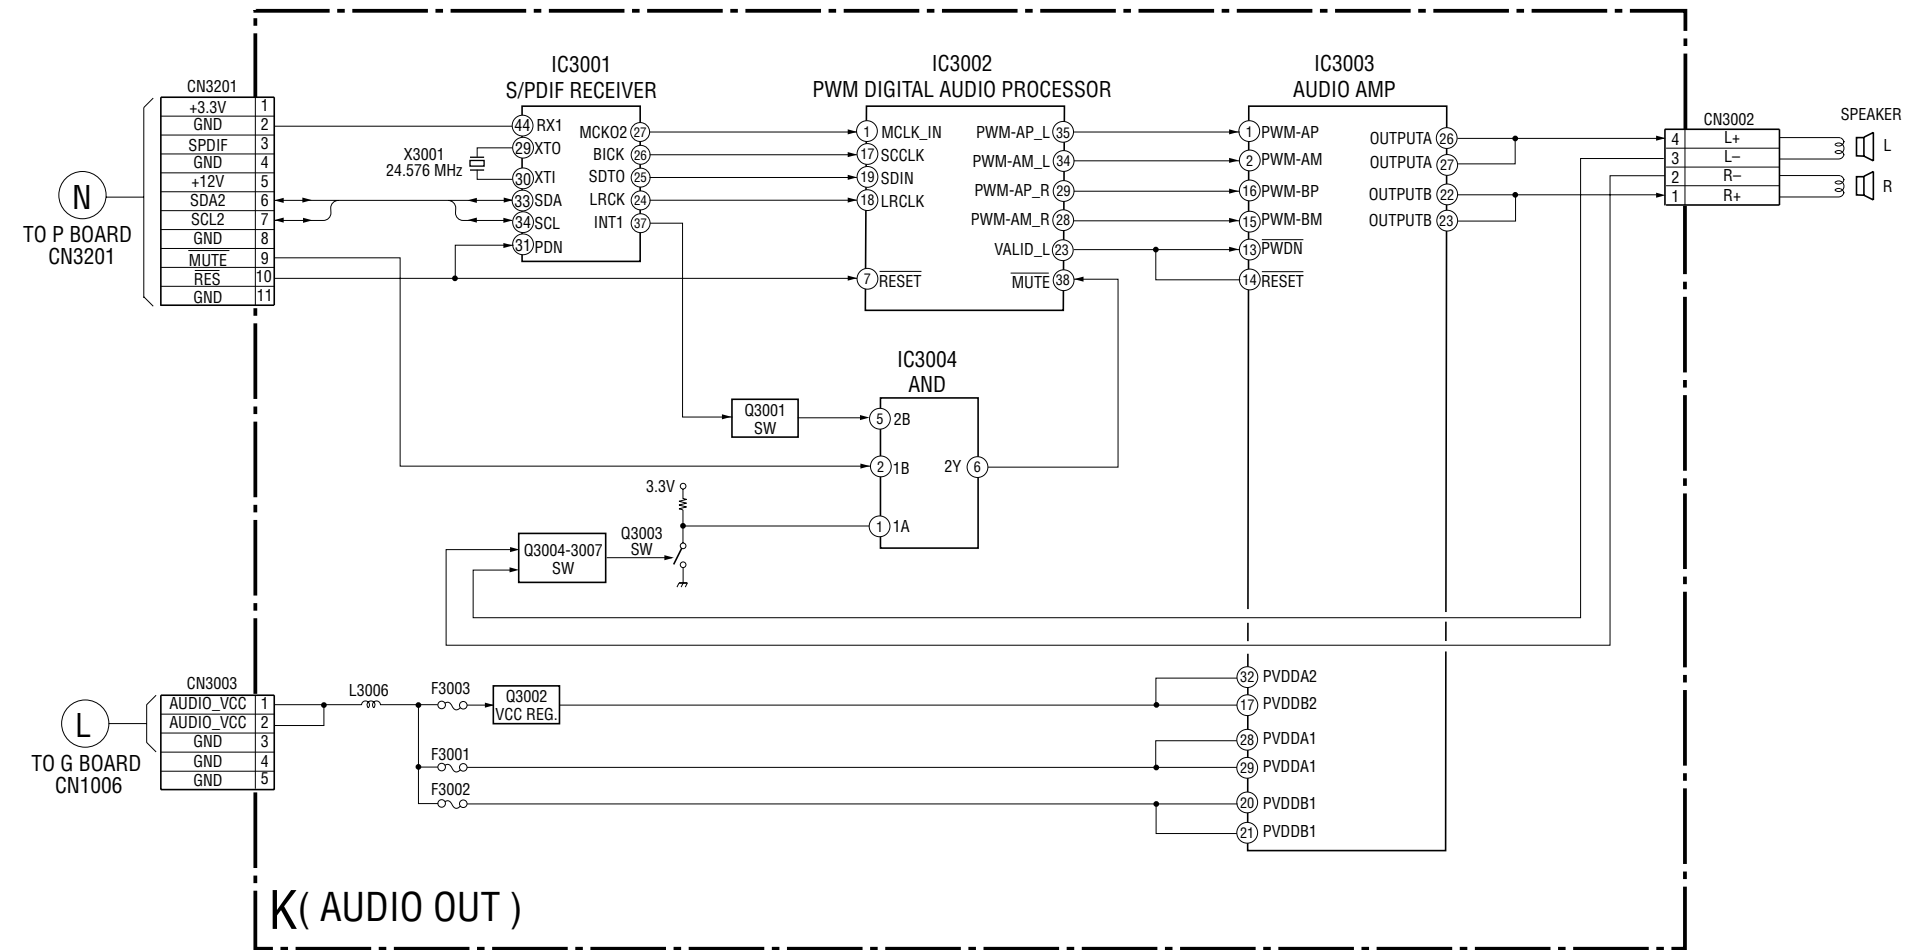




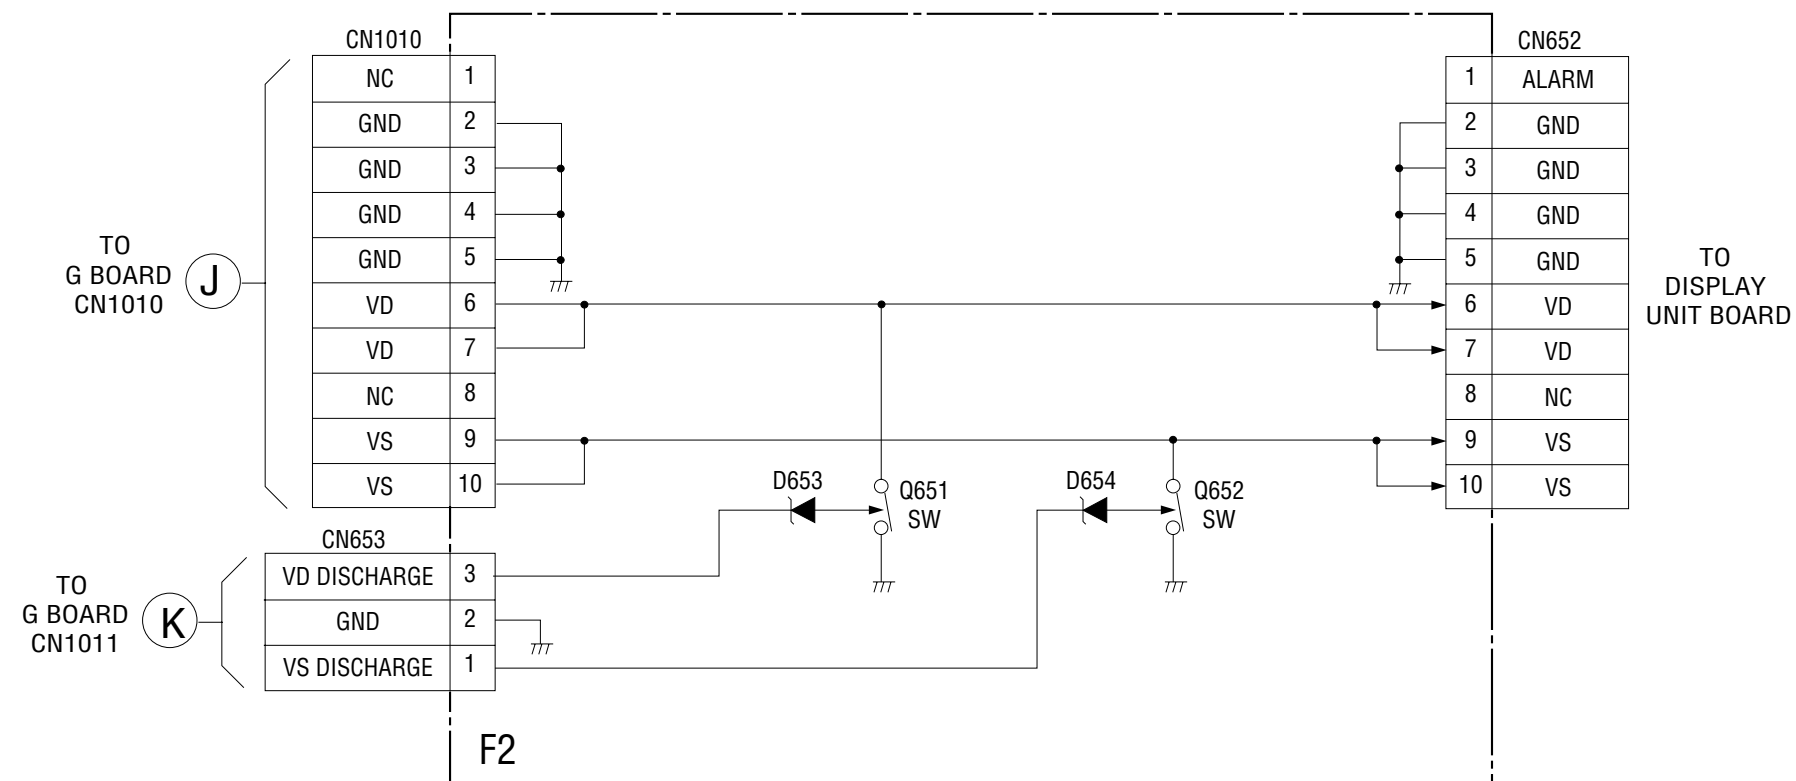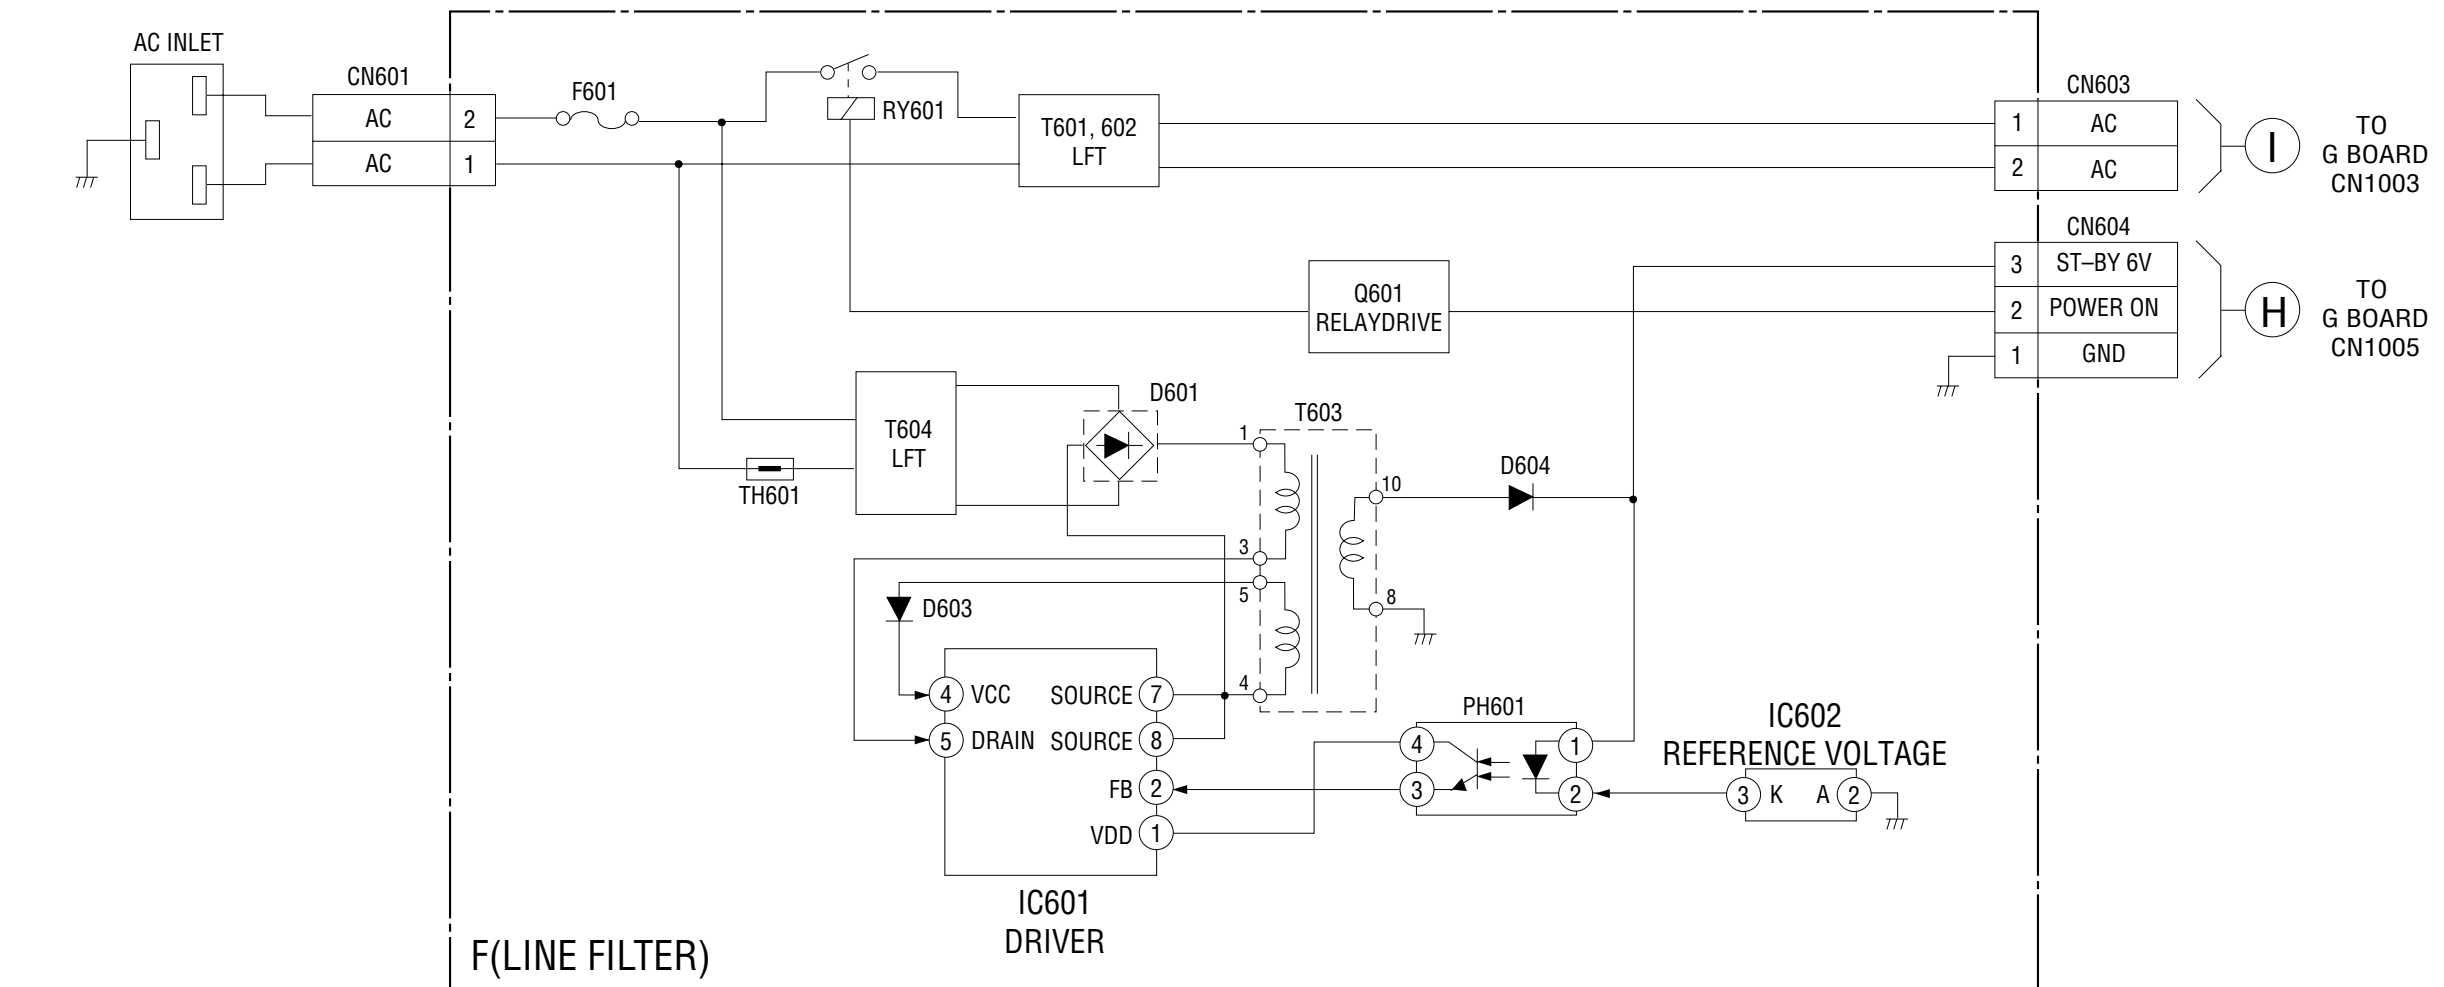



#### 4-1-2. MEDIA RECEIVER UNIT (MBT-XBR900)

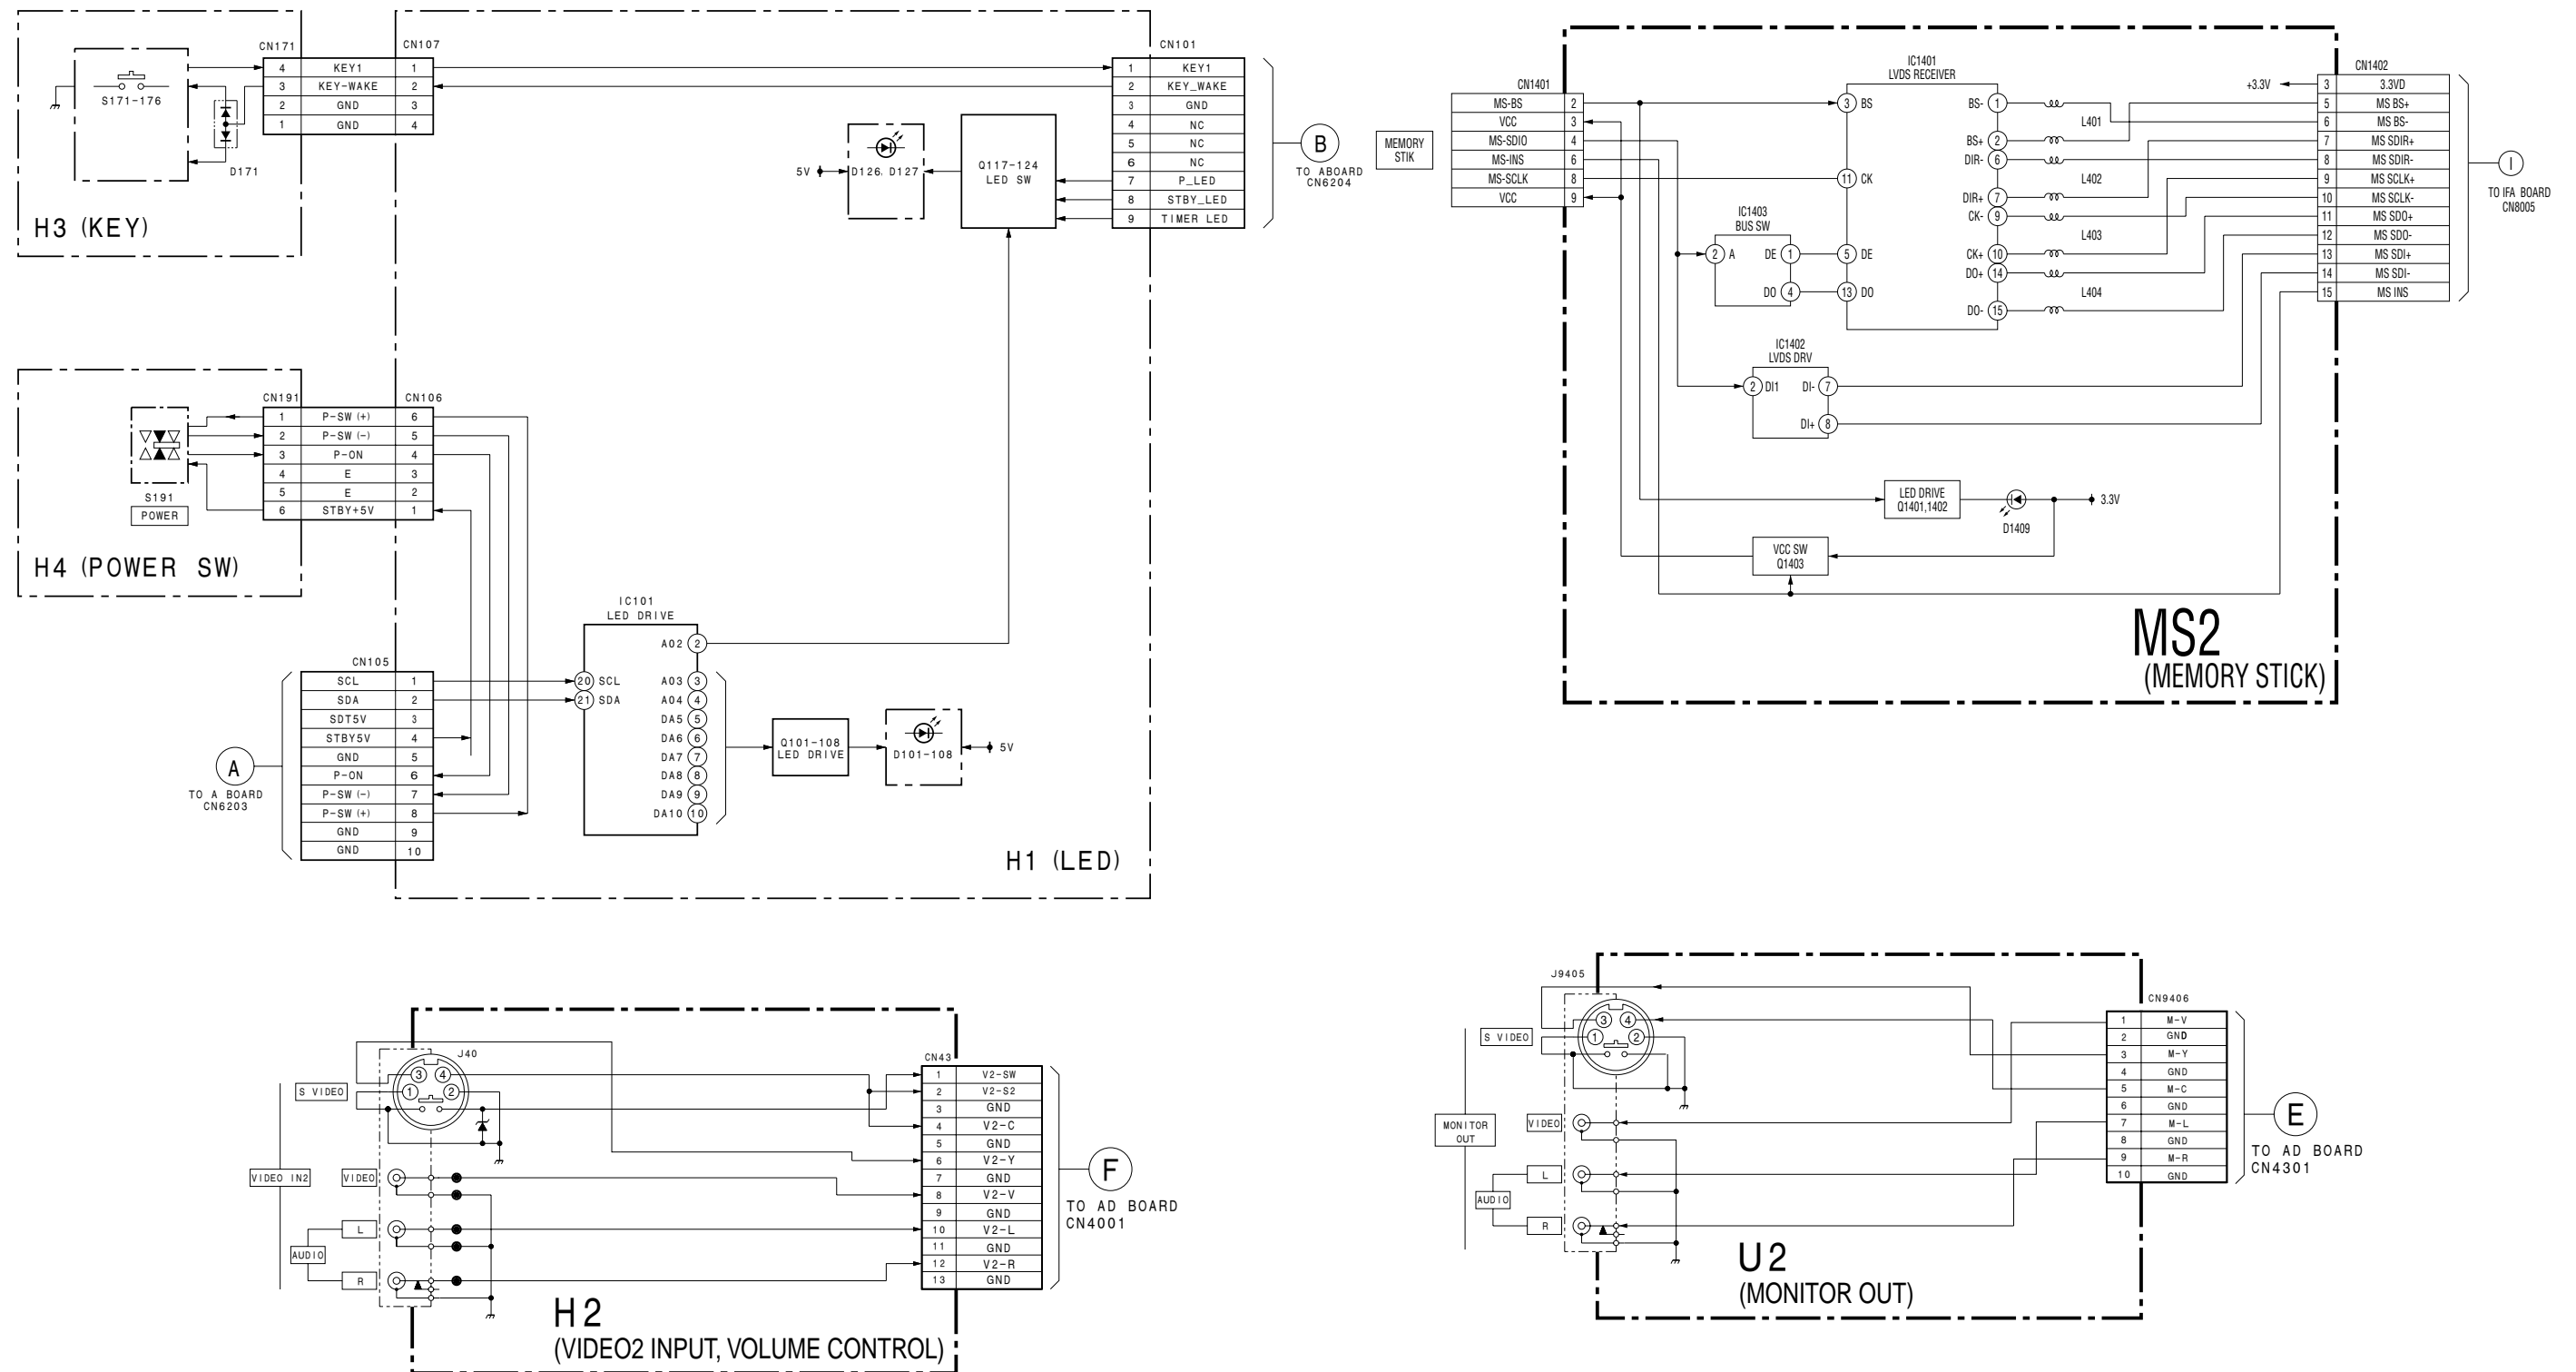







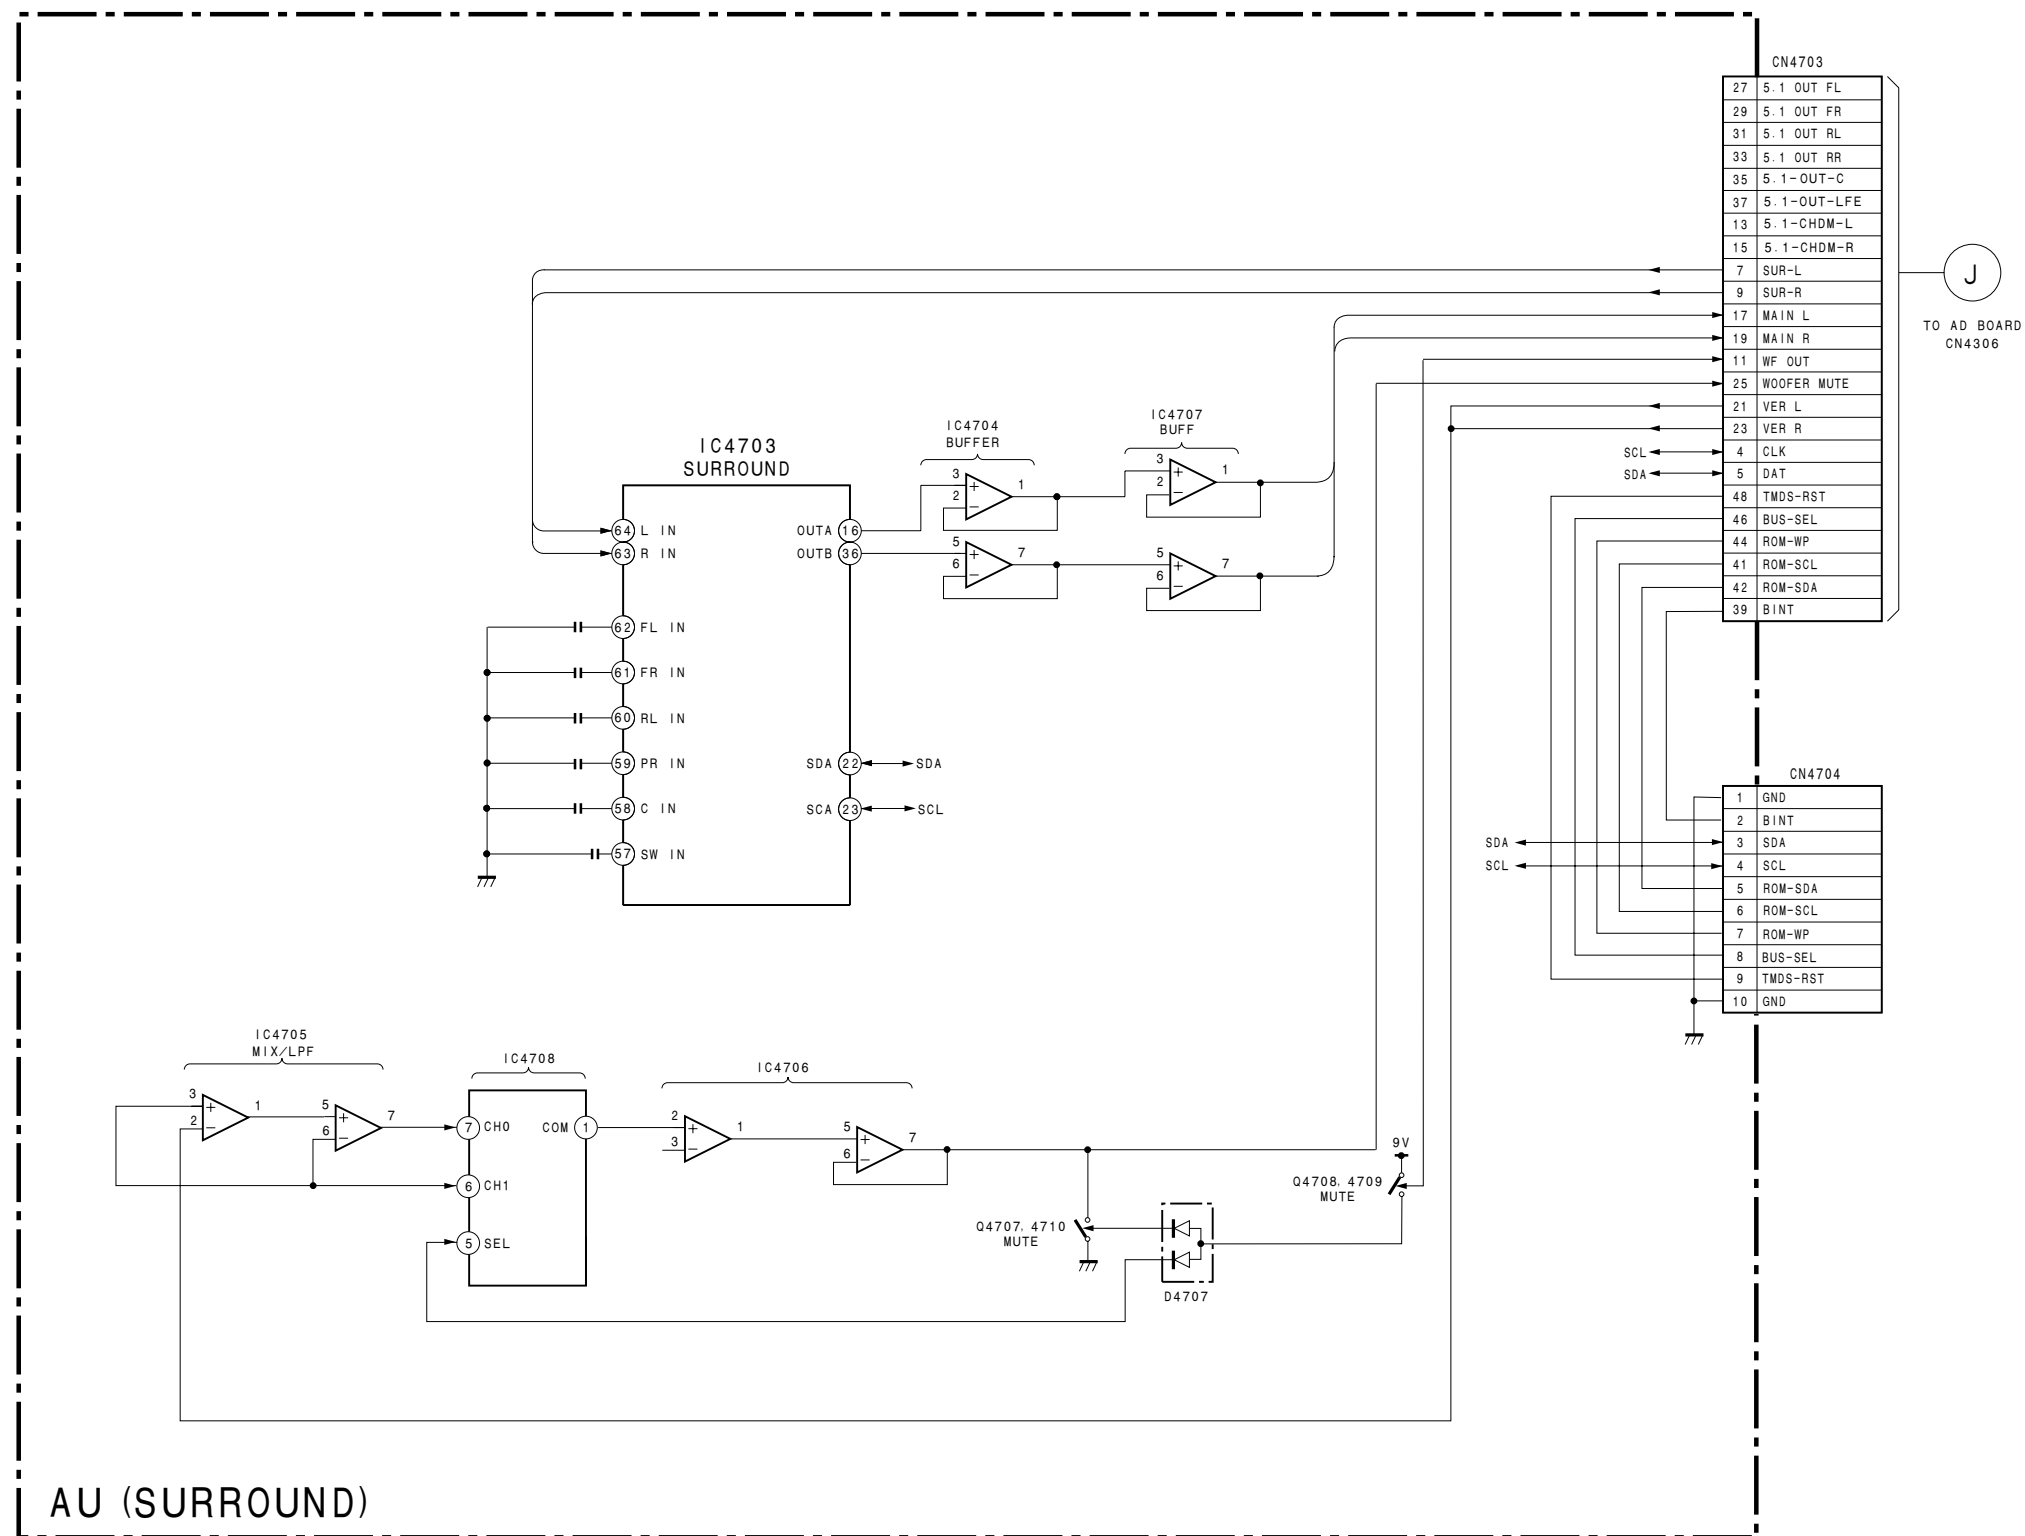






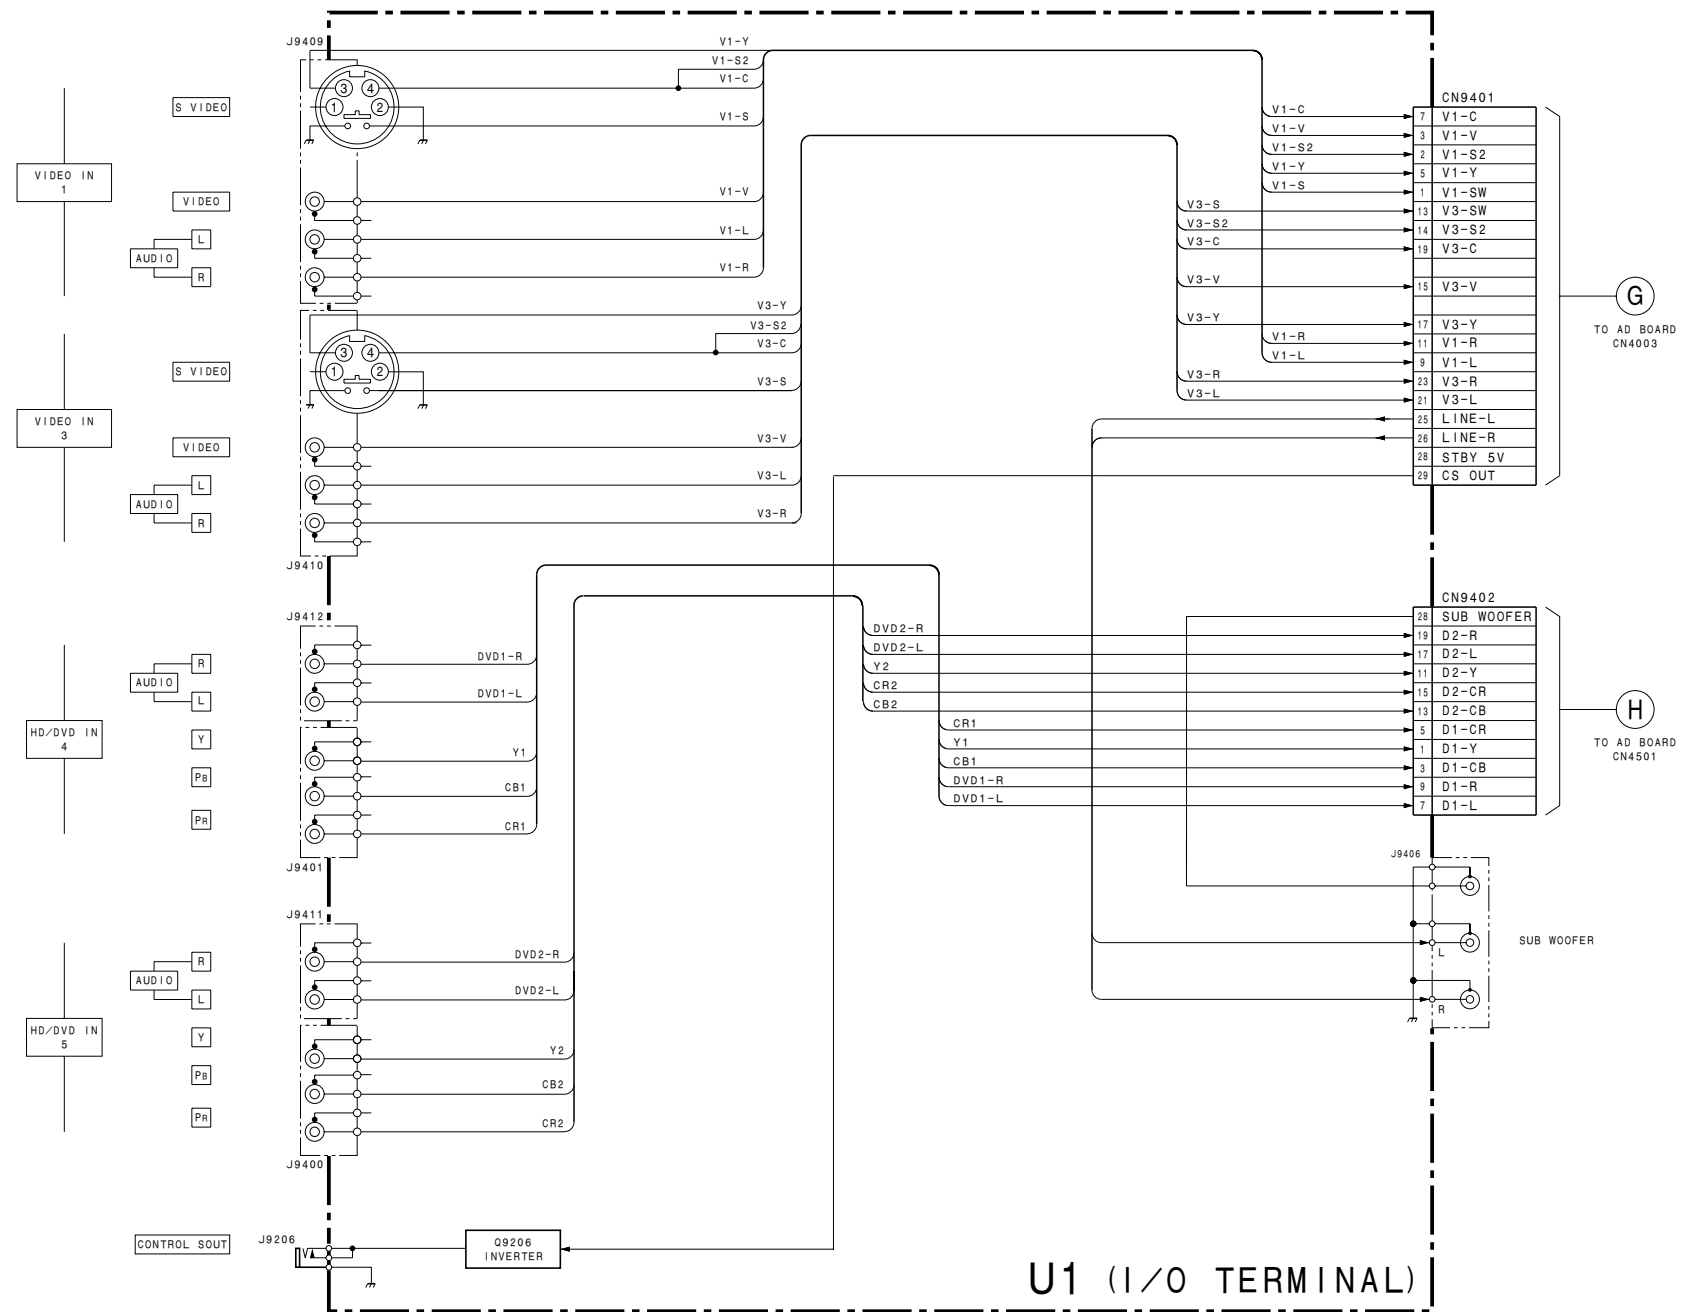

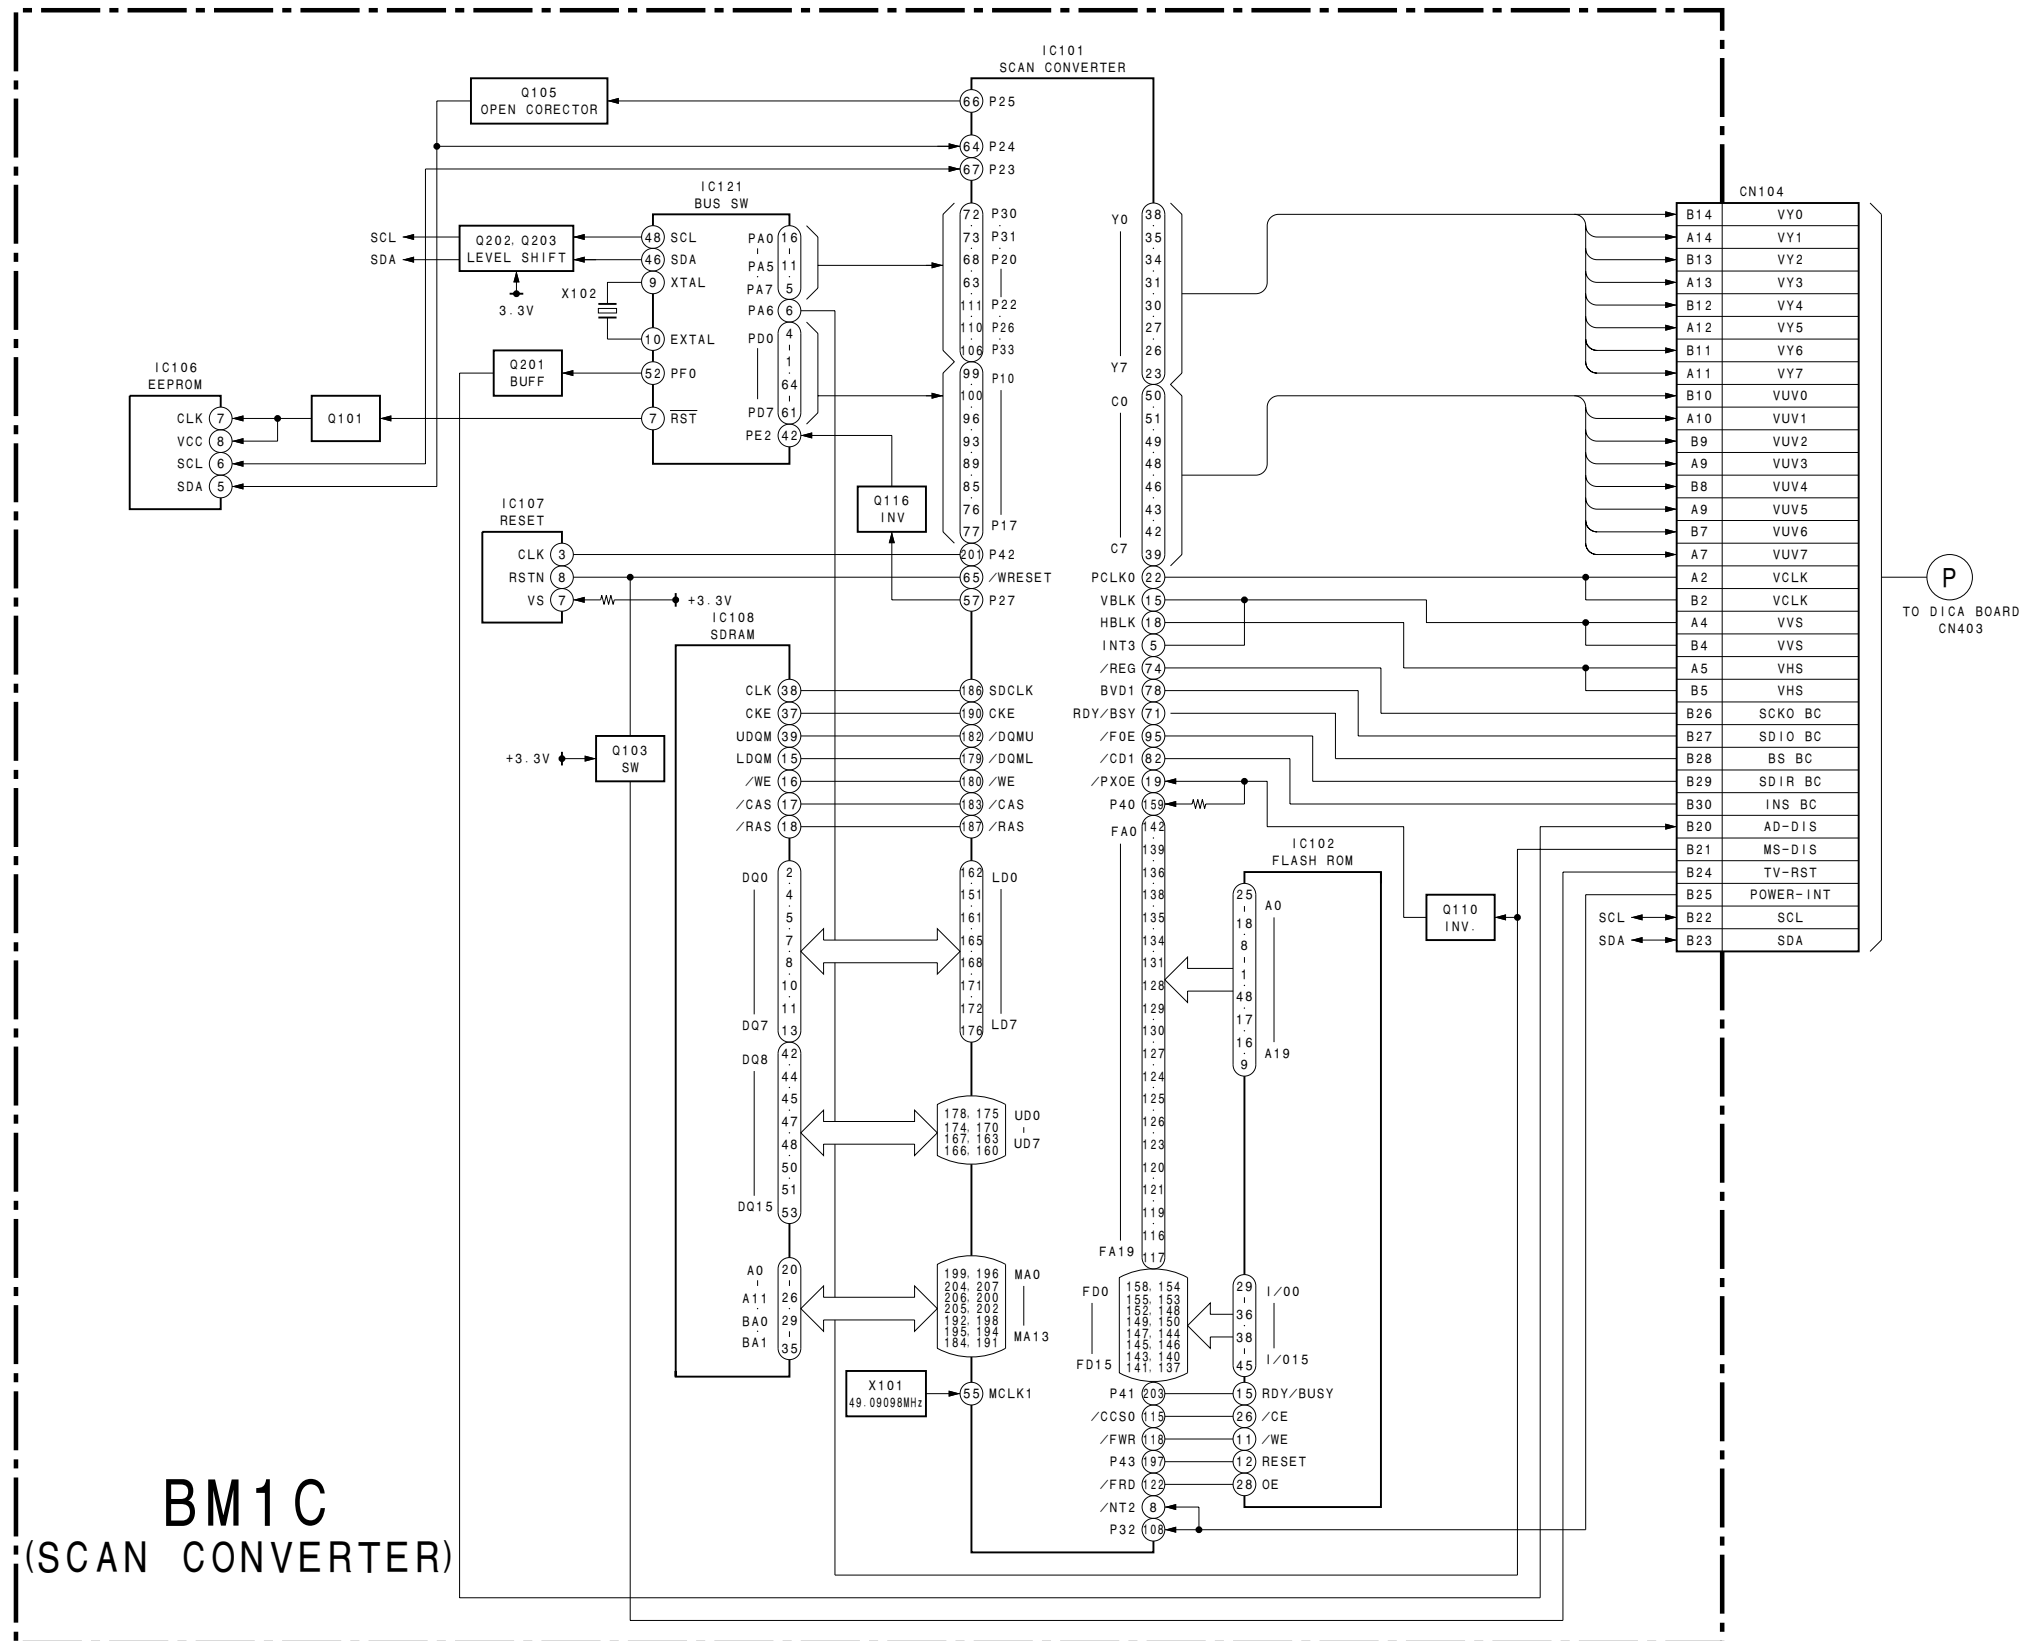




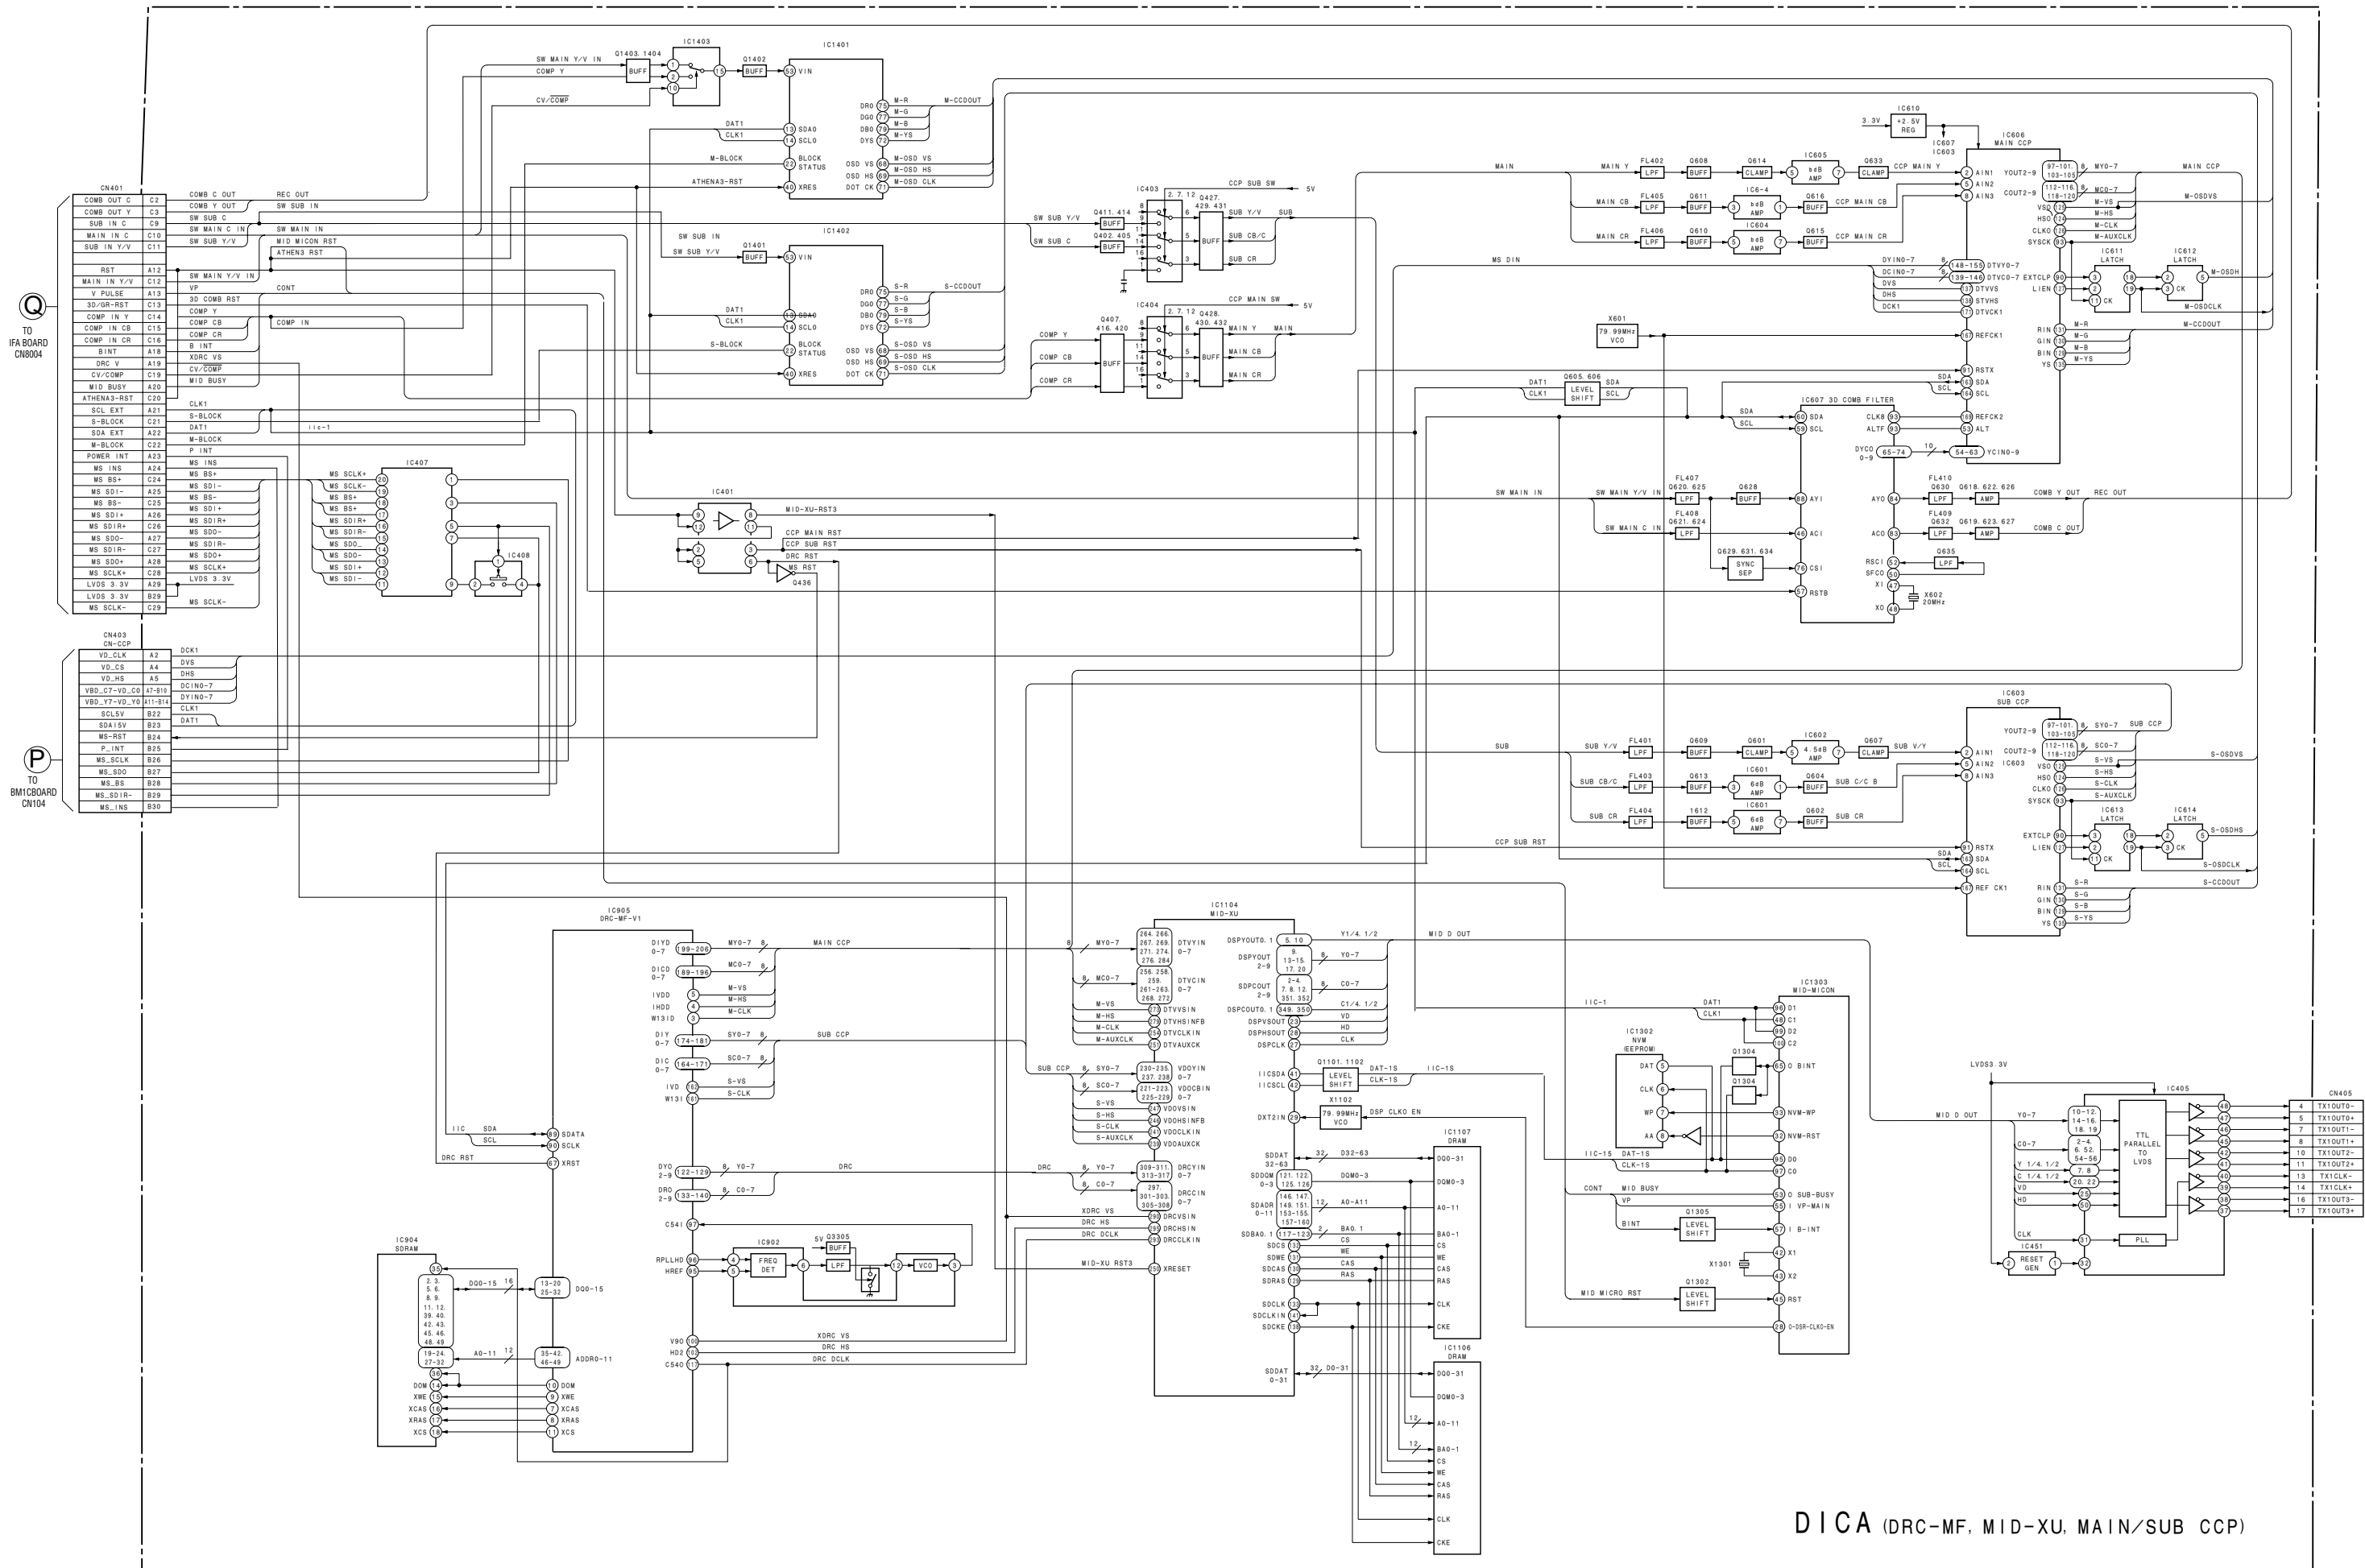


DICA (DRC-MF, MID-XU, MAIN/SUB CCP)

## 4-2. FRAME DIAGRAM

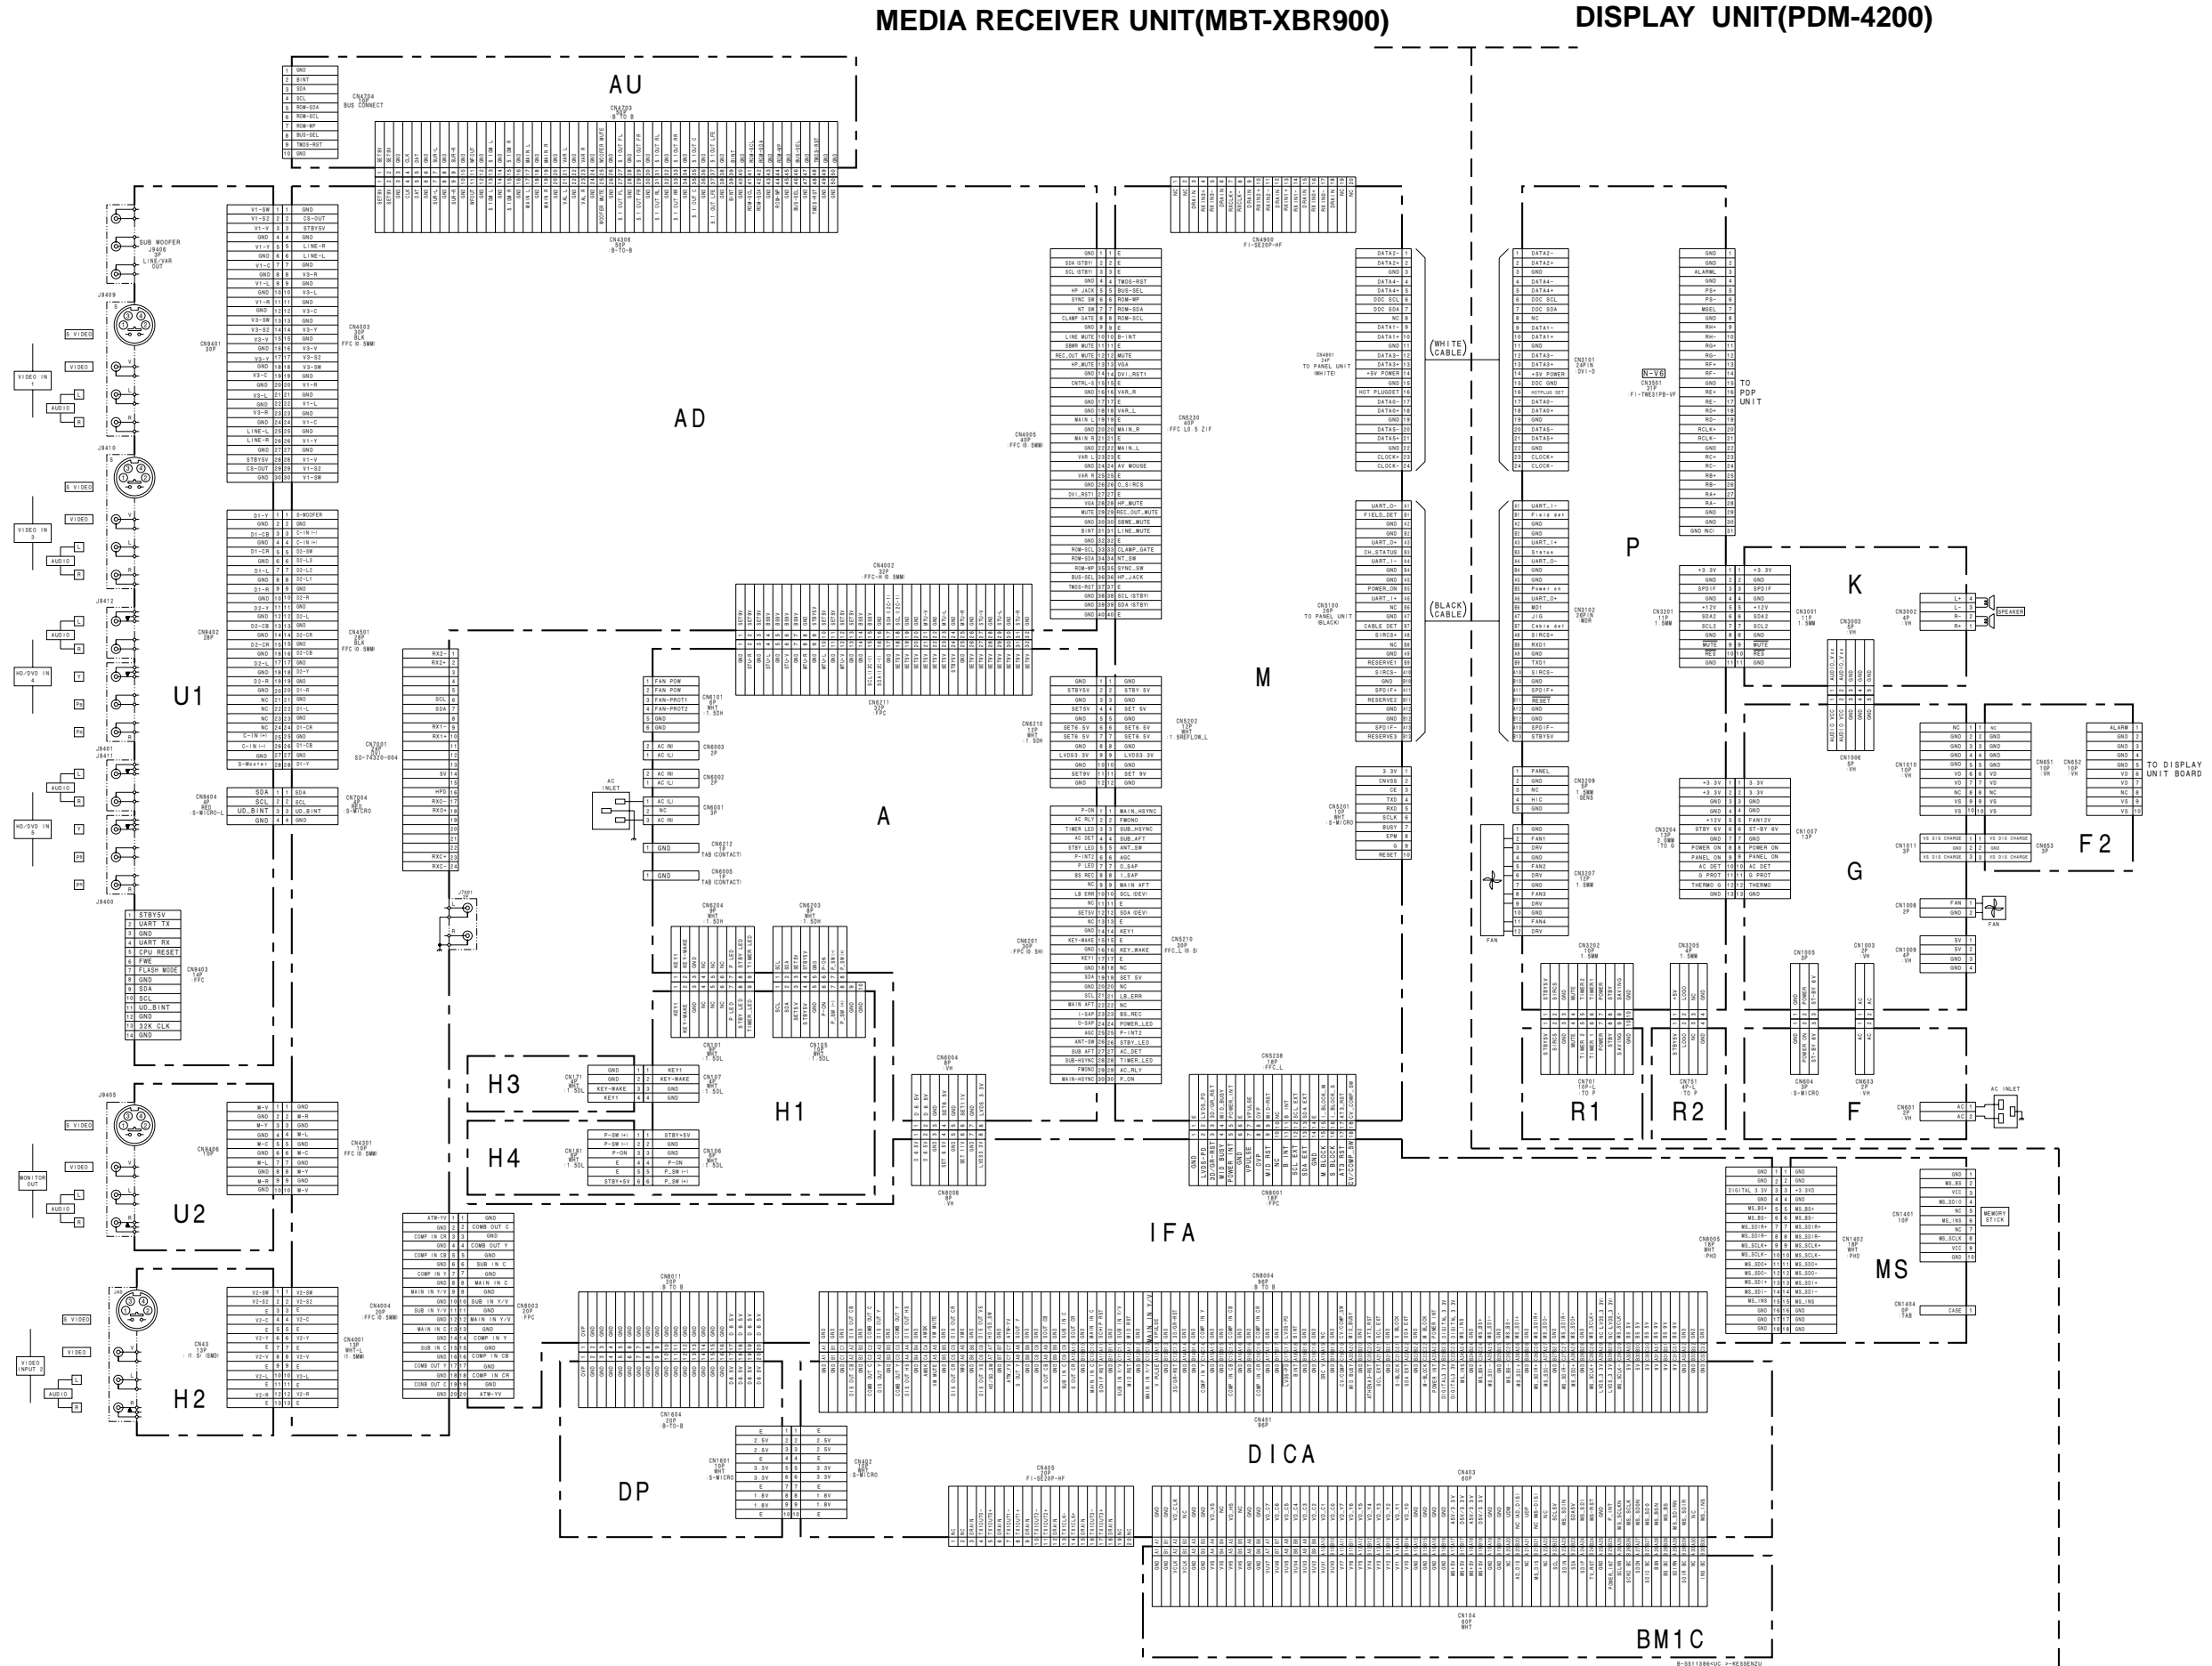


## 4-3. CIRCUIT BOARDS LOCATION

### 4-3-1. DISPLAY UNIT (PDM-4200)

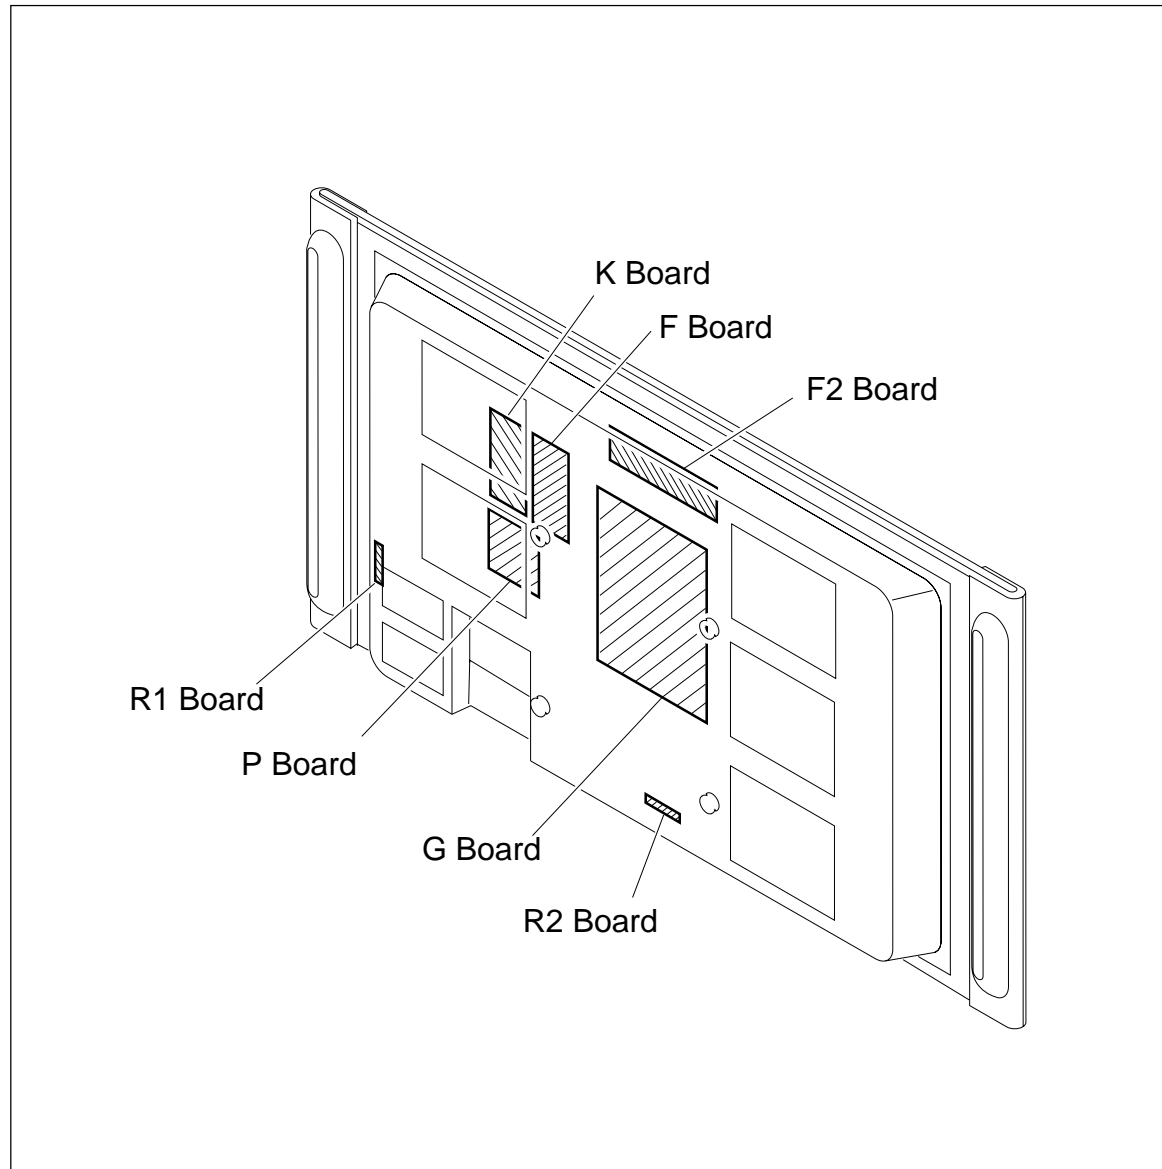

#### 4-3-2. MEDIA RECEIVER UNIT (MBT-XBR900)

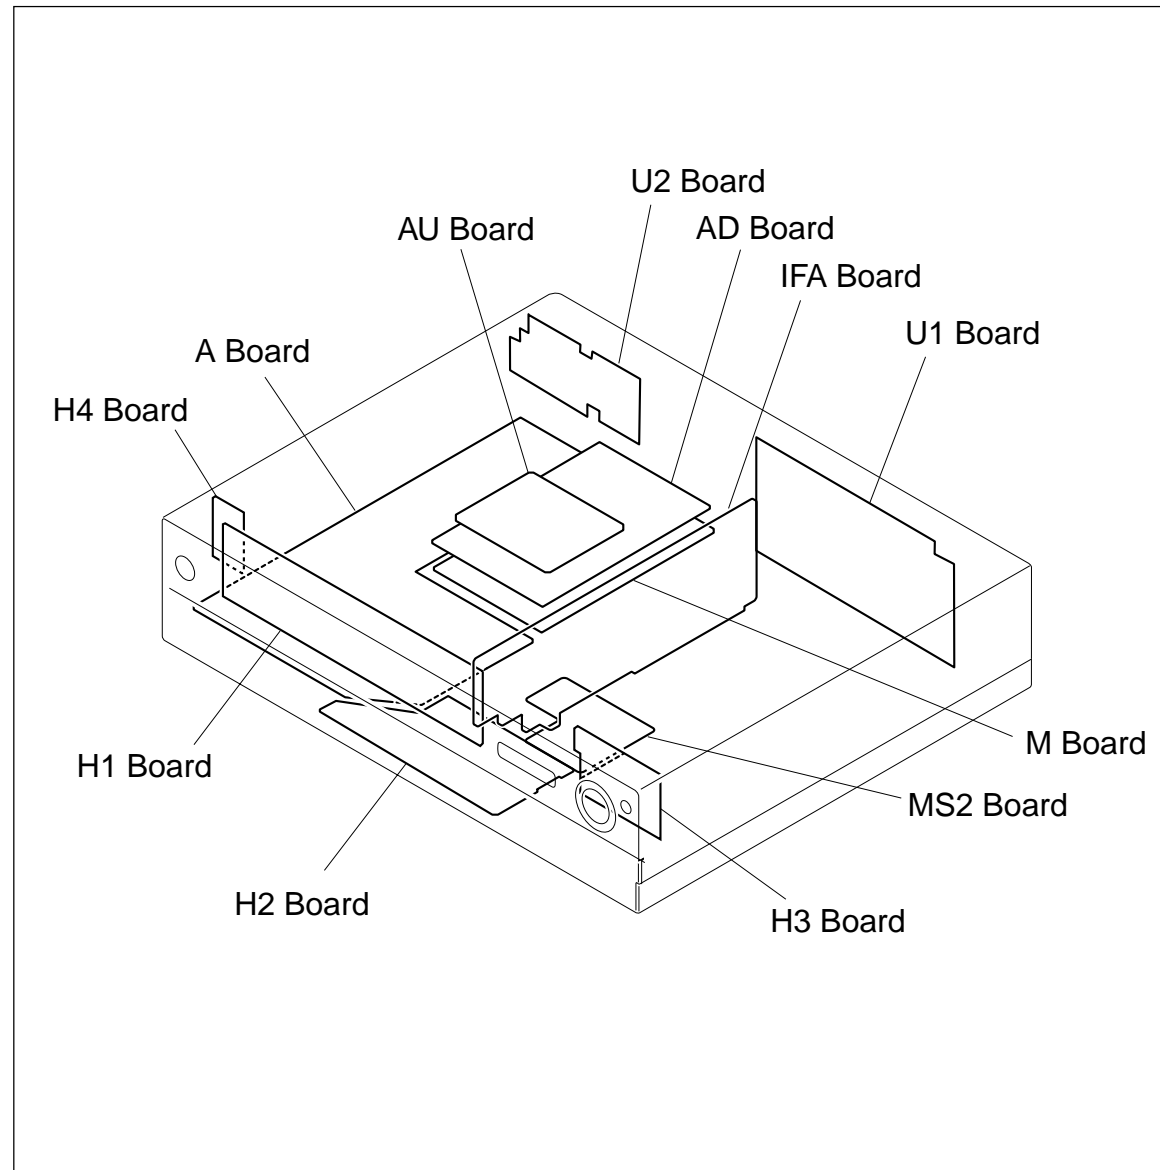









# 4-4. SCHEMATIC DIAGRAMS AND PRINTED WIRING BOARDS

**Note:**

- All capacitors are in  $\mu\text{F}$  unless otherwise noted. (pF:  $\mu\text{F}$ )  
Capacitors without voltage indication are all 50 V.
- Indication of resistance, which does not have one for rating electrical power, is as follows.

Pitch: 5 mm

Rating electrical power 1/4 W (CHIP : 1/10 W)


- All resistors are in ohms.
-  : nonflammable resistor.
-  : fusible resistor.
-  : internal component.
-  : panel designation, and adjustment for repair.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
-  : earth-ground.
-  : earth-chassis.
- When replacing the part in below table, be sure to perform the related adjustment.
- All voltages are in V.
- Readings are taken with a 10 M digital multimeter.
- Readings are taken with a color-bar signal input.
- Voltage variations may be noted due to normal production tolerances.
- \* : Can not be measured.
- Circled numbers are waveform references.
-  : B + bus.
-  : B – bus.

**Note: The components identified by shading and mark  $\triangle$  are critical for safety. Replace only with part number specified.**

































**Note: Les composants identifiés par un tramé et une marque  $\triangle$  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.**

• Divided circuit diagram

Schematic diagrams of A, G, MS, TU and U boards are divided into several pieces. Information to where the line is to be connected is printed at the end of each line.  
For example, [ TO A1/12, A2/12\_1 ] means the line is connected to Ref. No. 1 of A (1/12) and A (2/12) schematic diagrams.



**Terminal name of semiconductors in silk screen printed circuit (※)**

|   | Device                 | Printed symbol  | Terminal name                        | Circuit   |
|---|------------------------|---|--------------------------------------|---|
| ① | Transistor             |    | Collector<br>Base<br>Emitter         |    |
| ② | Transistor             |    | Collector<br>Base<br>Emitter         |    |
| ③ | Diode                  |    | Cathode<br>Anode                     |    |
| ④ | Diode                  |    | Cathode<br>Anode (NC)                |    |
| ⑤ | Diode                  |    | Cathode<br>Anode (NC)                |    |
| ⑥ | Diode                  |    | Common<br>Anode<br>Cathode           |    |
| ⑦ | Diode                  |    | Common<br>Anode<br>Cathode           |    |
| ⑧ | Diode                  |    | Common<br>Anode<br>Anode             |    |
| ⑨ | Diode                  |    | Common<br>Anode<br>Anode             |    |
| ⑩ | Diode                  |    | Common<br>Cathode<br>Cathode         |    |
| ⑪ | Diode                  |    | Common<br>Cathode<br>Cathode         |   |
| ⑫ | Diode                  |    | Anode<br>Anode<br>Cathode<br>Cathode |  |
| ⑬ | Transistor (FET)       |  | Drain<br>Source<br>Gate              |  |
| ⑭ | Transistor (FET)       |  | Drain<br>Source<br>Gate              |  |
| ⑮ | Transistor (FET)       |  | Source<br>Drain<br>Gate              |  |
| ⑯ | Transistor             |  | Emitter<br>Collector<br>Base         |  |
| — | Discrete semiconductot |   |                                      |   |


(Chip semiconductors that are not actually used are included.)

Ver.1.6




4-4-1. DISPLAY UNIT (PDM-4200)

(1) Schematic Diagram of F Board

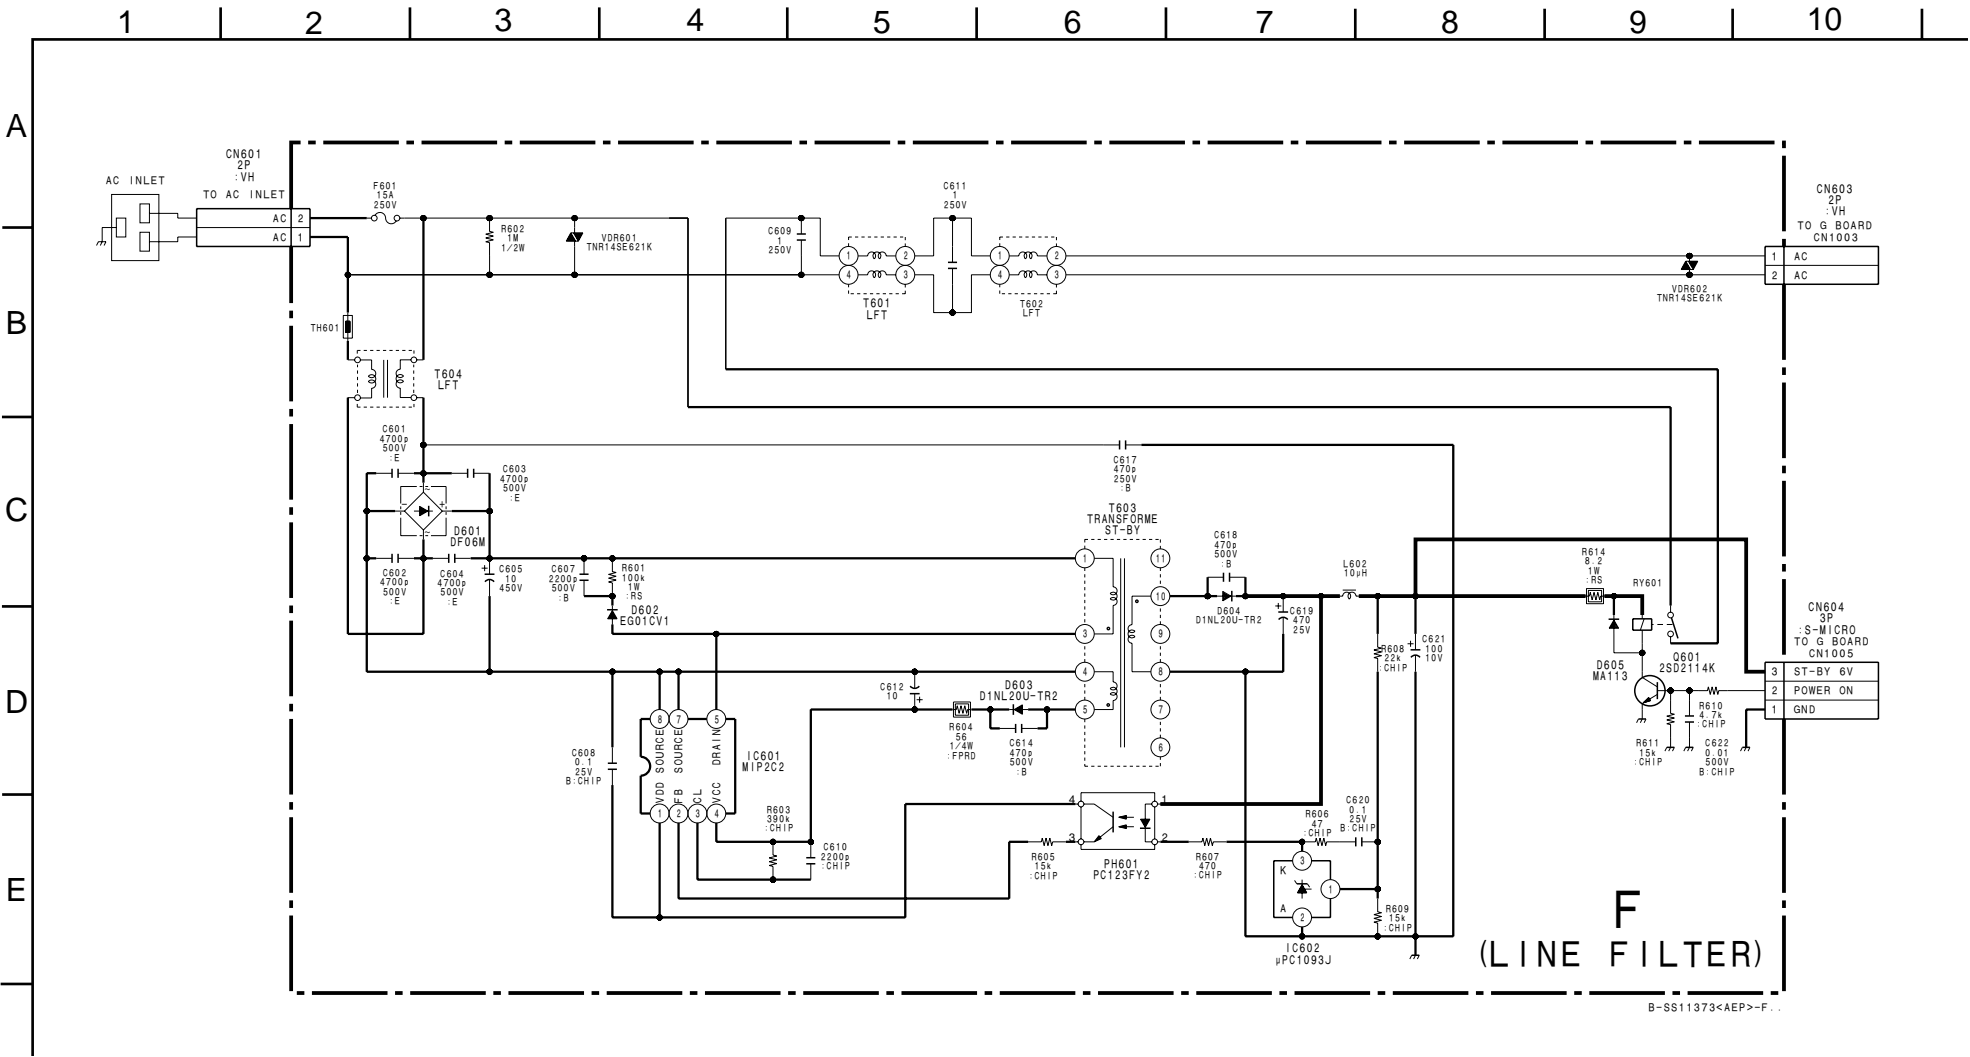

**F** [LINE FILTER]

— F BOARD —

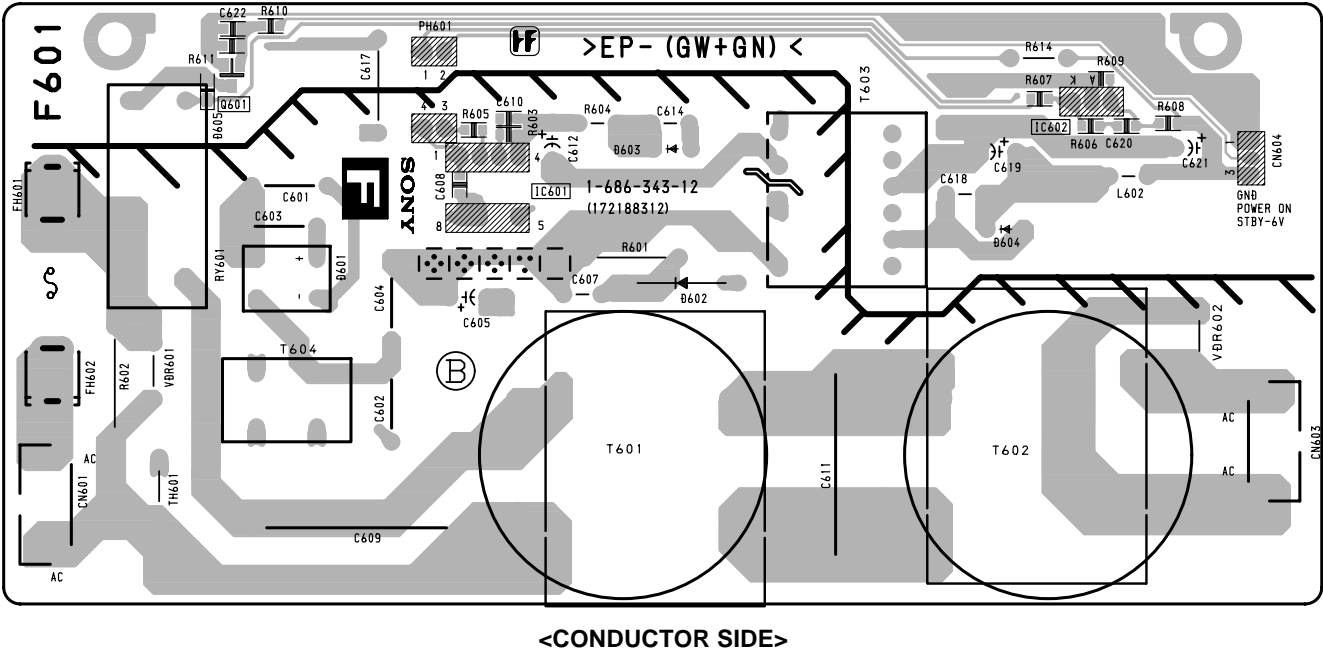


F BOARD  
Terminal name of semiconductors in  
silk screen printed circuit (\*)

| Ref.      | * |
|-----------|---|
| Q601      | ① |
| D601-D604 | - |
| D605      | ③ |


※: Refer to Terminal name of semiconductors  
in silk screen printed circuit (see page 4-18)

(2) Schematic Diagram of F2 Board

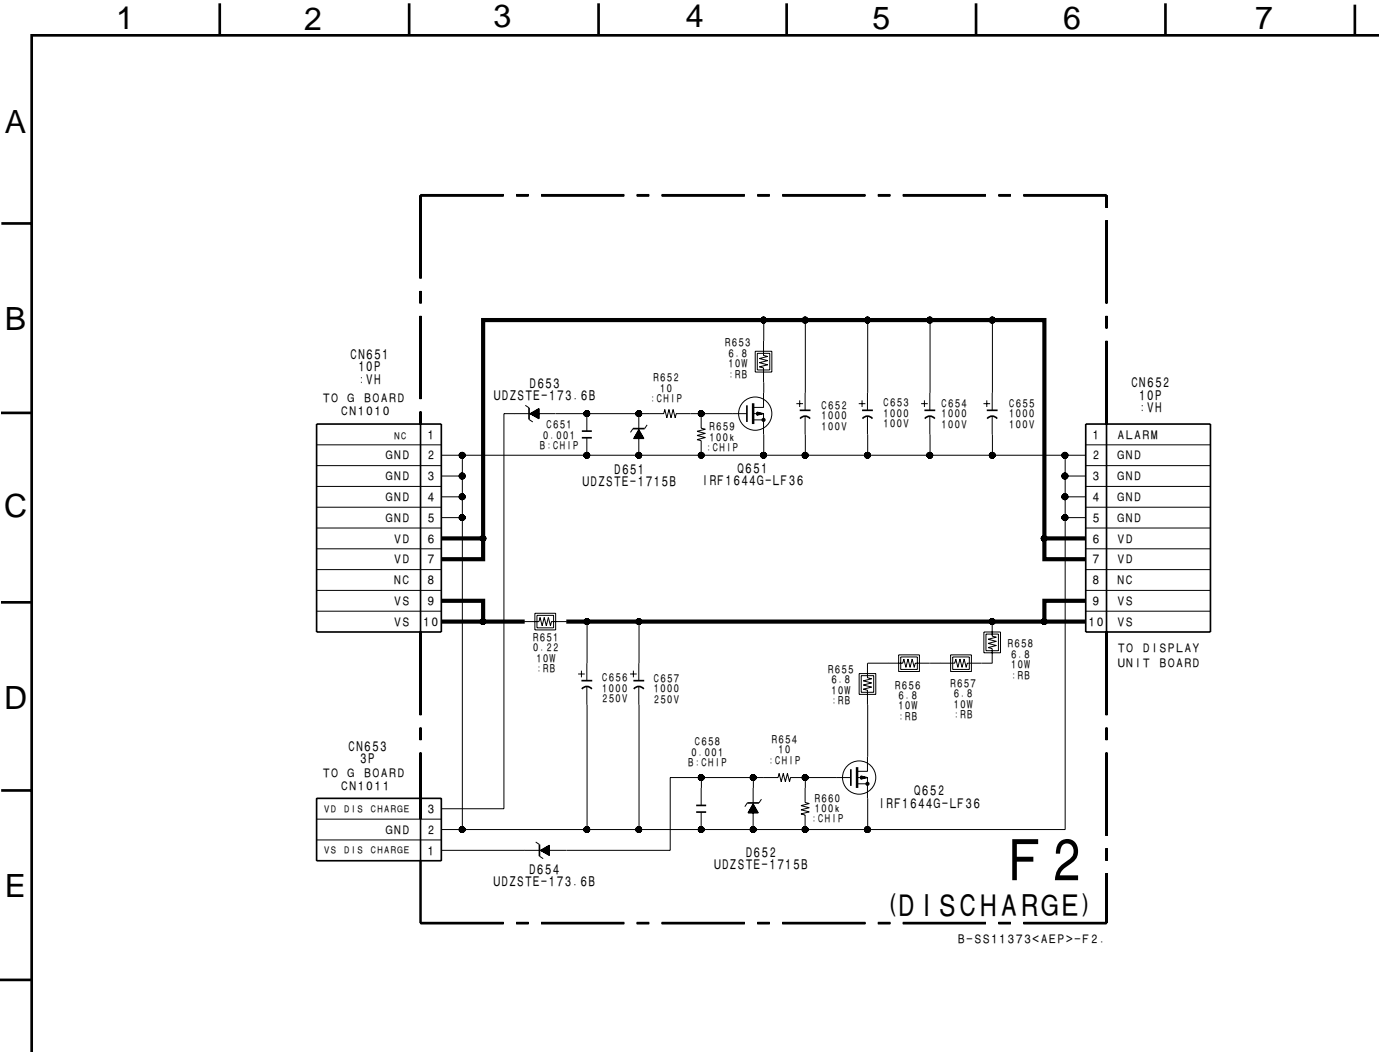

**F2** [DISCHARGE]

— F2 BOARD —

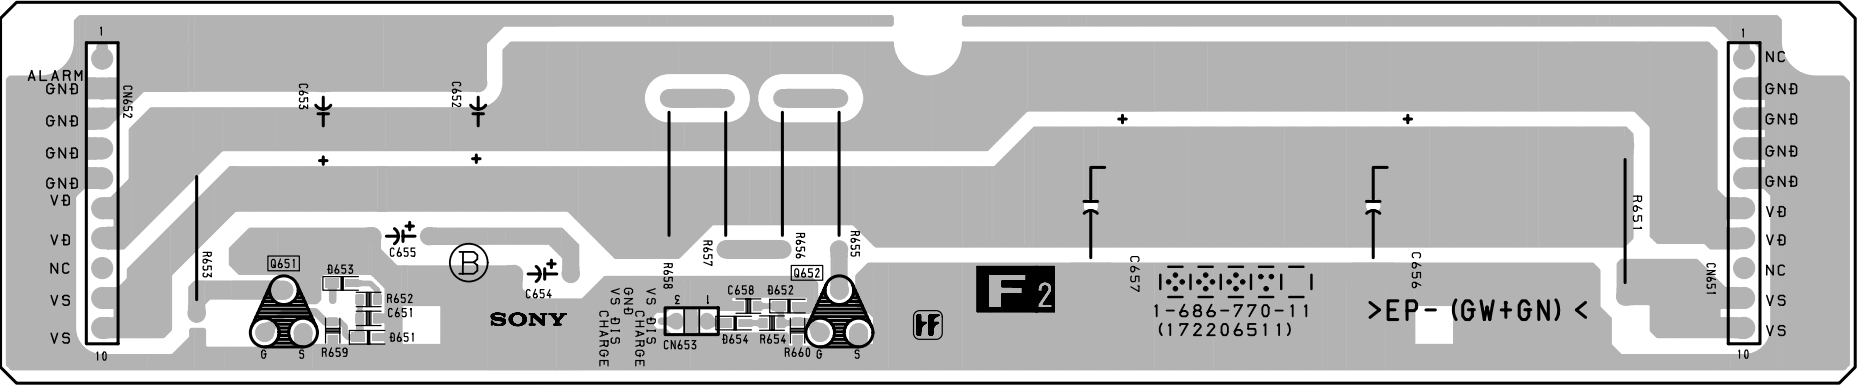


<CONDUCTOR SIDE>

**F2 BOARD**  
Terminal name of semiconductors in  
silk screen printed circuit (\*)

| Ref.       | * |
|------------|---|
| Q651, Q652 | - |
| D651-D654  | ③ |


※: Refer to Terminal name of semiconductors  
in silk screen printed circuit (see page 4-18)

### (3) Schematic Diagrams of G Board

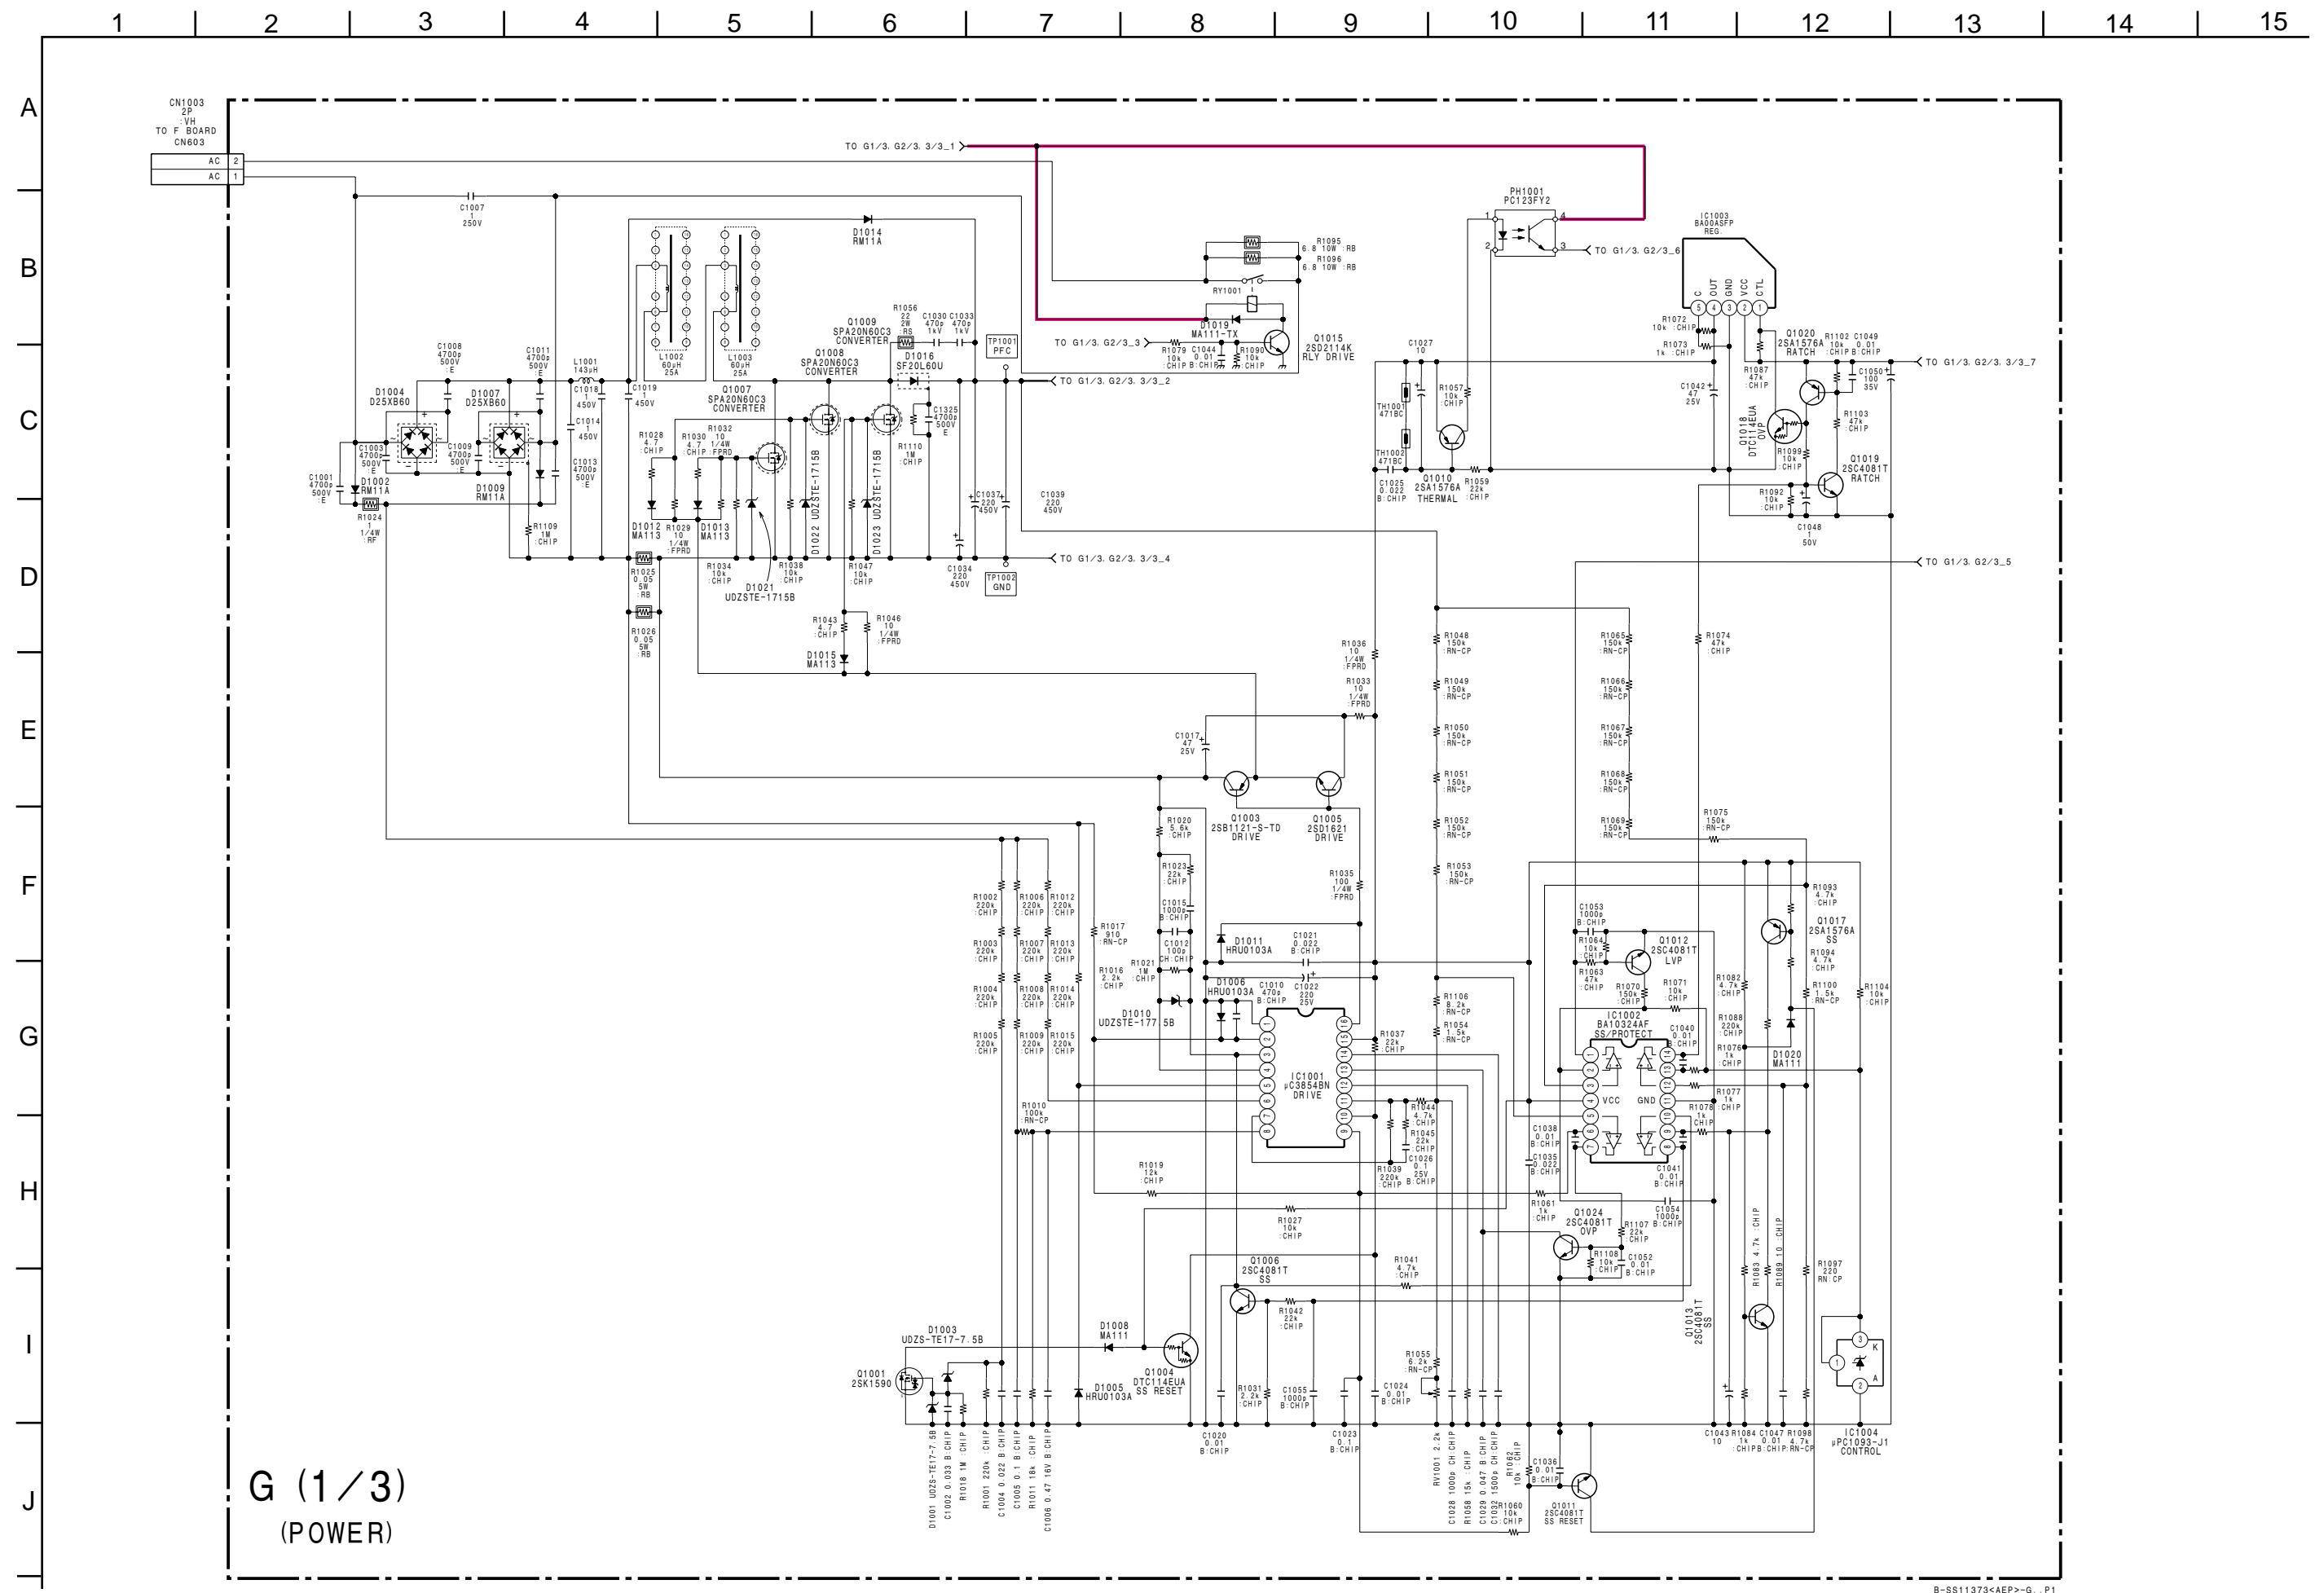




1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

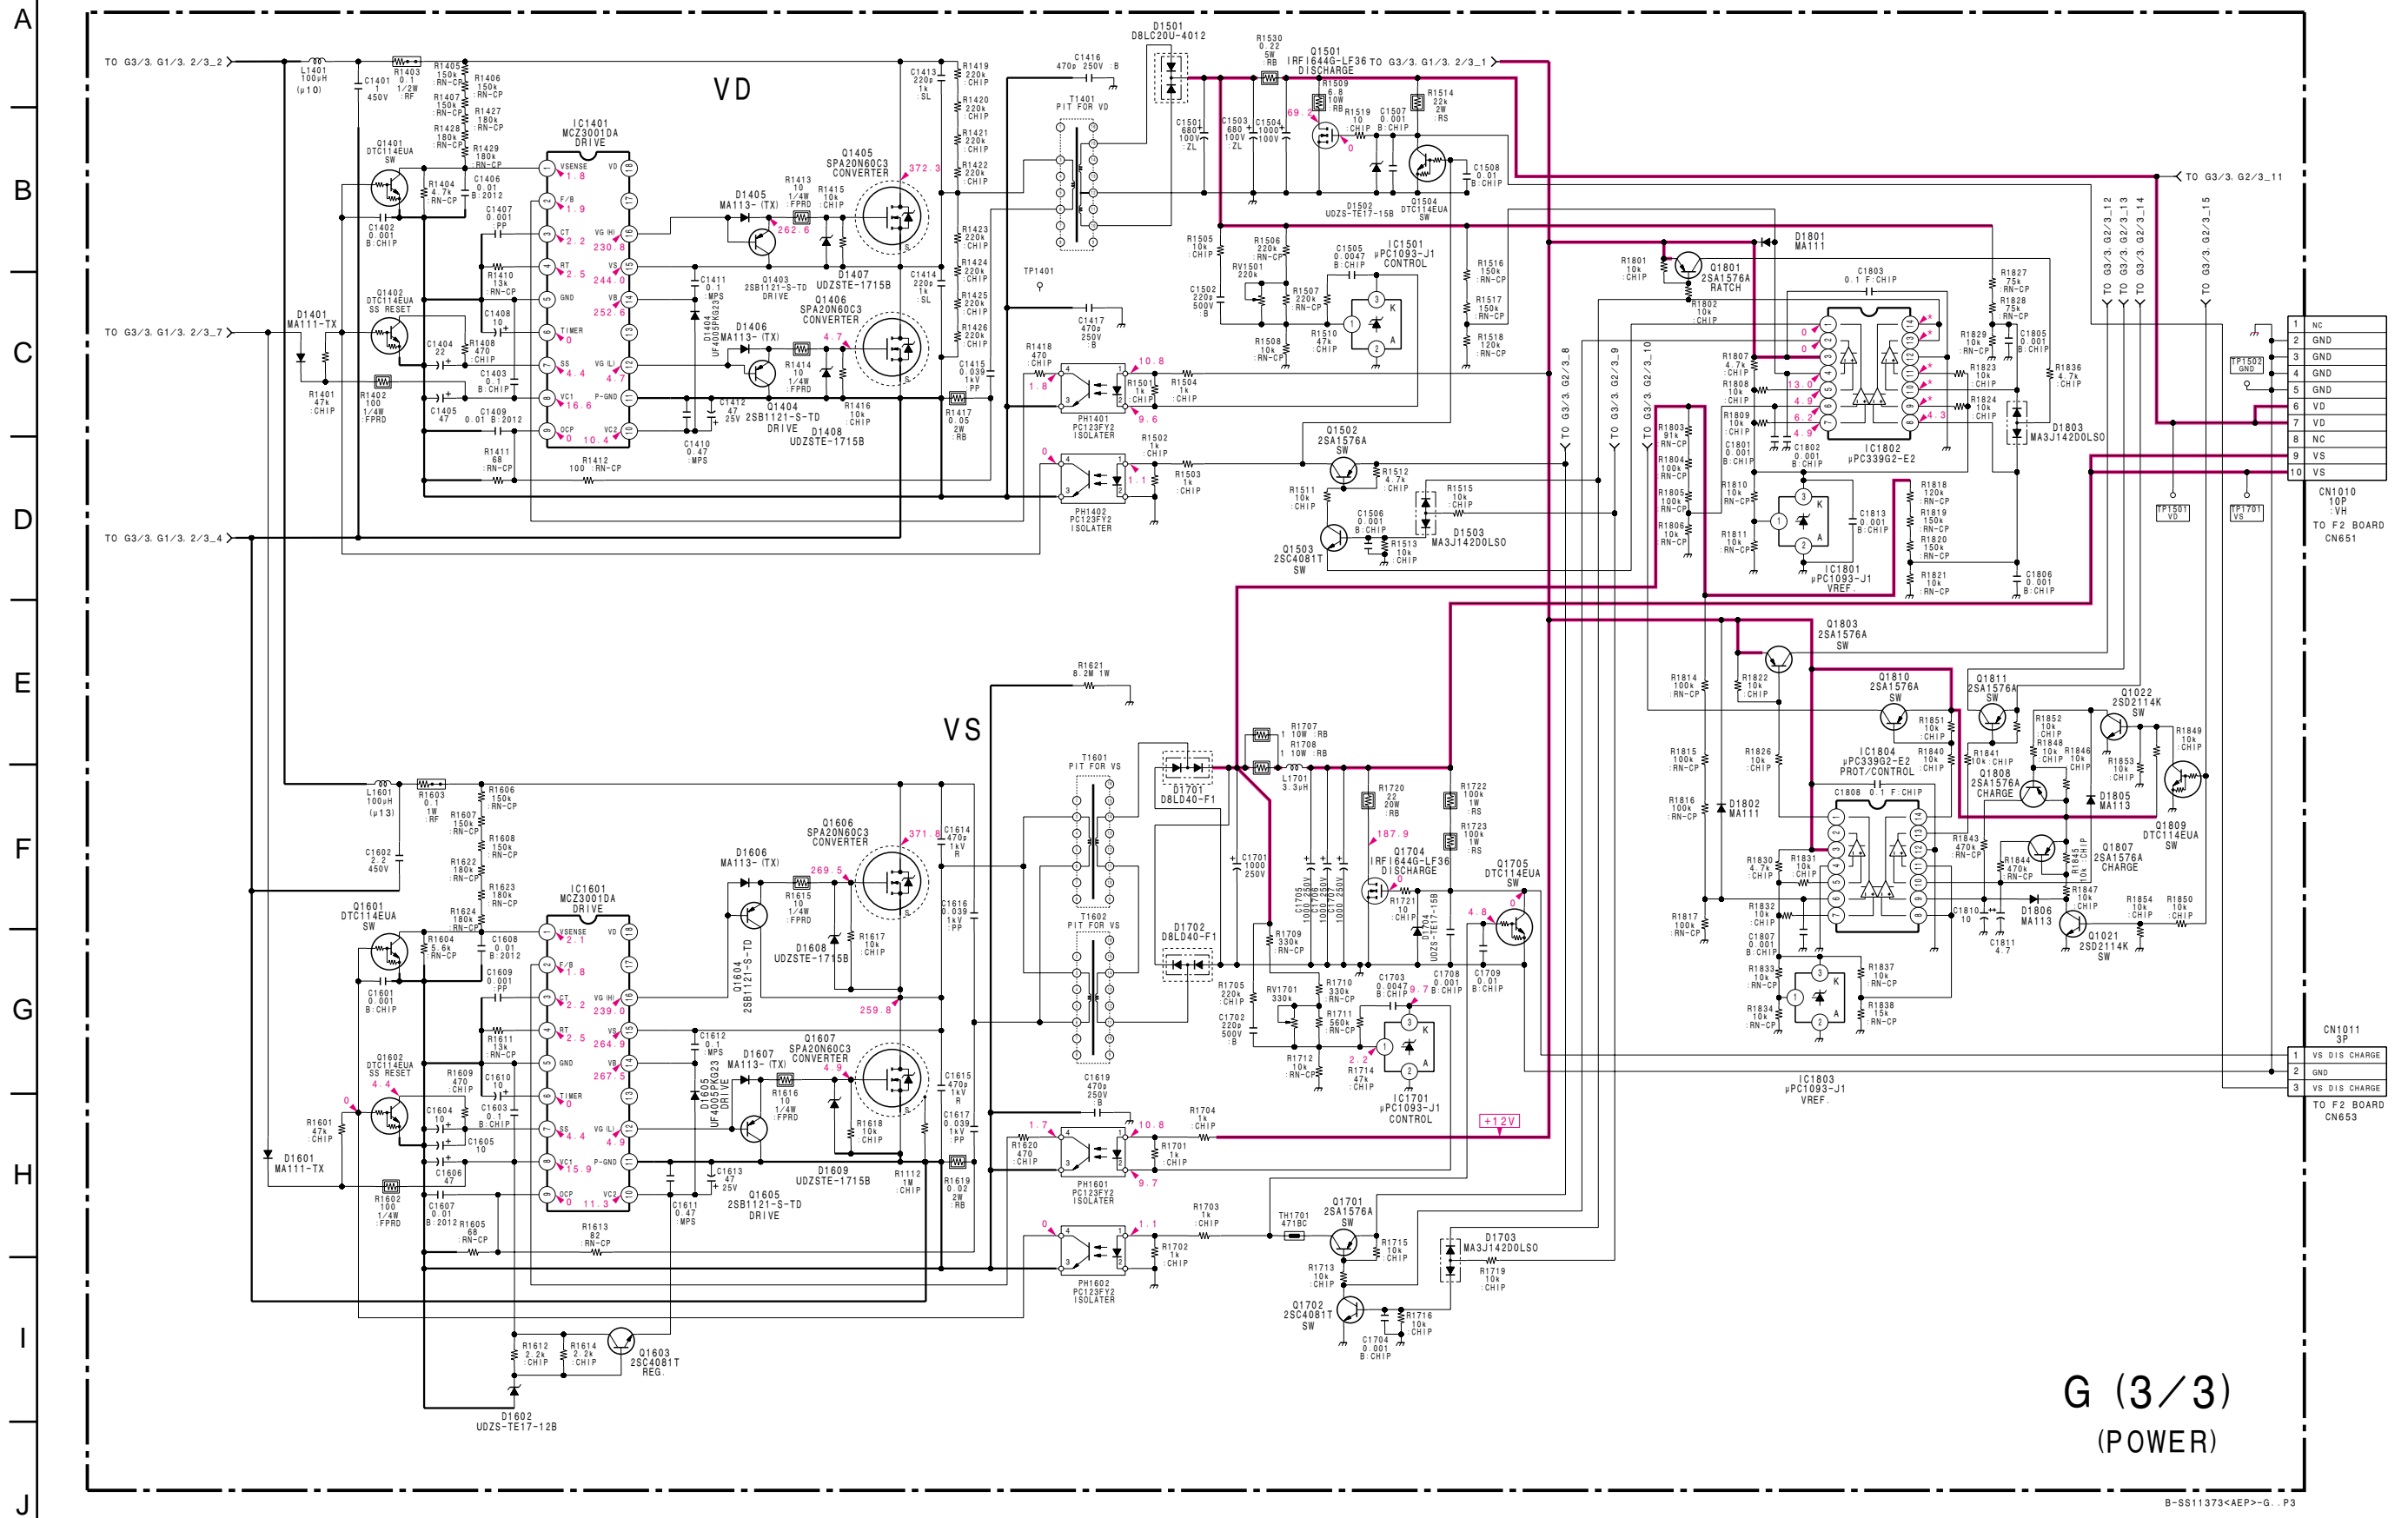

# G [POWER]

## — G BOARD —


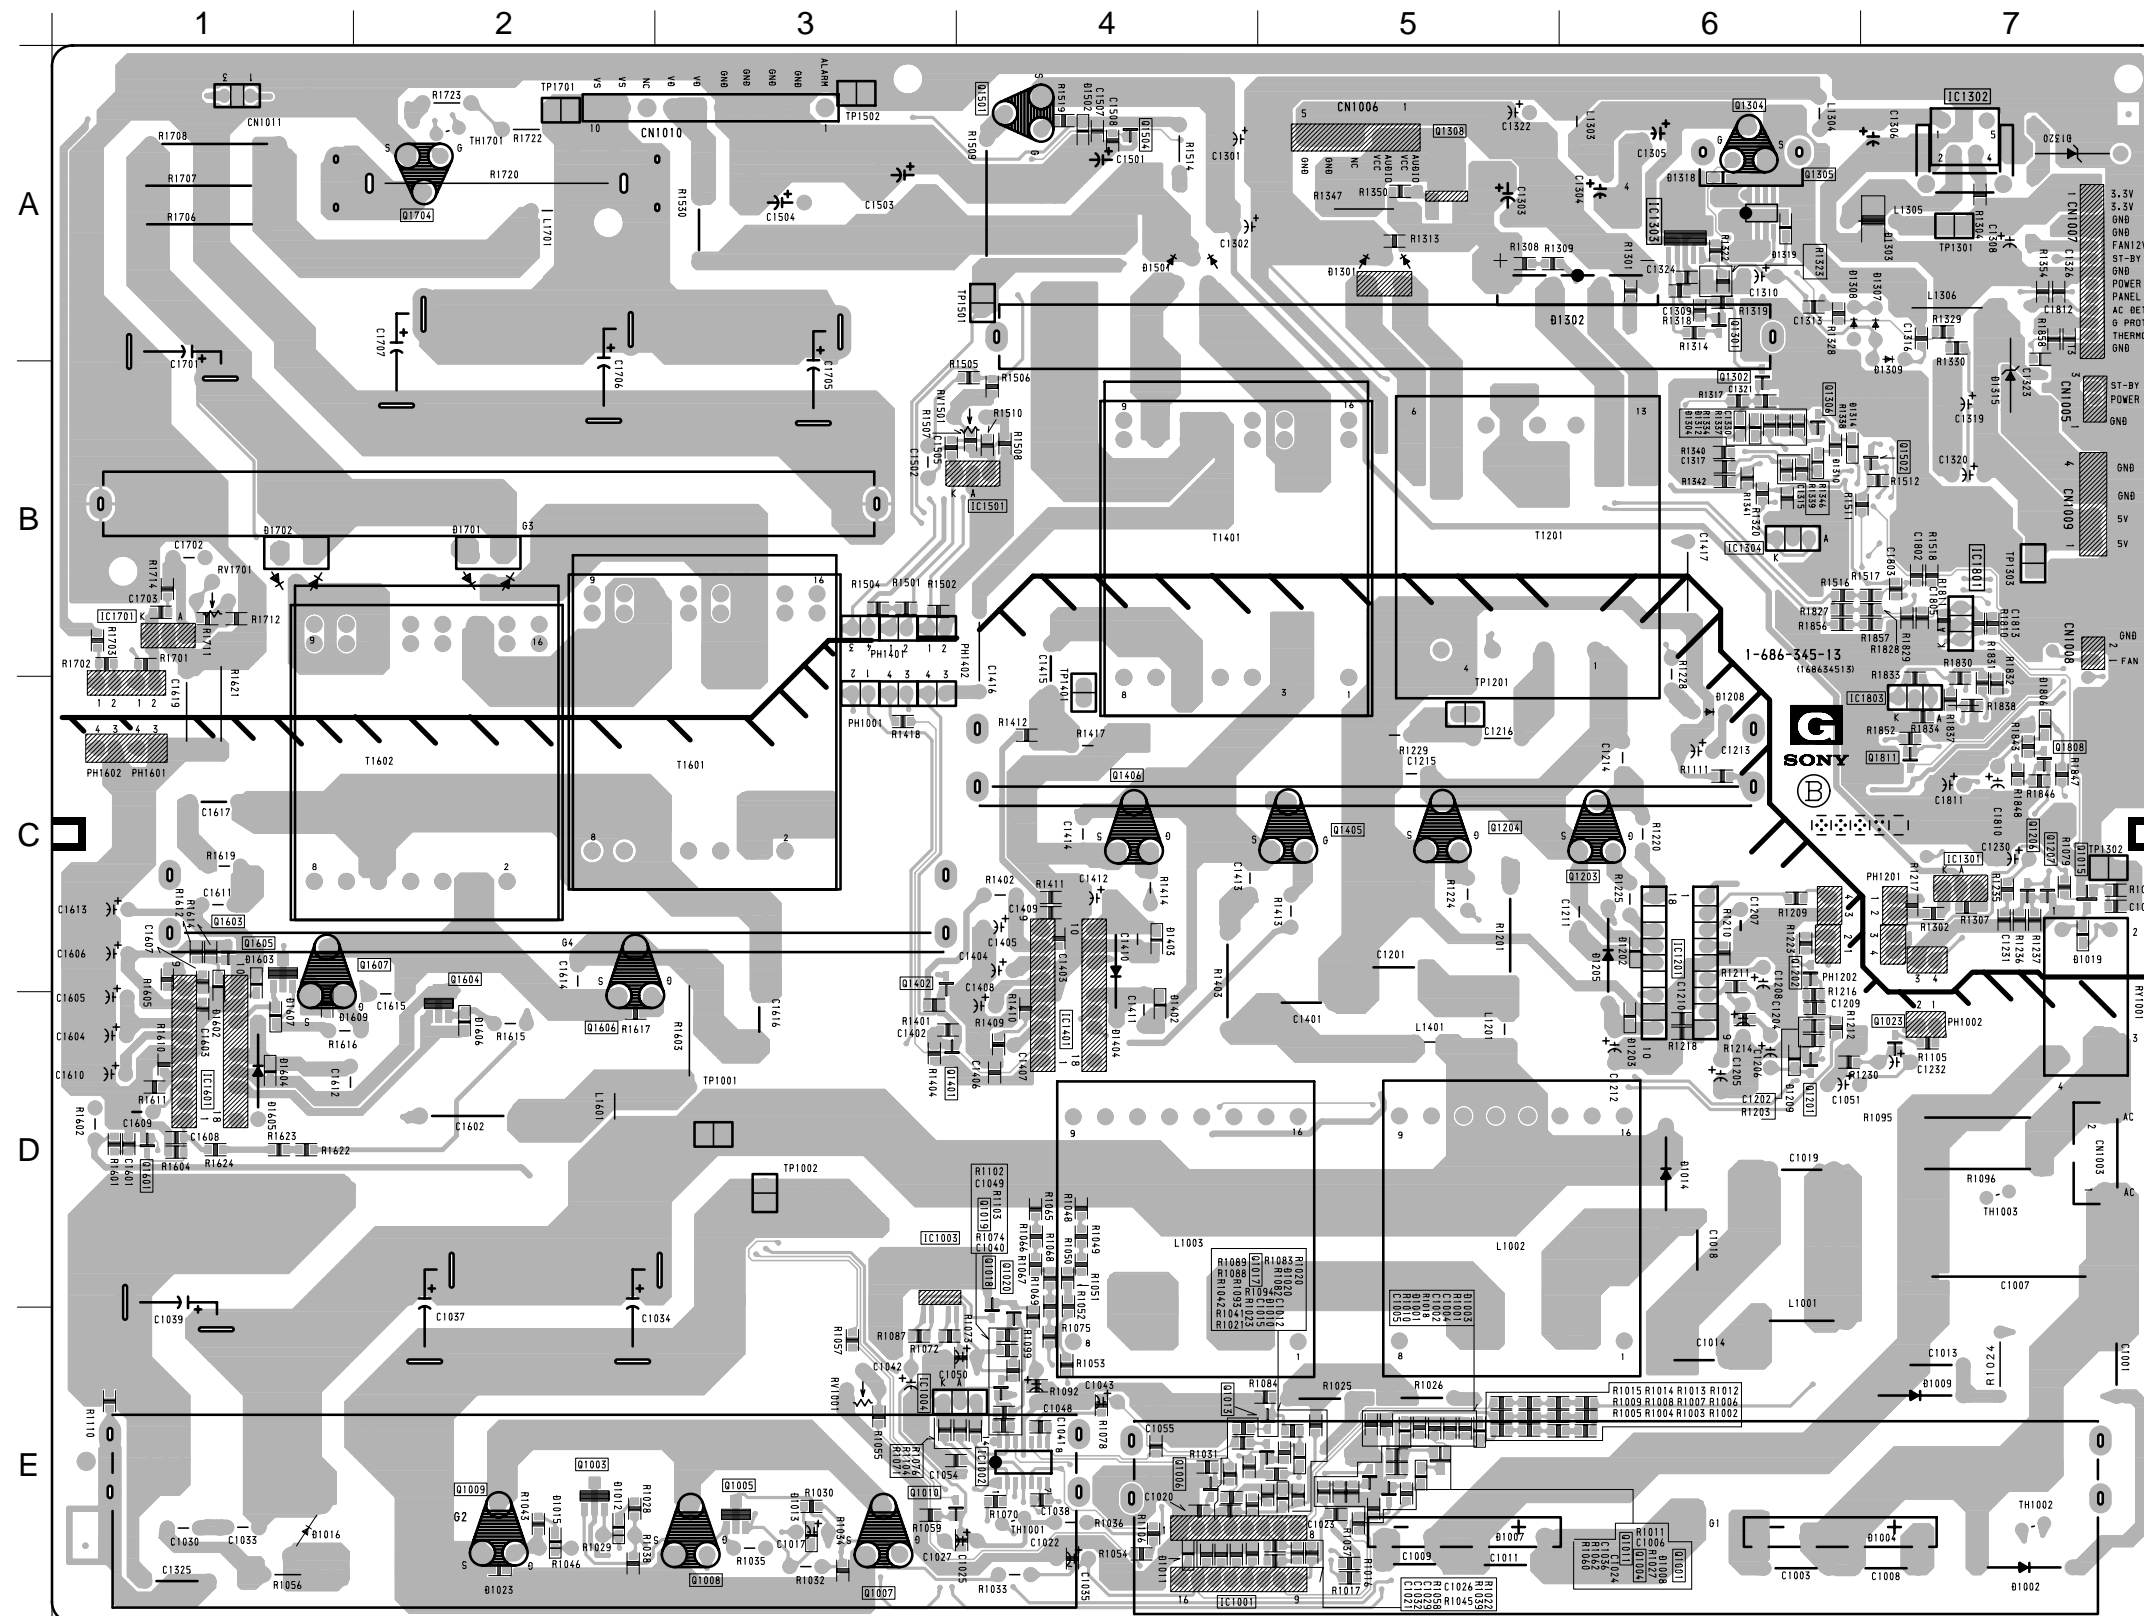


<CONDUCTOR SIDE>


## • G BOARD SEMICONDUCTOR LOCATION

| IC                                |                  |                  | Q1601 | D-1              | ①                |   |
|-----------------------------------|------------------|------------------|-------|------------------|------------------|---|
| (COMPONENT SIDE) (CONDUCTOR SIDE) | IC1001           | E-4              | Q1603 | C-1              | ①                |   |
|                                   | IC1002           | E-4              | Q1604 | D-2              | ②                |   |
|                                   | IC1003           | D-3              | Q1605 | C-1              | ②                |   |
|                                   | IC1004           | E-3              | Q1606 | D-2              | -                |   |
|                                   | IC1201           | C-6              | Q1607 | C-1              | -                |   |
|                                   | IC1301           | C-7              | Q1704 | A-2              | -                |   |
|                                   | IC1302           | A-7              | Q1808 | C-7              | -                |   |
|                                   | IC1303           | A-6              | Q1811 | C-7              | ①                |   |
|                                   | IC1304           | B-6              |       |                  |                  |   |
|                                   | IC1401           | D-4              |       |                  |                  |   |
|                                   | IC1501           | B-4              |       |                  |                  |   |
|                                   | IC1601           | D-1              |       |                  |                  |   |
|                                   | IC1701           | B-1              |       |                  |                  |   |
|                                   | IC1801           | B-7              |       |                  |                  |   |
|                                   | IC1803           | C-7              |       |                  |                  |   |
|                                   | TRANSISTOR       |                  |       | DIODE            |                  |   |
|                                   | (COMPONENT SIDE) | (CONDUCTOR SIDE) | *     | (COMPONENT SIDE) | (CONDUCTOR SIDE) | * |
|                                   | Q1001            | E-5              | ①     | D1001            | E-5              | ③ |
| Q1003                             | E-2              | ③                | D1002 | E-7              | -                |   |
| Q1004                             | E-5              | ①                | D1003 | E-5              | ③                |   |
| Q1005                             | E-3              | ②                | D1004 | E-7              | -                |   |
| Q1006                             | E-4              | ②                | D1007 | E-5              | -                |   |
| Q1007                             | E-3              | -                | D1008 | E-5              | ③                |   |
| Q1008                             | E-3              | -                | D1009 | E-7              | -                |   |
| Q1009                             | E-2              | -                | D1010 | E-5              | ③                |   |
| Q1010                             | E-3              | ①                | D1011 | E-4              | ③                |   |
| Q1011                             | E-5              | ①                | D1012 | E-2              | ③                |   |
| Q1013                             | E-5              | ①                | D1013 | E-3              | ③                |   |
| Q1015                             | C-7              | ①                | D1014 | D-6              | -                |   |
| Q1017                             | E-5              | ①                | D1015 | E-2              | ③                |   |
| Q1018                             | E-4              | ①                | D1016 | E-1              | -                |   |
| Q1019                             | E-4              | ①                | D1019 | C-7              | ③                |   |
| Q1020                             | E-4              | ①                | D1020 | E-5              | ③                |   |
| Q1023                             | D-7              | ①                | D1023 | E-2              | ③                |   |
| Q1201                             | D-6              | ①                | D1205 | C-6              | -                |   |
| Q1202                             | C-6              | ①                | D1208 | C-6              | -                |   |
| Q1203                             | C-6              | -                | D1209 | D-6              | ③                |   |
| Q1204                             | C-5              | -                | D1301 | A-5              | -                |   |
| Q1206                             | C-7              | ①                | D1302 | A-5              | -                |   |
| Q1207                             | C-7              | ①                | D1303 | A-7              | ③                |   |
| Q1301                             | A-6              | ②                | D1304 | B-6              | ③                |   |
| Q1302                             | B-6              | ②                | D1307 | A-7              | -                |   |
| Q1304                             | A-6              | -                | D1308 | A-6              | -                |   |
| Q1305                             | A-6              | -                | D1309 | B-7              | -                |   |
| Q1306                             | B-6              | ②                | D1310 | B-6              | ③                |   |
| Q1308                             | A-5              | -                | D1312 | B-6              | ③                |   |
| Q1401                             | D-3              | ①                | D1314 | B-6              | ③                |   |
| Q1402                             | C-3              | ①                | D1315 | B-7              | -                |   |
| Q1405                             | C-5              | -                | D1318 | A-6              | ③                |   |
| Q1406                             | C-4              | -                | D1319 | A-6              | ③                |   |
| Q1501                             | A-4              | -                | D1320 | A-7              | -                |   |
| Q1502                             | B-7              | ②                | D1404 | D-4              | -                |   |
| Q1504                             | A-4              | ②                | D1501 | A-4              | -                |   |
|                                   |                  |                  | D1502 | A-4              | ③                |   |
|                                   |                  |                  | D1601 | C-1              | ③                |   |
|                                   |                  |                  | D1602 | C-1              | ③                |   |
|                                   |                  |                  | D1605 | D-1              | -                |   |
|                                   |                  |                  | D1606 | D-2              | ③                |   |
|                                   |                  |                  | D1607 | D-1              | ③                |   |
|                                   |                  |                  | D1609 | D-1              | ③                |   |
|                                   |                  |                  | D1701 | B-2              | -                |   |
|                                   |                  |                  | D1702 | B-1              | -                |   |
|                                   |                  |                  | D1806 | C-7              | ③                |   |

(4) Schematic Diagram of K Board

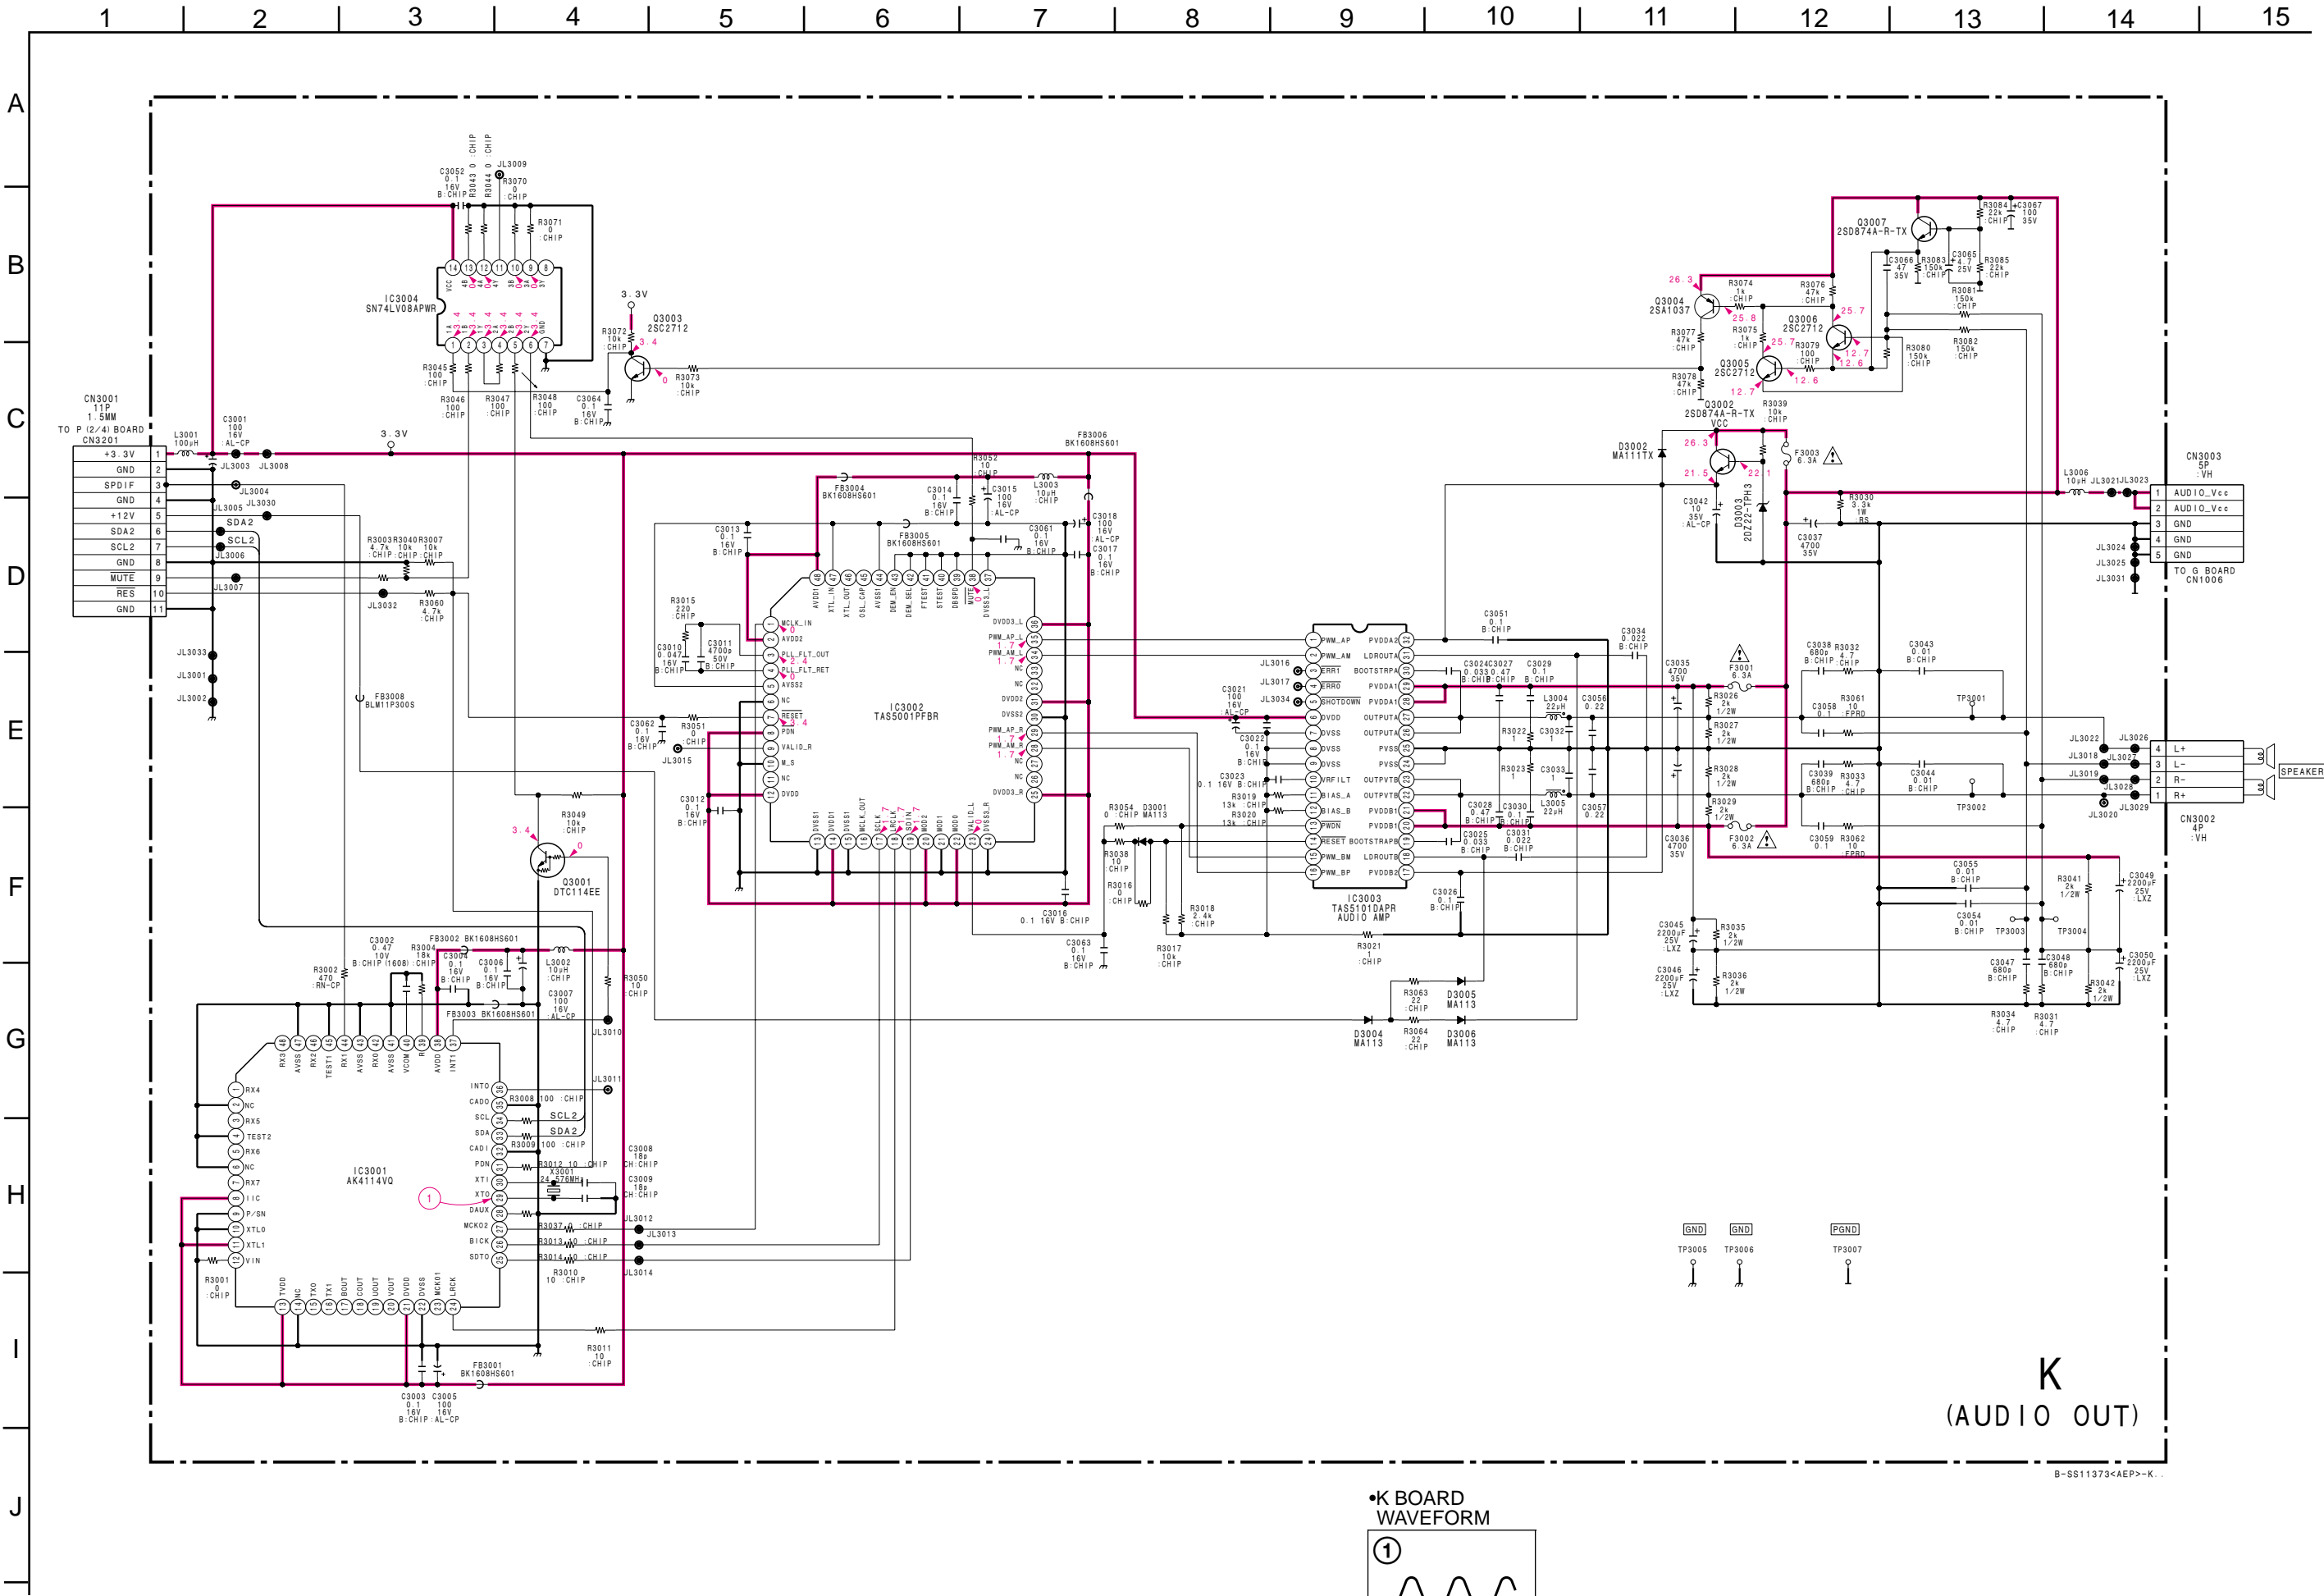

B-SS11373<AEP>-K..

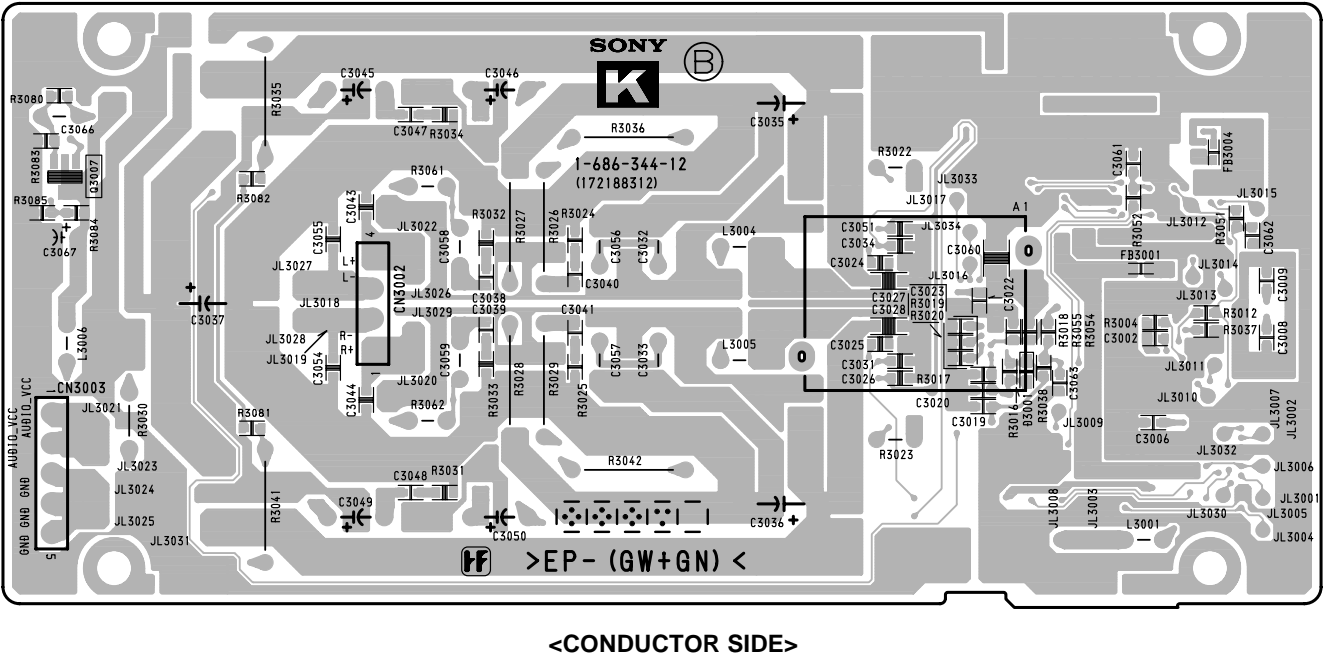


K BOARD  
Terminal name of semiconductors in  
silk screen printed circuit (\*)

| Ref.  | * |
|-------|---|
| D3001 | ③ |
| Q3007 | ⑩ |

※: Refer to Terminal name of semiconductors  
in silk screen printed circuit (see page 4-18)




(5) Schematic Diagrams of P Board

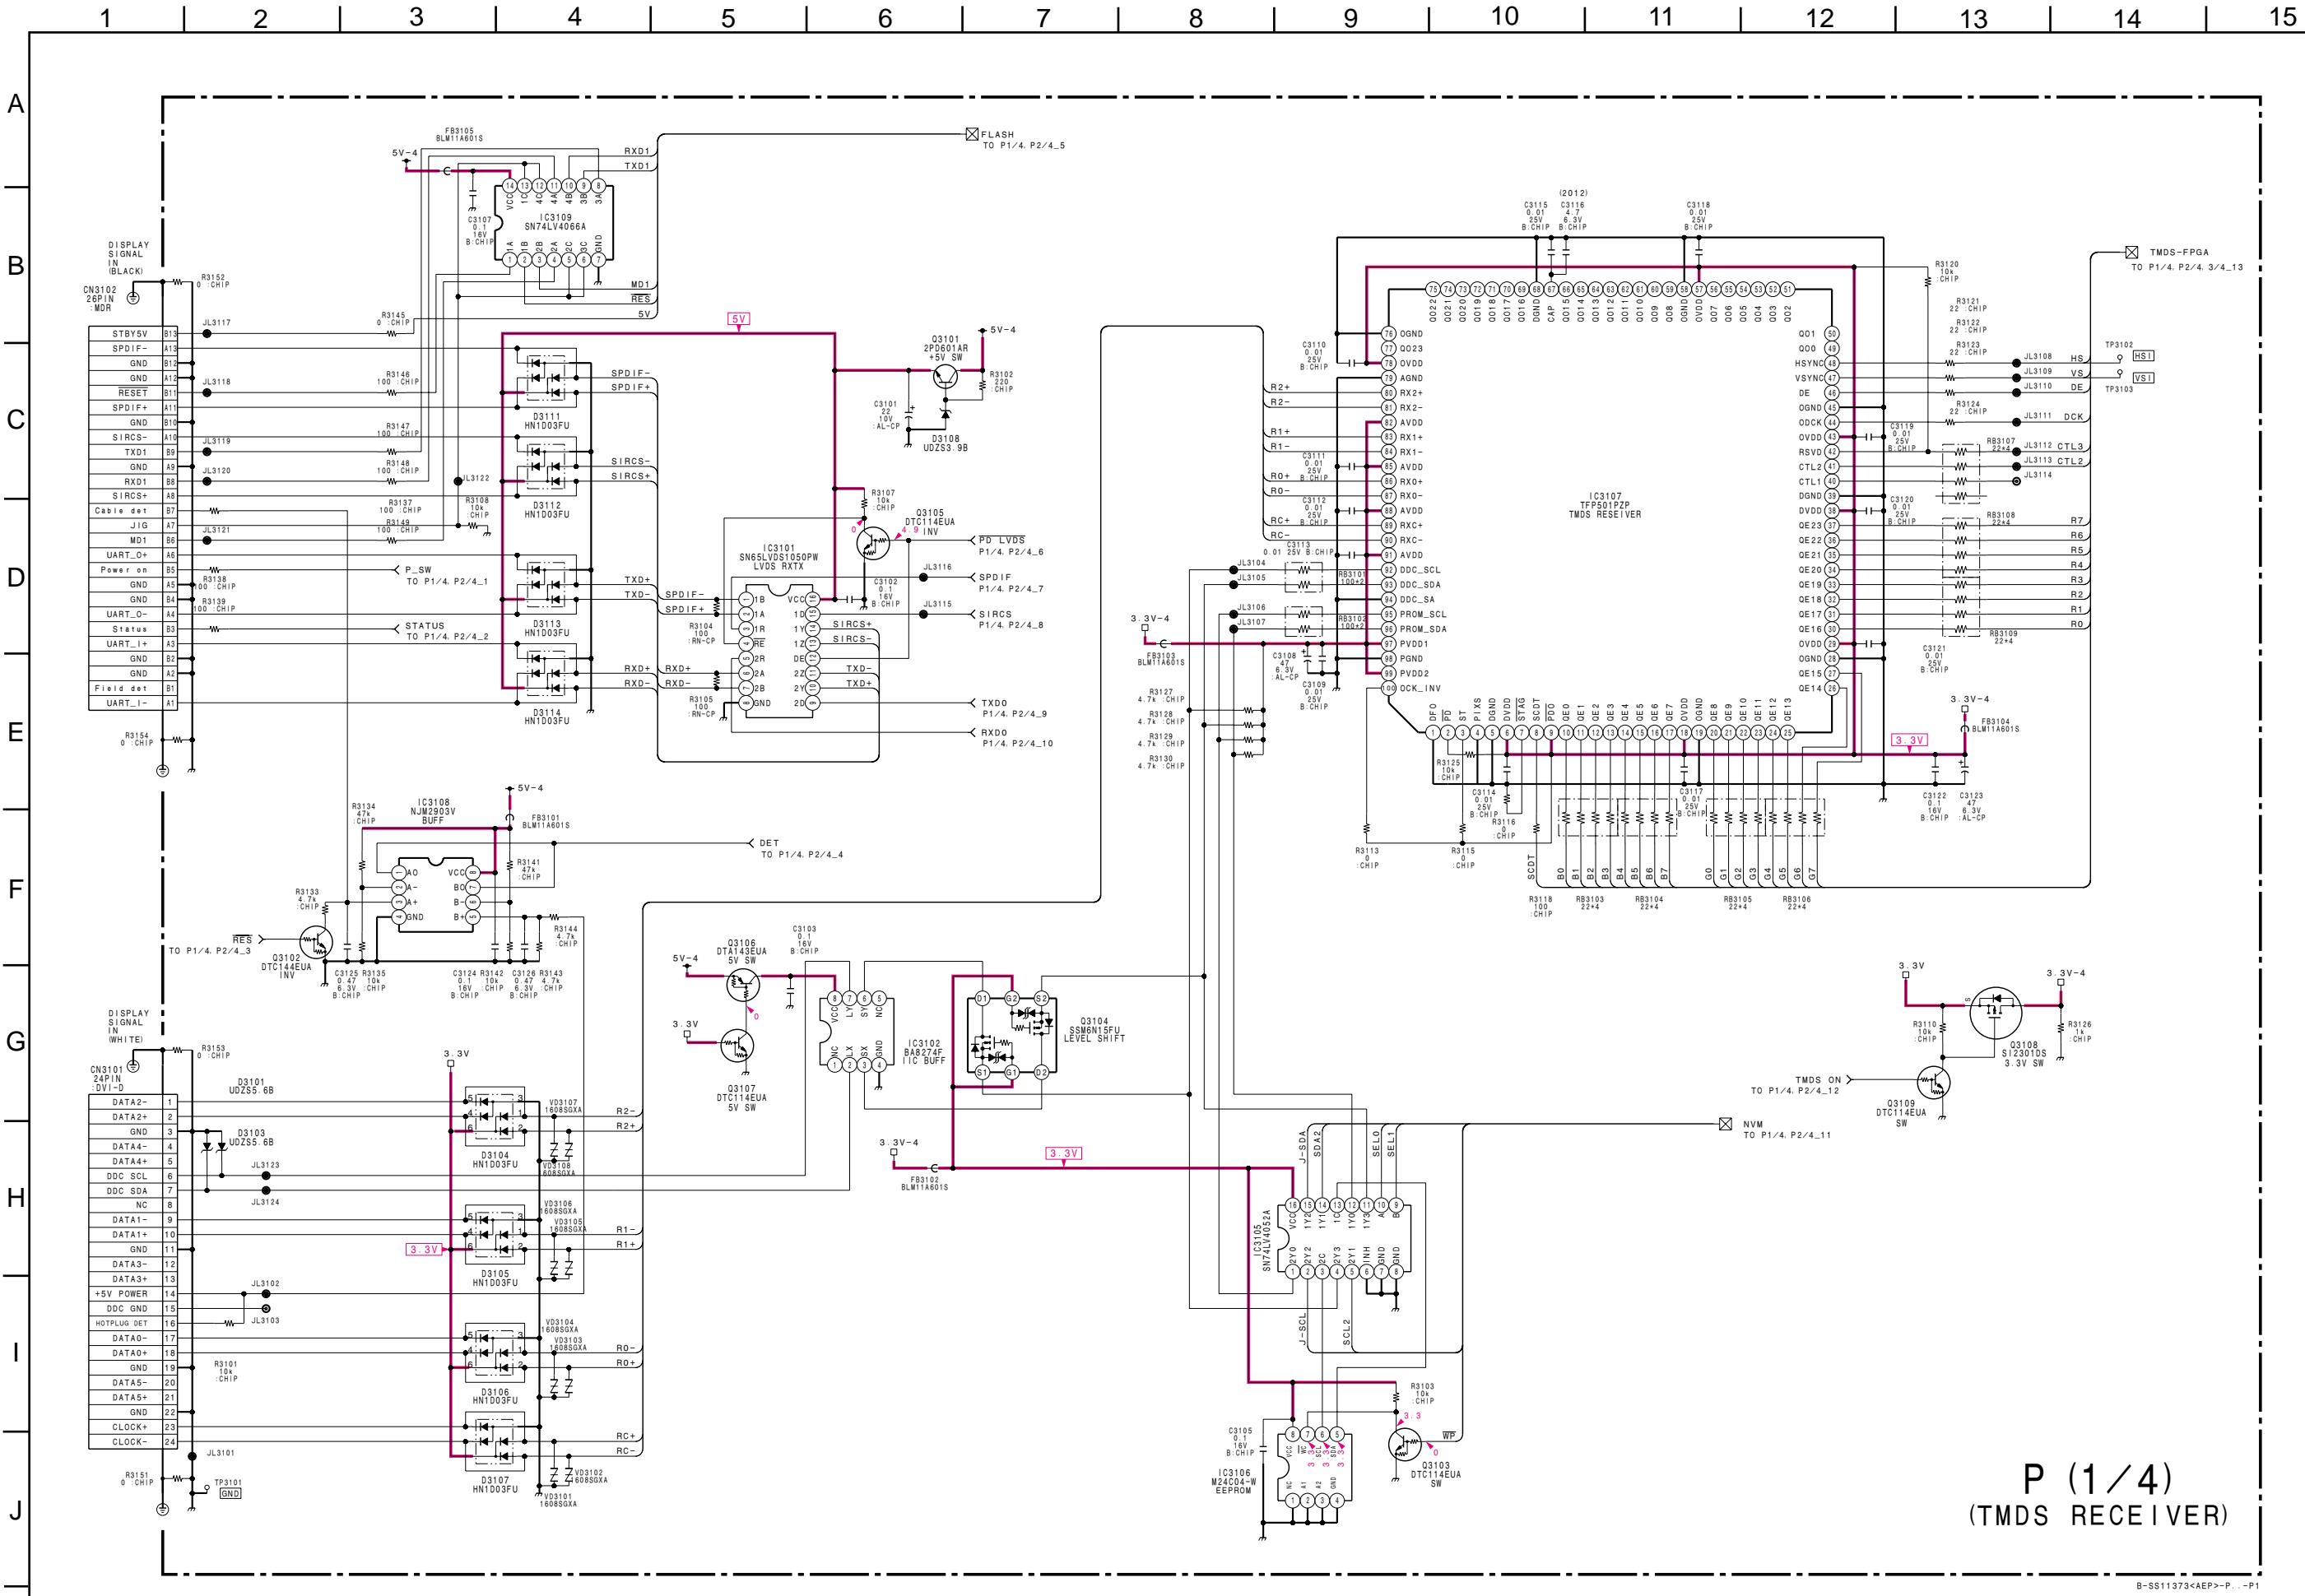


P (1/4)  
(TMDS RECEIVER)








— P BOARD —

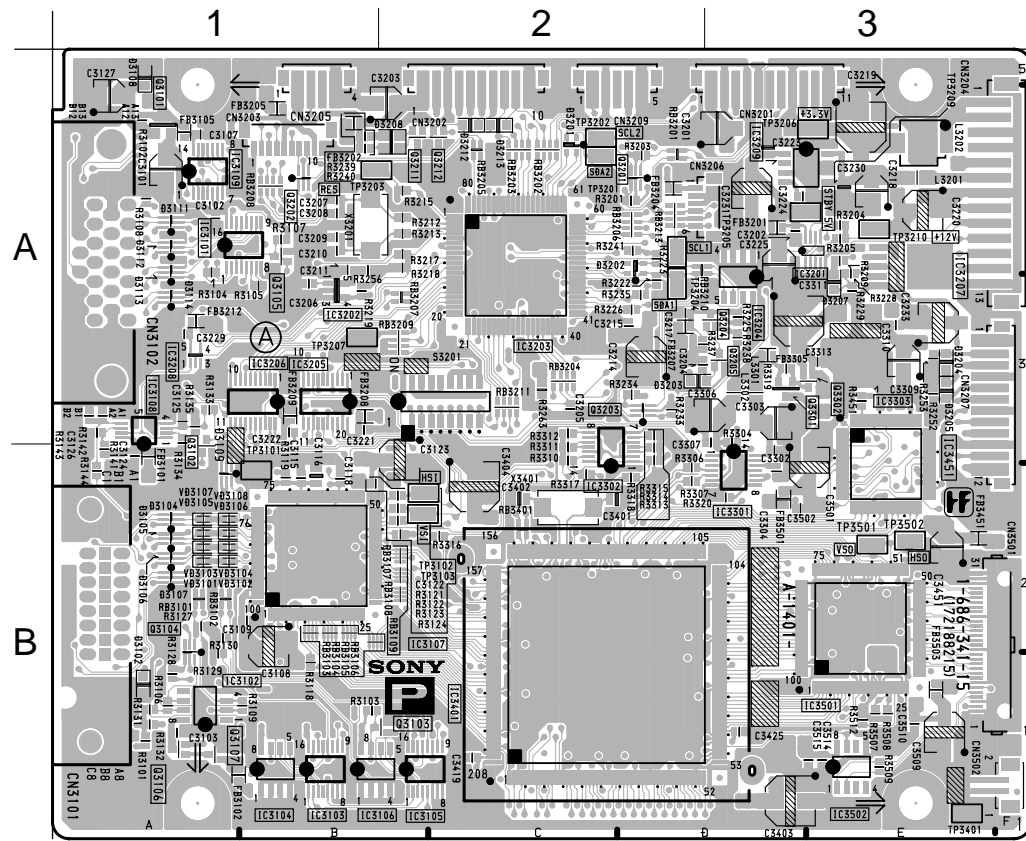

<COMPONENT SIDE>

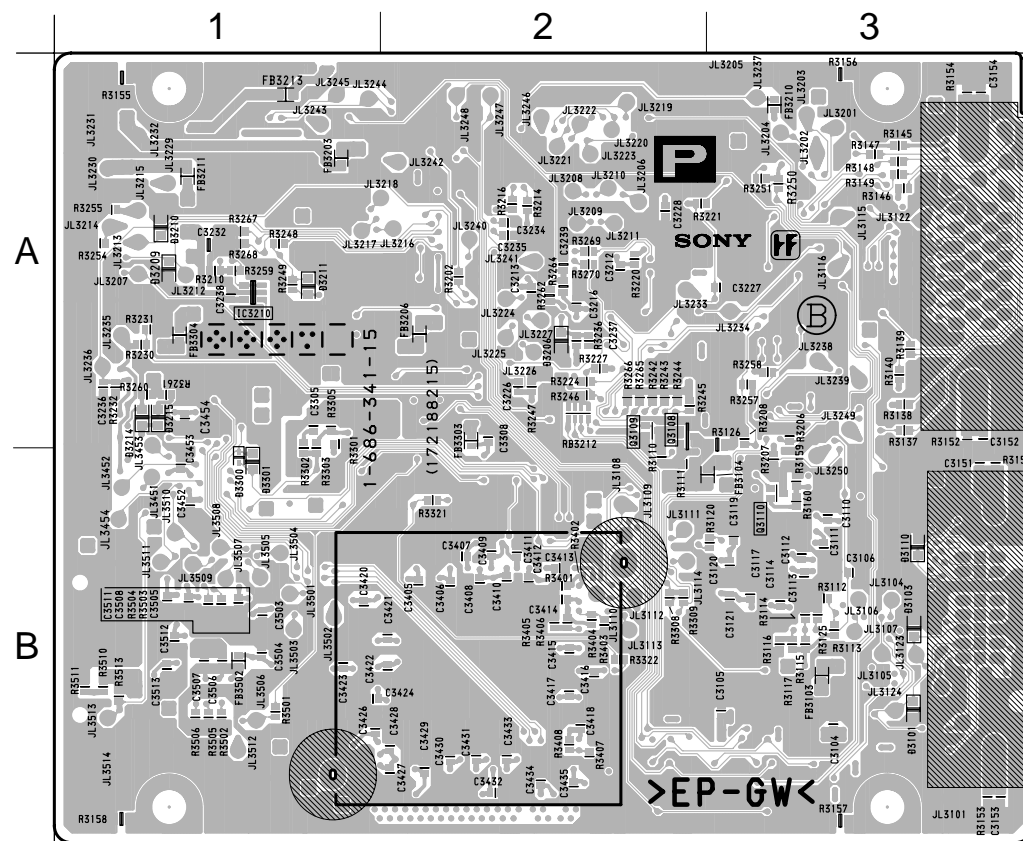


<CONDUCTOR SIDE>

• P BOARD SEMICONDUCTOR LOCATION

| IC               |                  | TRANSISTOR       |                    | D3105 | B-1 | - |
|------------------|------------------|------------------|--------------------|-------|-----|---|
| (COMPONENT SIDE) | (CONDUCTOR SIDE) | (COMPONENT SIDE) | (CONDUCTOR SIDE) * |       |     |   |
| IC3101           | A-1              | Q3101            | A-1                | D3106 | B-1 | - |
| IC3102           | B-1              | Q3102            | B-1                | D3107 | B-1 | - |
| IC3105           | B-2              | Q3103            | B-2                | D3108 | A-1 | ③ |
| IC3106           | B-1              | Q3104            | B-1                | D3111 | A-1 | - |
| IC3107           | B-1              | Q3105            | A-1                | D3112 | A-1 | - |
| IC3108           | A-1              | Q3106            | B-1                | D3113 | A-1 | - |
| IC3109           | A-1              | Q3107            | B-1                | D3114 | A-1 | - |
| IC3201           | A-3              | Q3108            | A-2                | D3201 | A-2 | - |
| IC3202           | A-1              | Q3109            | A-2                | D3202 | A-2 | - |
| IC3203           | A-2              | Q3201            | A-2                | D3203 | A-2 | ③ |
| IC3204           | A-3              | Q3203            | A-2                | D3204 | A-3 | ③ |
| IC3205           | A-1              | Q3204            | A-3                | D3205 | A-3 | ③ |
| IC3206           | A-1              | Q3205            | A-3                | D3206 | A-2 | ③ |
| IC3207           | A-3              | Q3301            | A-3                | D3207 | A-3 | ③ |
| IC3208           | A-1              | Q3302            | A-3                | D3209 | A-1 | ③ |
| IC3209           | A-3              |                  |                    | D3210 | A-1 | ③ |
| IC3210           | A-1              |                  |                    | D3211 | A-1 | ③ |
| IC3301           | B-3              | DIODE            |                    | D3214 | A-1 | ③ |
| IC3302           | B-2              | (COMPONENT SIDE) | (CONDUCTOR SIDE) * | D3215 | A-1 | ③ |
| IC3303           | A-3              | D3101            | B-3                | D3300 | B-1 | ③ |
| IC3401           | B-2              | D3103            | B-3                |       |     |   |
| IC3451           | B-3              | D3104            | B-1                |       |     |   |
| IC3501           | B-3              |                  |                    |       |     |   |
| IC3502           | B-3              |                  |                    |       |     |   |


※: Refer to Terminal name of semiconductors  
in silk screen printed circuit (see page 4-18)

(6) Schematic Diagrams of R1 and R2 Boards

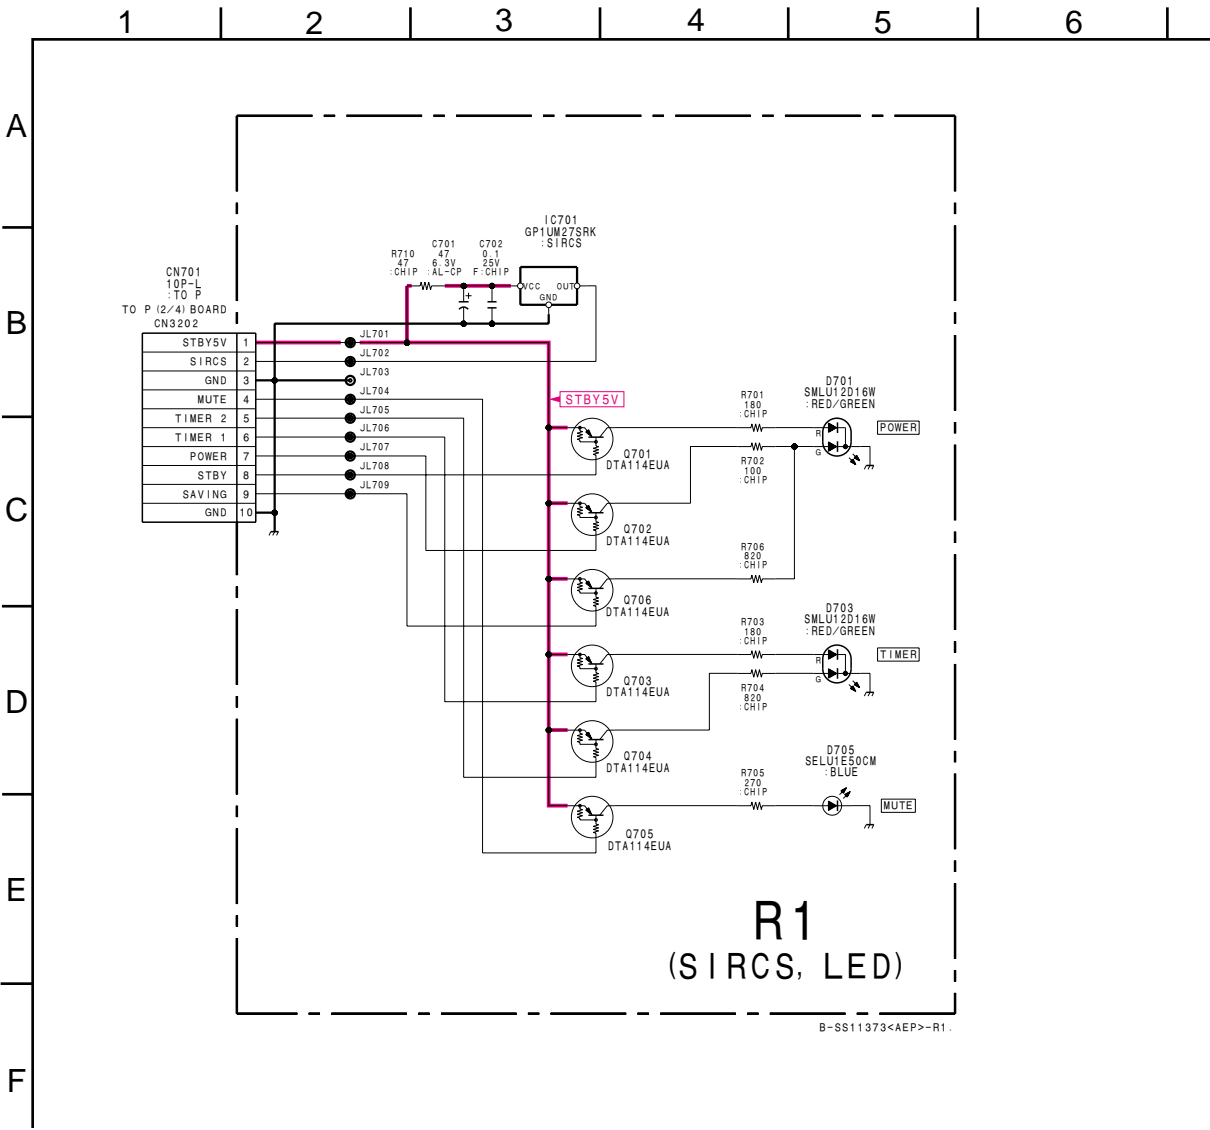

**R1** [SIRCS, LED]

— R1 BOARD —




<CONDUCTOR SIDE>

**R1 BOARD**  
Terminal name of semiconductors in  
silk screen printed circuit (\*)


| Ref.             | * |
|------------------|---|
| Q701-Q706        | ① |
| D701, D703, D705 | - |

※: Refer to Terminal name of semiconductors  
in silk screen printed circuit (see page 4-18)

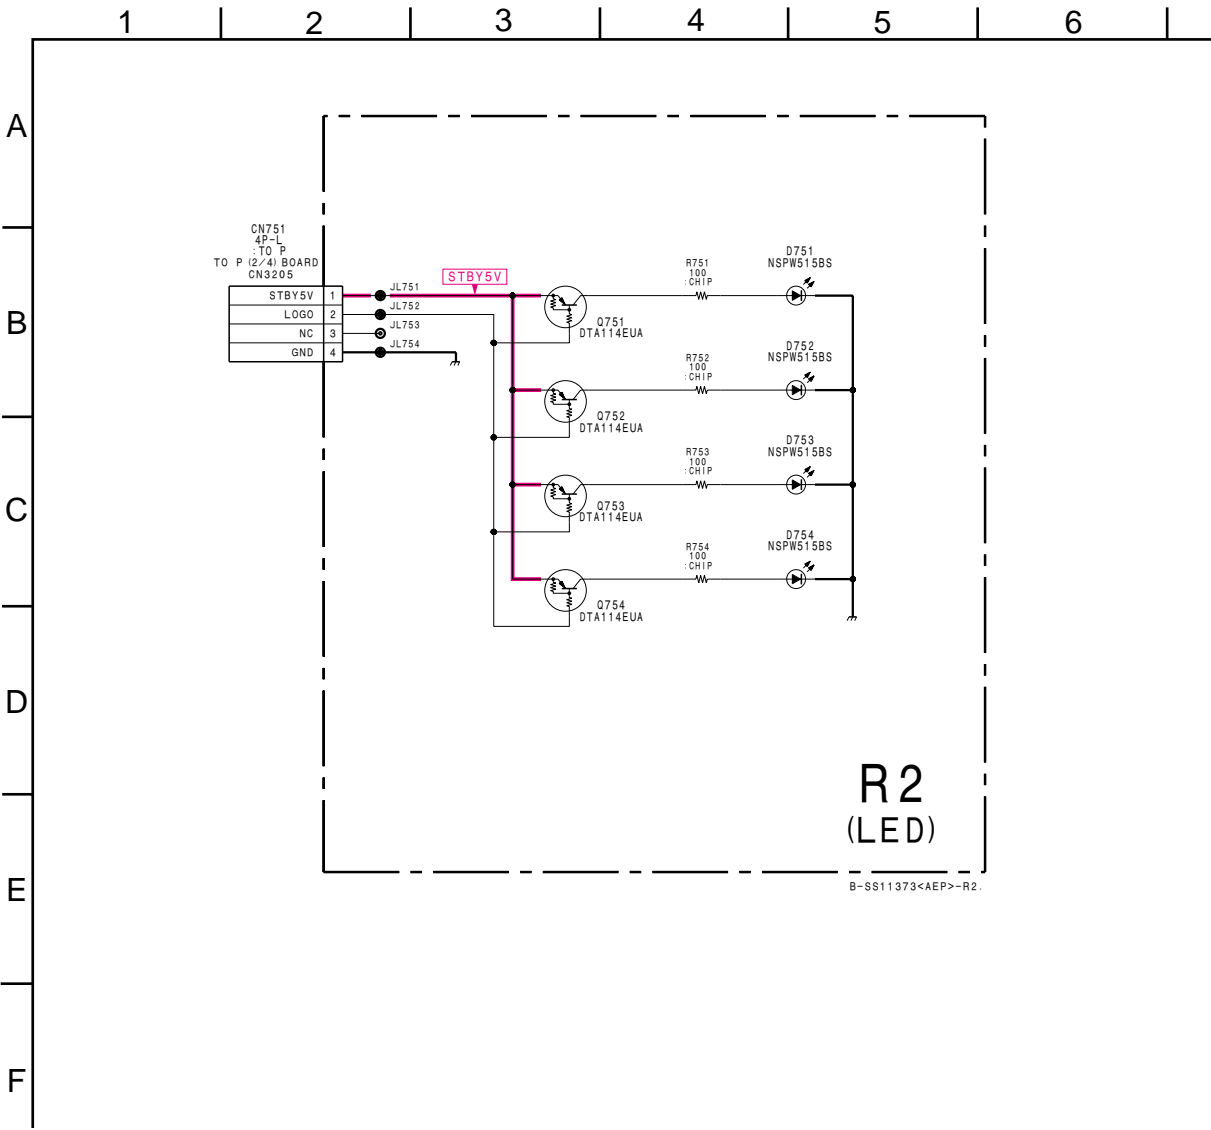

**R2** [LED]

— R2 BOARD —



<CONDUCTOR SIDE>


**R2 BOARD**  
Terminal name of semiconductors in  
silk screen printed circuit (\*)


| Ref.       | * |
|------------|---|
| Q751-Q754  | ① |
| D751, D754 | - |

※: Refer to Terminal name of semiconductors  
in silk screen printed circuit (see page 4-18)



### (1) Schematic Diagrams of A Board








**A** [ TUNER, POWER, FAN CONTROL ]


— A BOARD —

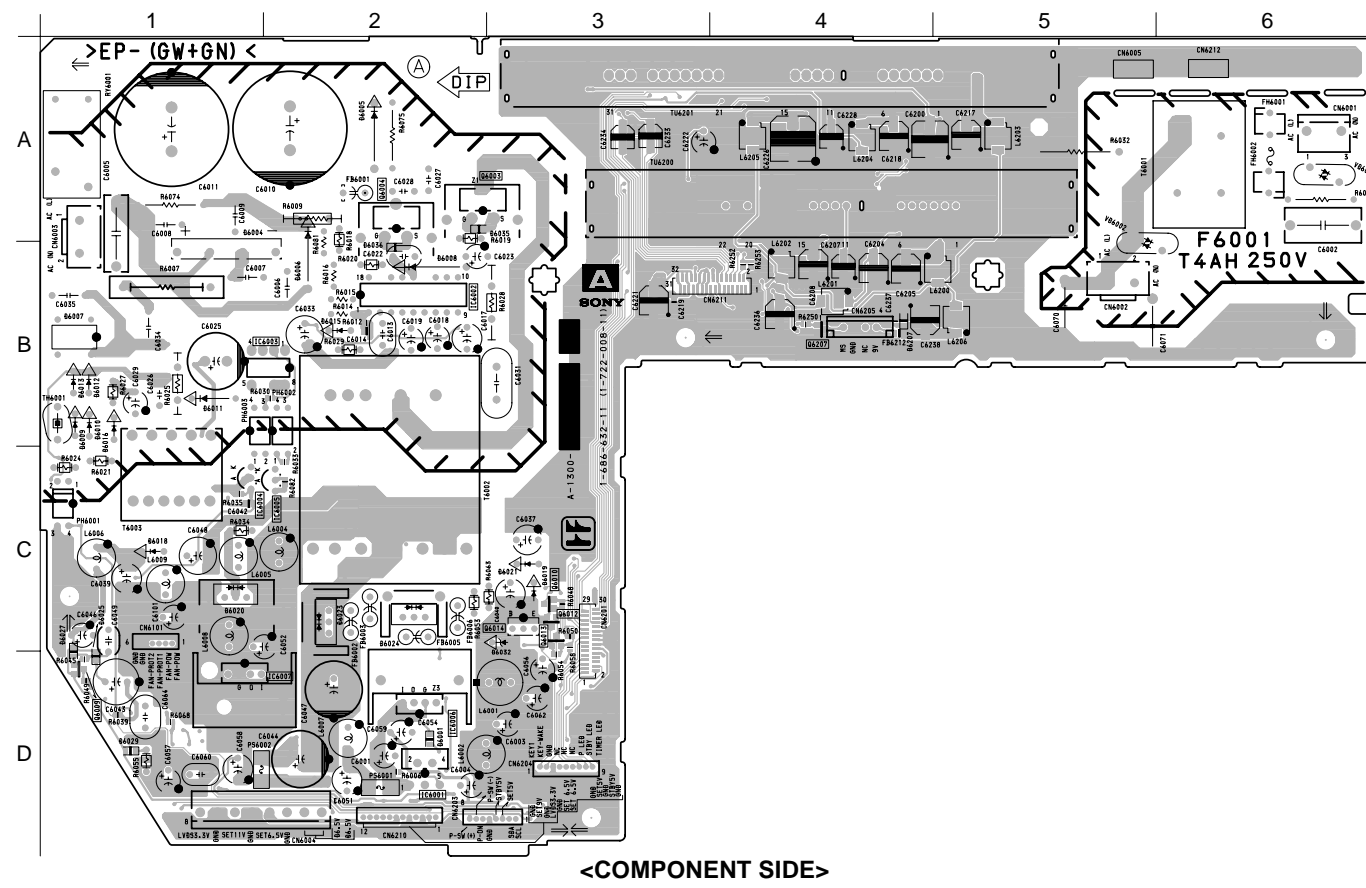

• A BOARD SEMICONDUCTOR LOCATION

| IC               |                  |   | DIODE            |                  |   |
|------------------|------------------|---|------------------|------------------|---|
| (COMPONENT SIDE) | (CONDUCTOR SIDE) | * | (COMPONENT SIDE) | (CONDUCTOR SIDE) | * |
| IC6001           | D-2              |   | D6001            | D-2              | ③ |
| IC6002           | B-2              |   | D6002            | A-2              | ③ |
| IC6003           | B-2              |   | D6003            | A-3              | ③ |
| IC6004           | C-1              |   | D6004            | B-1              | - |
| IC6005           | C-2              |   | D6005            | A-2              | - |
| IC6006           | D-2              |   | D6006            | B-2              | - |
| IC6007           | D-1              |   | D6007            | B-1              | - |
| IC6008           | A-1              |   | D6008            | B-2              | - |
| IC6200           | C-4              |   | D6009            | B-1              | - |
| TRANSISTOR       |                  |   | D6010            | B-1              | - |
| (COMPONENT SIDE) | (CONDUCTOR SIDE) | * | D6011            | B-1              | - |
| Q6001            | A-2              | ① | D6012            | B-1              | - |
| Q6002            | A-2              | ① | D6013            | B-1              | - |
| Q6003            | A-2              | - | D6014            | B-1              | ③ |
| Q6004            | A-2              | - | D6015            | B-2              | - |
| Q6006            | A-1              | ① | D6016            | B-1              | - |
| Q6009            | D-1              | ② | D6017            | B3               | ③ |
| Q6010            | C-3              | ② | D6018            | C-1              | - |
| Q6011            | A-1              | ① | D6019            | C-3              | - |
| Q6012            | C-3              | ② | D6020            | C-1              | - |
| Q6013            | C-3              | ② | D6021            | C-3              | - |
| Q6014            | C-3              | - | D6023            | C-2              | - |
| Q6200            | D-4              | ① | D6024            | C-2              | - |
| Q6201            | D-3              | ① | D6025            | D-1              | ③ |
| Q6202            | D-3              | ① | D6026            | A-2              | ③ |
| Q6203            | D-4              | ① | D6027            | D-1              | ③ |
| Q6204            | D-3              | ① | D6028            | D-1              | ③ |
| Q6205            | D-4              | ① | D6029            | D-1              | ③ |
| Q6206            | D-3              | ① | D6030            | A-2              | ③ |
| Q6207            | B-4              | ② | D6031            | A-2              | ③ |
|                  |                  |   | D6032            | C-3              | - |
|                  |                  |   | D6033            | A-2              | ③ |
|                  |                  |   | D6034            | B-2              | ③ |
|                  |                  |   | D6101            | A-1              | ③ |
|                  |                  |   | D6102            | A-1              | ③ |
|                  |                  |   | D6205            | D-3              | ③ |

※: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-18)

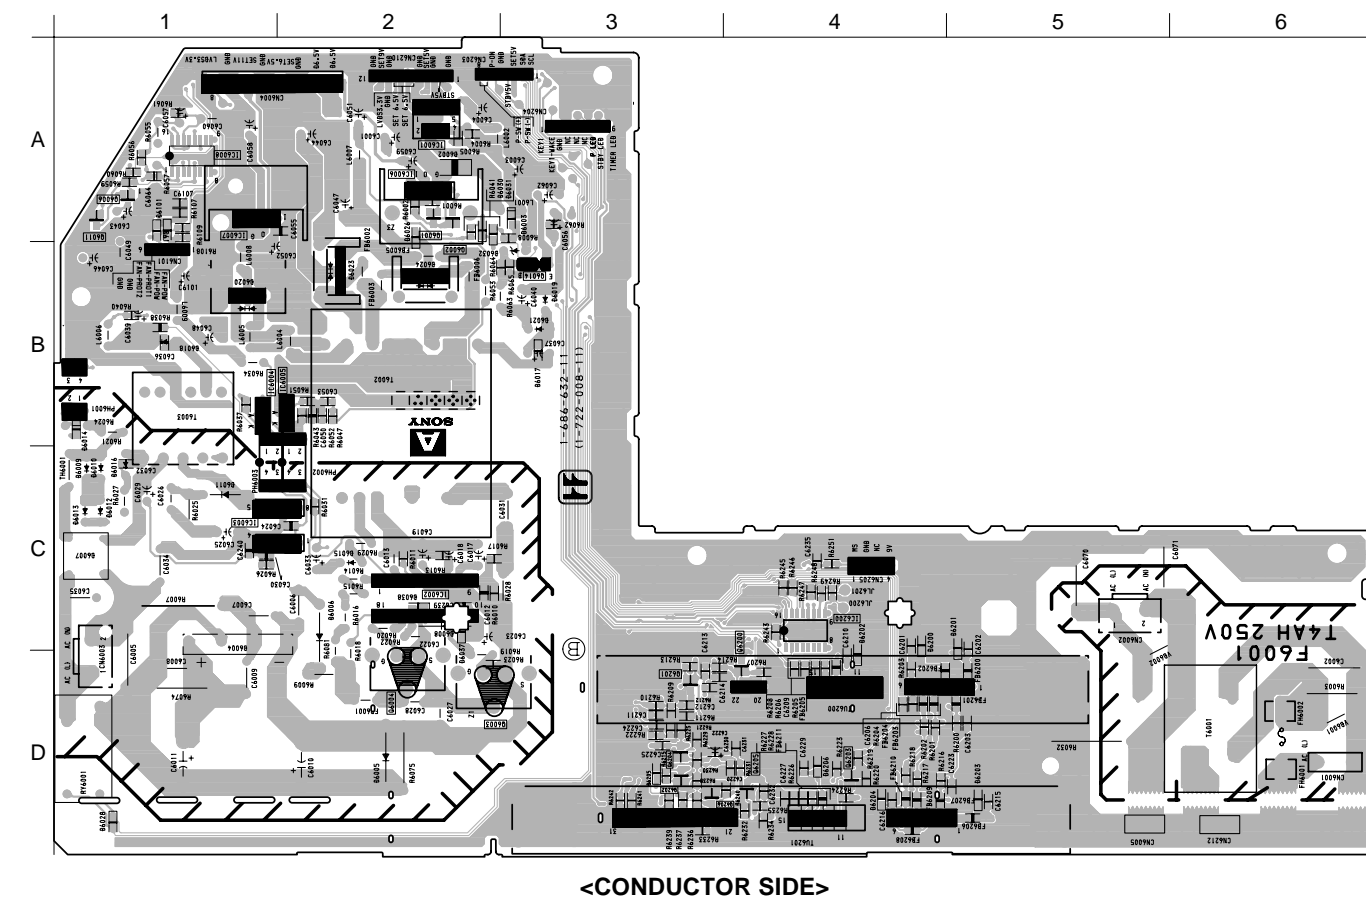



**AD (1/4) (AV SWITCH1)**


The schematic diagram illustrates the internal circuitry of the AD (1/4) (AV SWITCH1) module. The central component is the IC4001 CXA2069Q AV-SW1 chip, which is a video switcher. It is powered by a BS9V supply and has various pins for SDA, SCL, and other control lines. The chip is connected to various input and output signals, including video signals (V1-S, V1-S2, V1-V, V1-Y, V1-C, V1-L, V1-R, V3-S, V3-S2, V3-V, V3-C, V3-L, V3-R), audio signals (MAIN-L, MAIN-R, SUB-L, SUB-R, SUB-Y, SUB-C, SUB-V), and control signals (SET9V, STU-L, MTU-L, MTU-R, MTU-V, SSW2, V2-SW, V2-S2, V2-C, V2-E, V2-Y, V2-V, V2-L, V2-R). The diagram also shows the connection of the chip to the AD (1/4) board and the AD (1/2) board.

**Components and Connections:**


- IC4001 CXA2069Q AV-SW1:** The main video switcher chip.
- Power Supply:** BS9V supply connected to the chip and other components.
- Resistors:** Various resistors (R4001, R4002, R4003, R4004, R4005, R4006, R4007, R4008, R4009, R4010, R4011, R4012, R4013, R4014, R4015, R4016, R4017, R4018, R4019, R4020, R4021, R4022, R4023, R4024, R4025, R4026, R4027, R4028, R4029, R4030, R4031, R4032, R4033, R4034, R4035, R4036, R4037, R4038, R4039, R4040, R4041, R4042, R4043, R4044, R4045, R4046, R4047, R4048, R4049, R4050, R4051, R4052, R4053, R4054, R4055, R4056, R4057, R4058, R4059, R4060, R4061, R4062, R4063, R4064, R4065, R4066, R4067, R4068, R4069, R4070, R4071, R4072, R4073, R4074, R4075, R4076, R4077, R4078, R4079, R4080, R4081, R4082, R4083, R4084, R4085, R4086, R4087, R4088, R4089, R4090, R4091, R4092, R4093, R4094, R4095, R4096, R4097, R4098, R4099, R4100, R4101, R4102, R4103, R4104, R4105, R4106, R4107, R4108, R4109, R4110, R4111, R4112, R4113, R4114, R4115, R4116, R4117, R4118, R4119, R4120, R4121, R4122, R4123, R4124, R4125, R4126, R4127, R4128, R4129, R4130, R4131, R4132, R4133, R4134, R4135, R4136, R4137, R4138, R4139, R4140, R4141, R4142, R4143, R4144, R4145, R4146, R4147, R4148, R4149, R4150, R4151, R4152, R4153, R4154, R4155, R4156, R4157, R4158, R4159, R4160, R4161, R4162, R4163, R4164, R4165, R4166, R4167, R4168, R4169, R4170, R4171, R4172, R4173, R4174, R4175, R4176, R4177, R4178, R4179, R4180, R4181, R4182, R4183, R4184, R4185, R4186, R4187, R4188, R4189, R4190, R4191, R4192, R4193, R4194, R4195, R4196, R4197, R4198, R4199, R4200, R4201, R4202, R4203, R4204, R4205, R4206, R4207, R4208, R4209, R4210, R4211, R4212, R4213, R4214, R4215, R4216, R4217, R4218, R4219, R4220, R4221, R4222, R4223, R4224, R4225, R4226, R4227, R4228, R4229, R4230, R4231, R4232, R4233, R4234, R4235, R4236, R4237, R4238, R4239, R4240, R4241, R4242, R4243, R4244, R4245, R4246, R4247, R4248, R4249, R4250, R4251, R4252, R4253, R4254, R4255, R4256, R4257, R4258, R4259, R4260, R4261, R4262, R4263, R4264, R4265, R4266, R4267, R4268, R4269, R4270, R4271, R4272, R4273, R4274, R4275, R4276, R4277, R4278, R4279, R4280, R4281, R4282, R4283, R4284, R4285, R4286, R4287, R4288, R4289, R4290, R4291, R4292, R4293, R4294, R4295, R4296, R4297, R4298, R4299, R4300, R4301, R4302, R4303, R4304, R4305, R4306, R4307, R4308, R4309, R4310, R4311, R4312, R4313, R4314, R4315, R4316, R4317, R4318, R4319, R4320, R4321, R4322, R4323, R4324, R4325, R4326, R4327, R4328, R4329, R4330, R4331, R4332, R4333, R4334, R4335, R4336, R4337, R4338, R4339, R4340, R4341, R4342, R4343, R4344, R4345, R4346, R4347, R4348, R4349, R4350, R4351, R4352, R4353, R4354, R4355, R4356, R4357, R4358, R4359, R4360, R4361, R4362, R4363, R4364, R4365, R4366, R4367, R4368, R4369, R4370, R4371, R4372, R4373, R4374, R4375, R4376, R4377, R4378, R4379, R4380, R4381, R4382, R4383, R4384, R4385, R4386, R4387, R4388, R4389, R4390, R4391, R4392, R4393, R4394, R4395, R4396, R4397, R4398, R4399, R4400, R4401, R4402, R4403, R4404, R4405, R4406, R4407, R4408, R4409, R4410, R4411, R4412, R4413, R4414, R4415, R4416, R4417, R4418, R4419, R4420, R4421, R4422, R4423, R4424, R4425, R4426, R4427, R4428, R4429, R4430, R4431, R4432, R4433, R4434, R4435, R4436, R4437, R4438, R4439, R4440, R4441, R4442, R4443, R4444, R4445, R4446, R4447, R4448, R4449, R4450, R4451, R4452, R4453, R4454, R4455, R4456, R4457, R4458, R4459, R4460, R4461, R4462, R4463, R4464, R4465, R4466, R4467, R4468, R4469, R4470, R4471, R4472, R4473, R4474, R4475, R4476, R4477, R4478, R4479, R4480, R4481, R4482, R4483, R4484, R4485, R4486, R4487, R4488, R4489, R4490, R4491, R4492, R4493, R4494, R4495, R4496, R4497, R4498, R4499, R4500, R4501, R4502, R4503, R4504, R4505, R4506, R4507, R4508, R4509, R4510, R4511, R4512, R4513, R4514, R4515, R4516, R4517, R4518, R4519, R4520, R4521, R4522, R4523, R4524, R4525, R4526, R4527, R4528, R4529, R4530, R4531, R4532, R4533, R4534, R4535, R4536, R4537, R4538, R4539, R4540, R4541, R4542, R4543, R4544, R4545, R4546, R4547, R4548, R4549, R4550, R4551, R4552, R4553, R4554, R4555, R4556, R4557, R4558, R4559, R4560, R4561, R4562, R4563, R4564, R4565, R4566, R4567, R4568, R4569, R4570, R4571, R4572, R4573, R4574, R4575, R4576, R4577, R4578, R457



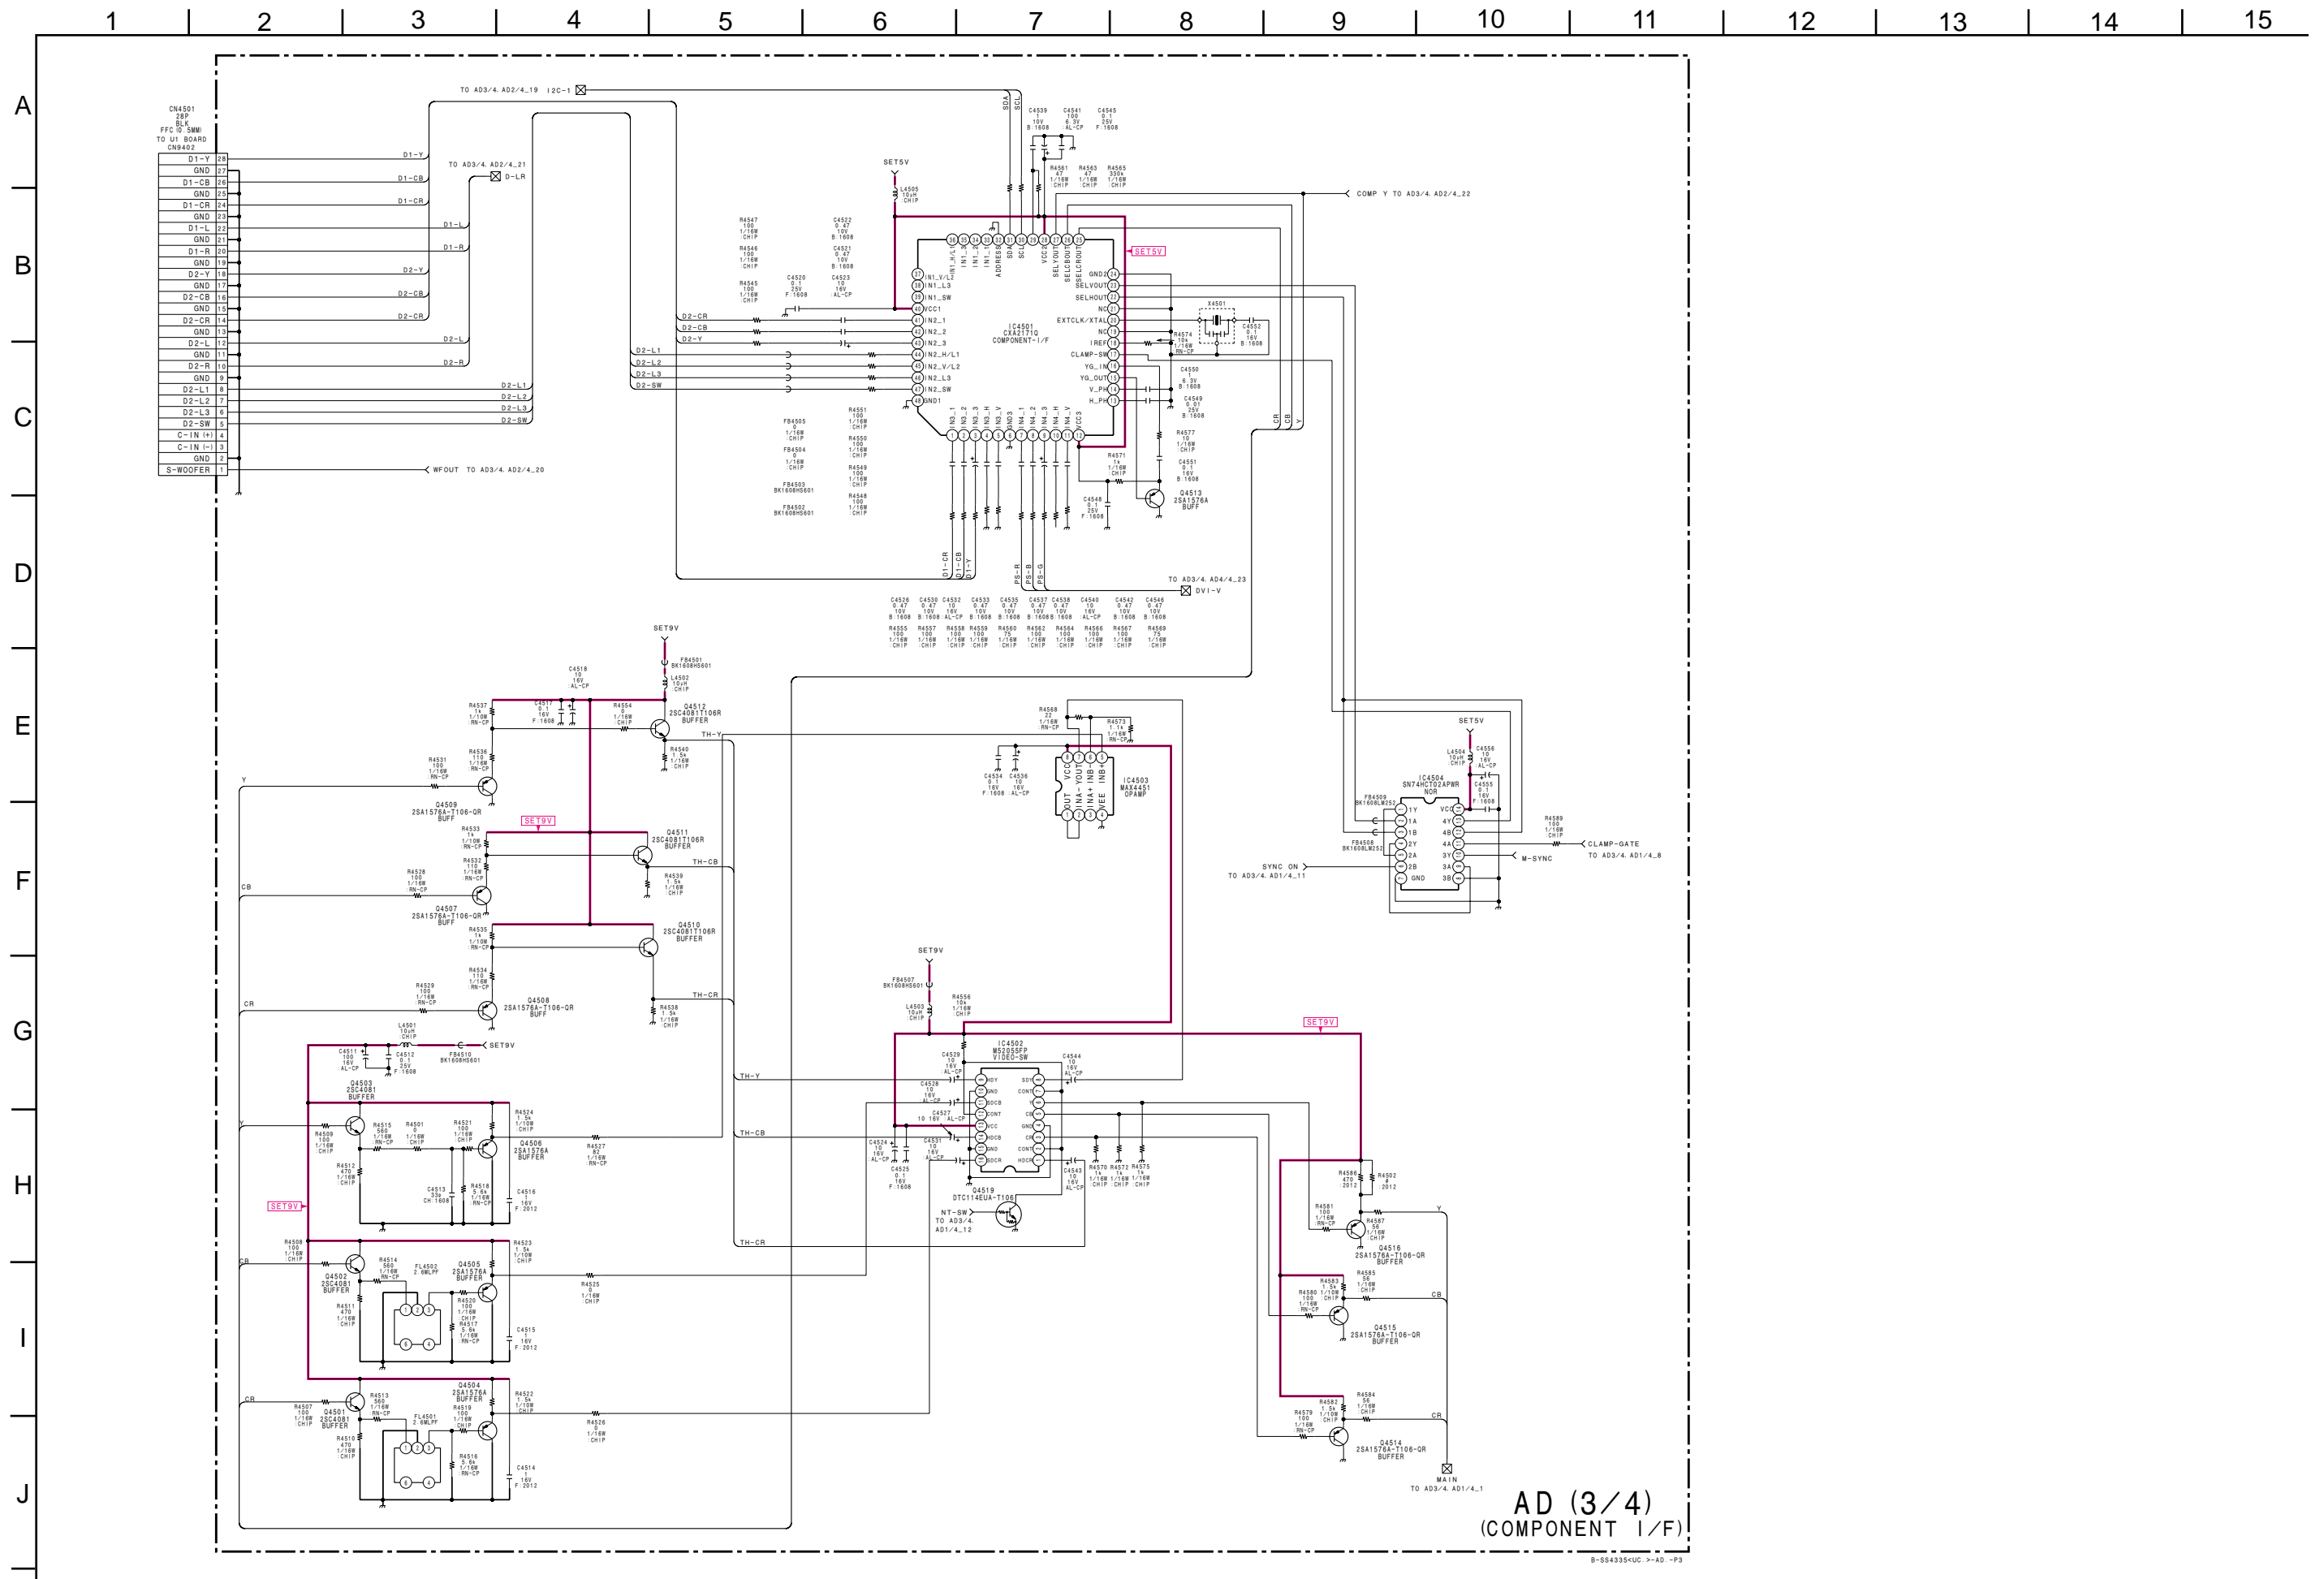


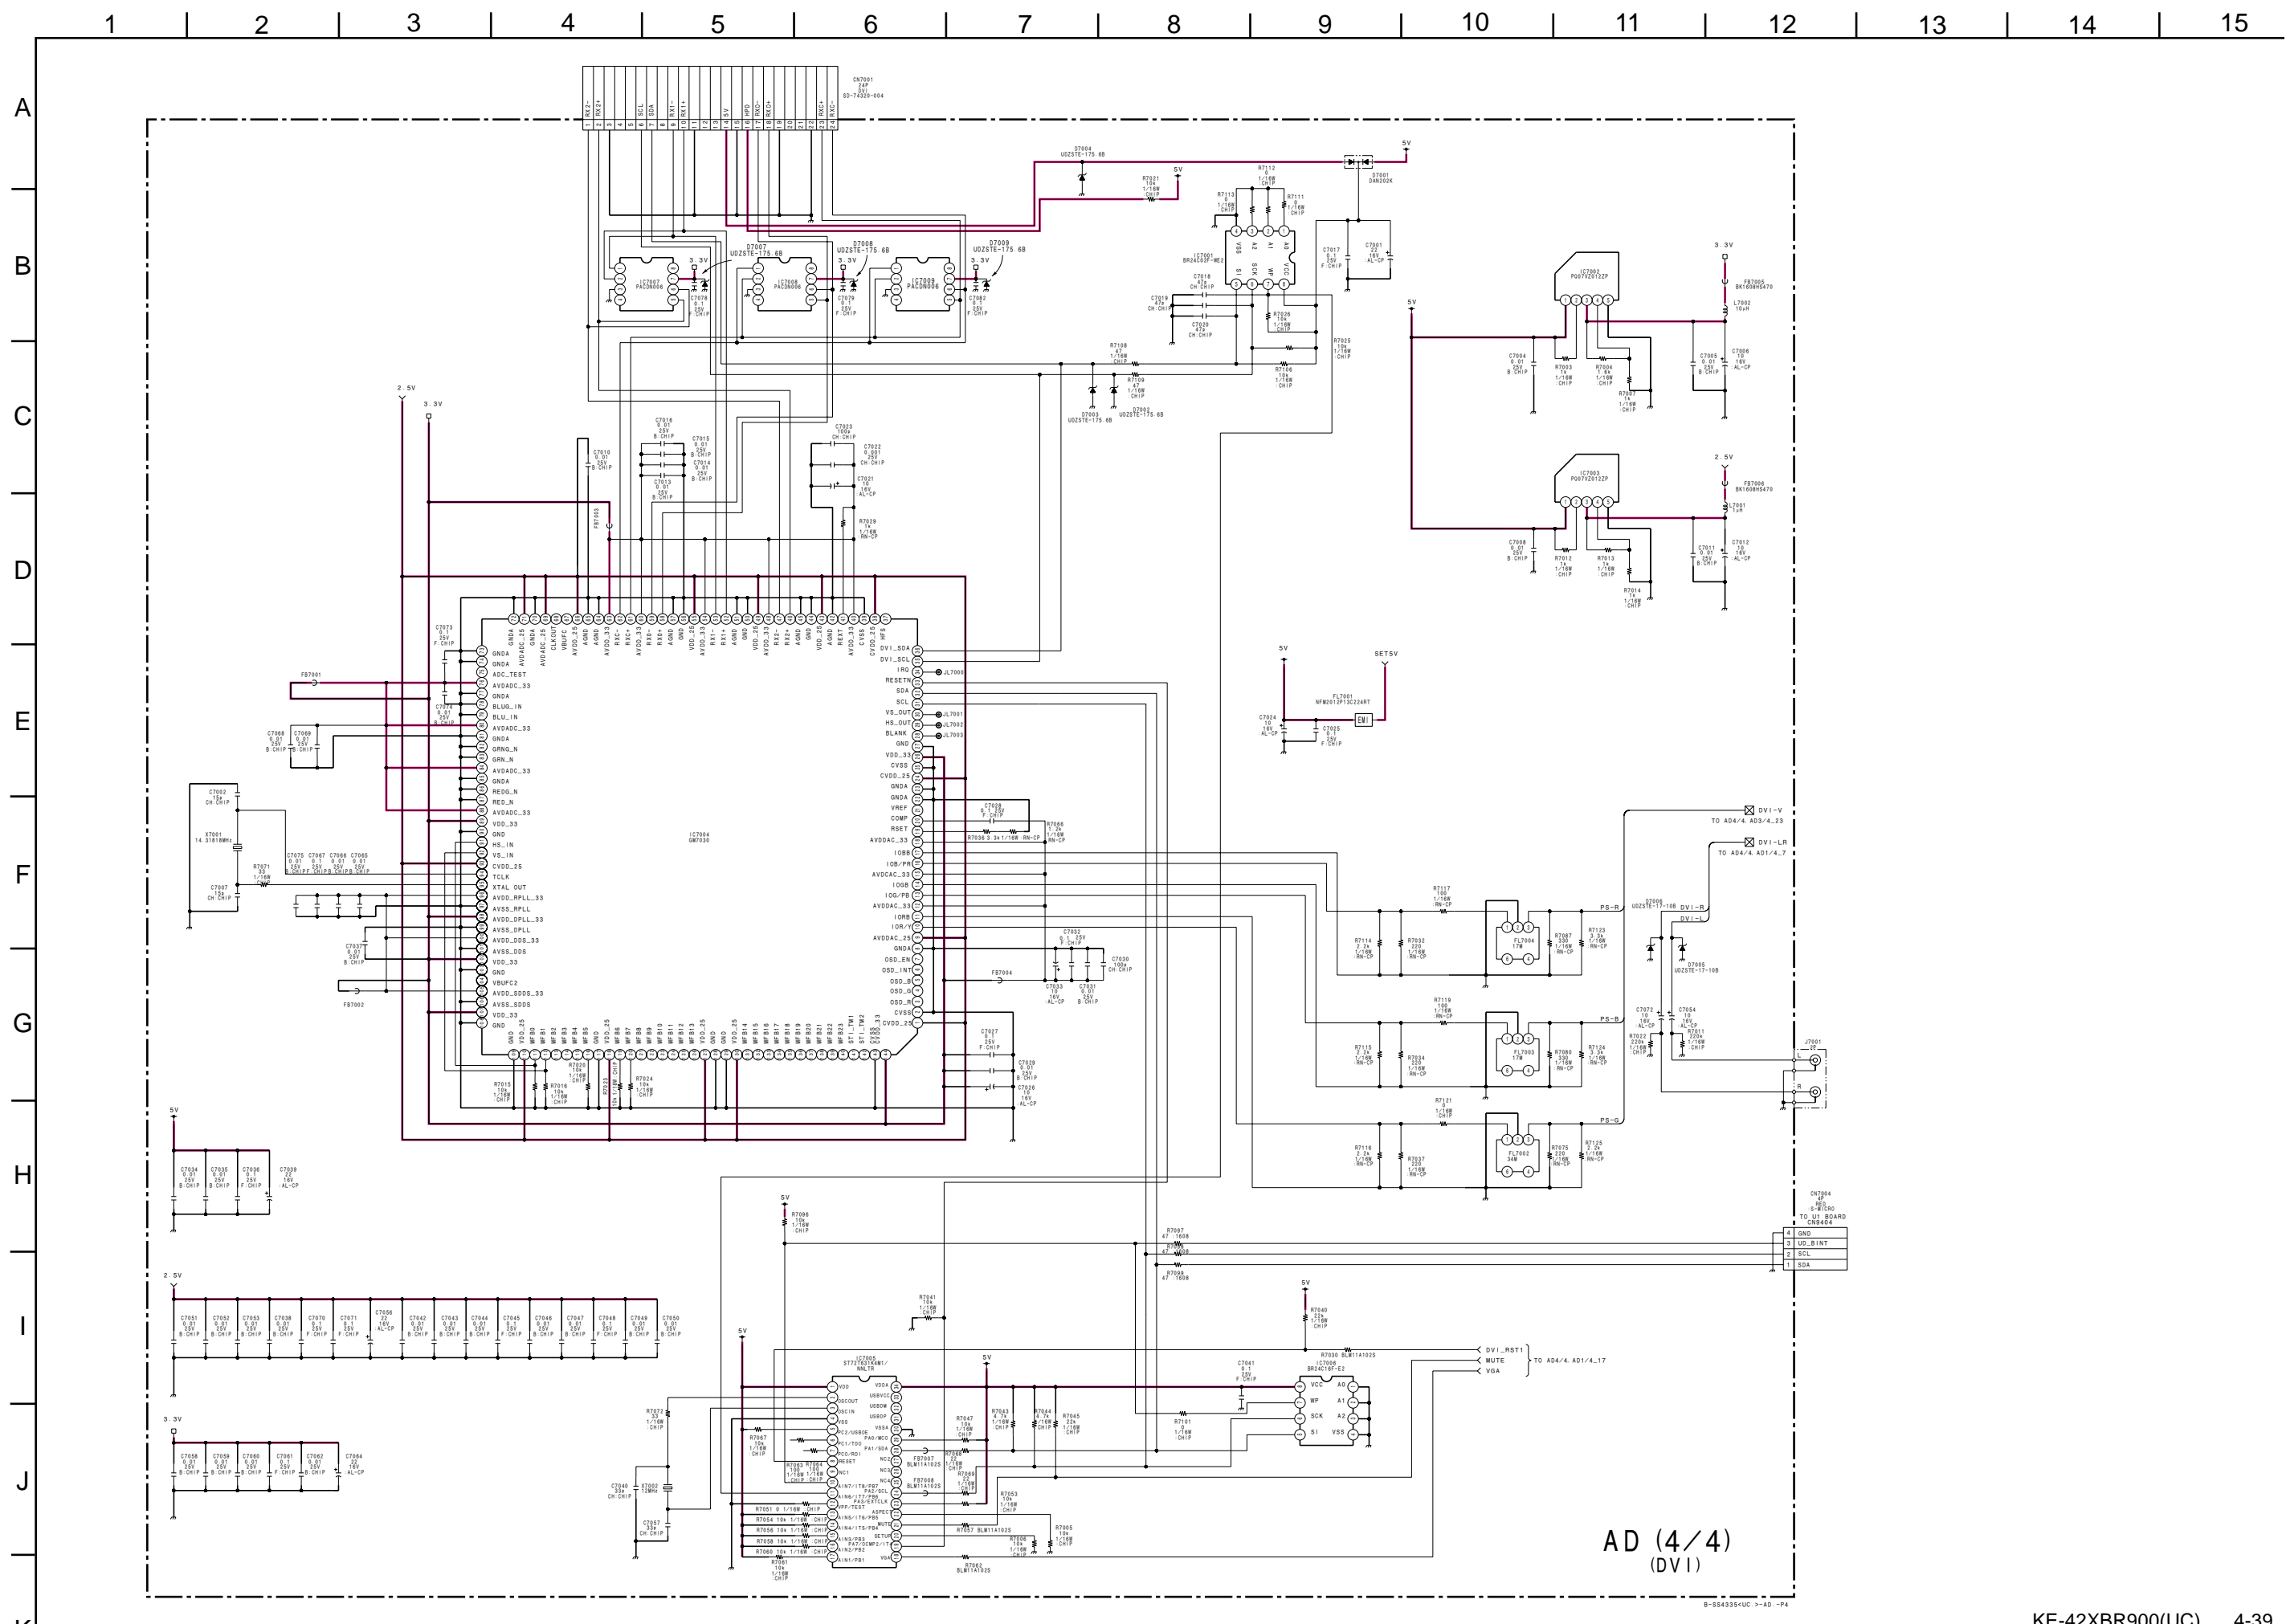

— AD BOARD —

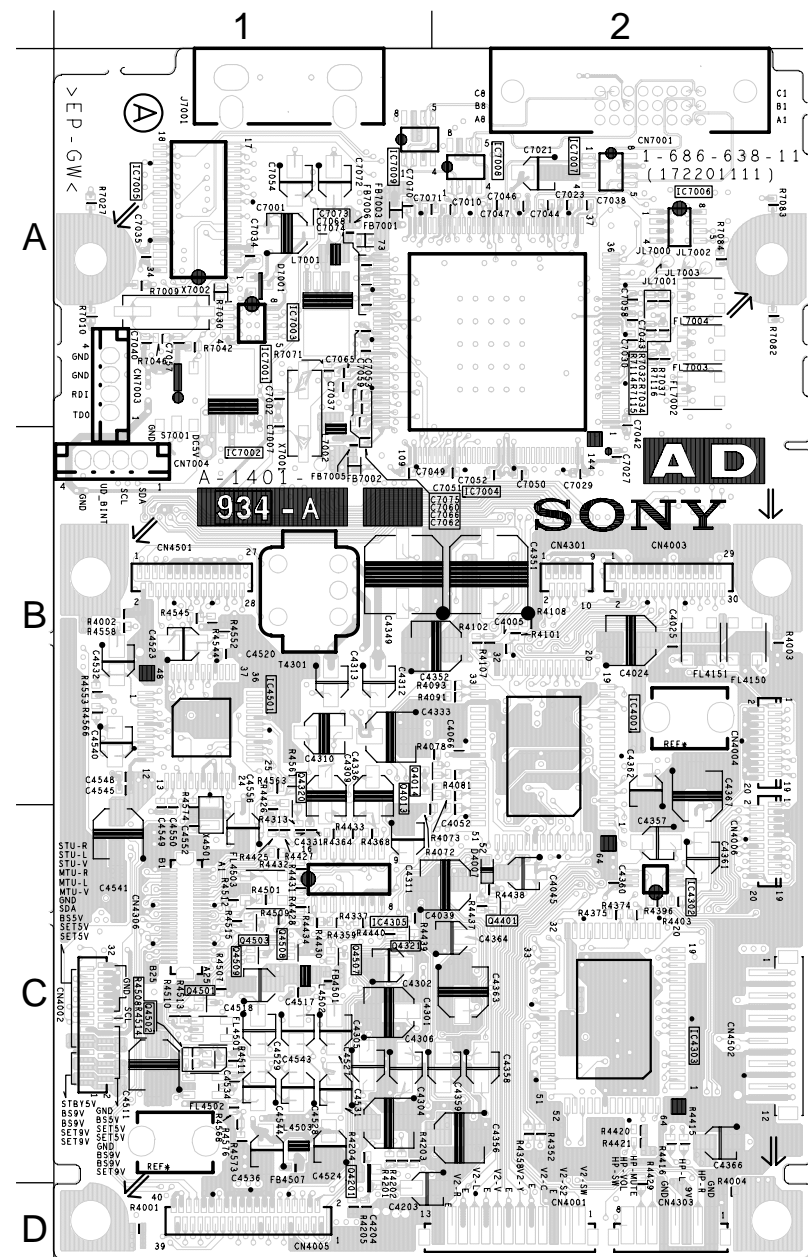


**<COMPONENT SIDE>**

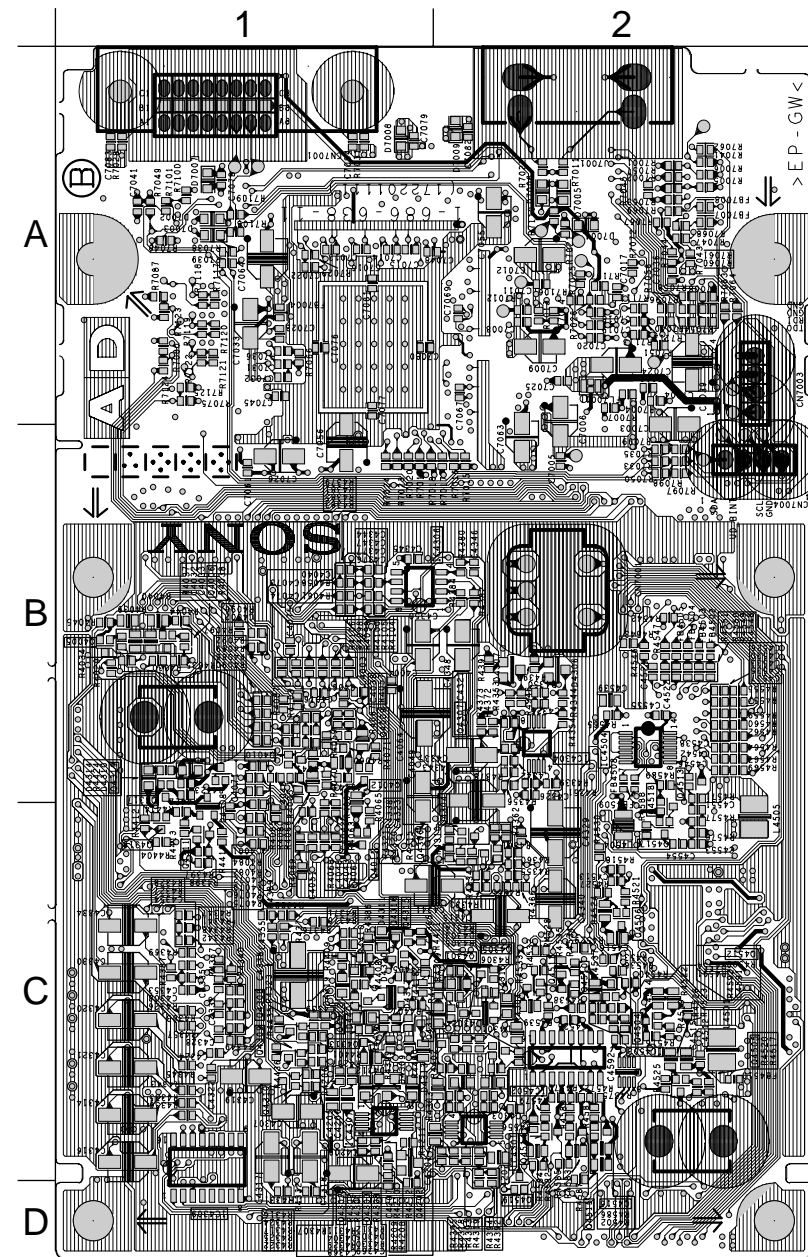

**<CONDUCTOR SIDE>**




### (3) Schematic Diagram of AU Board

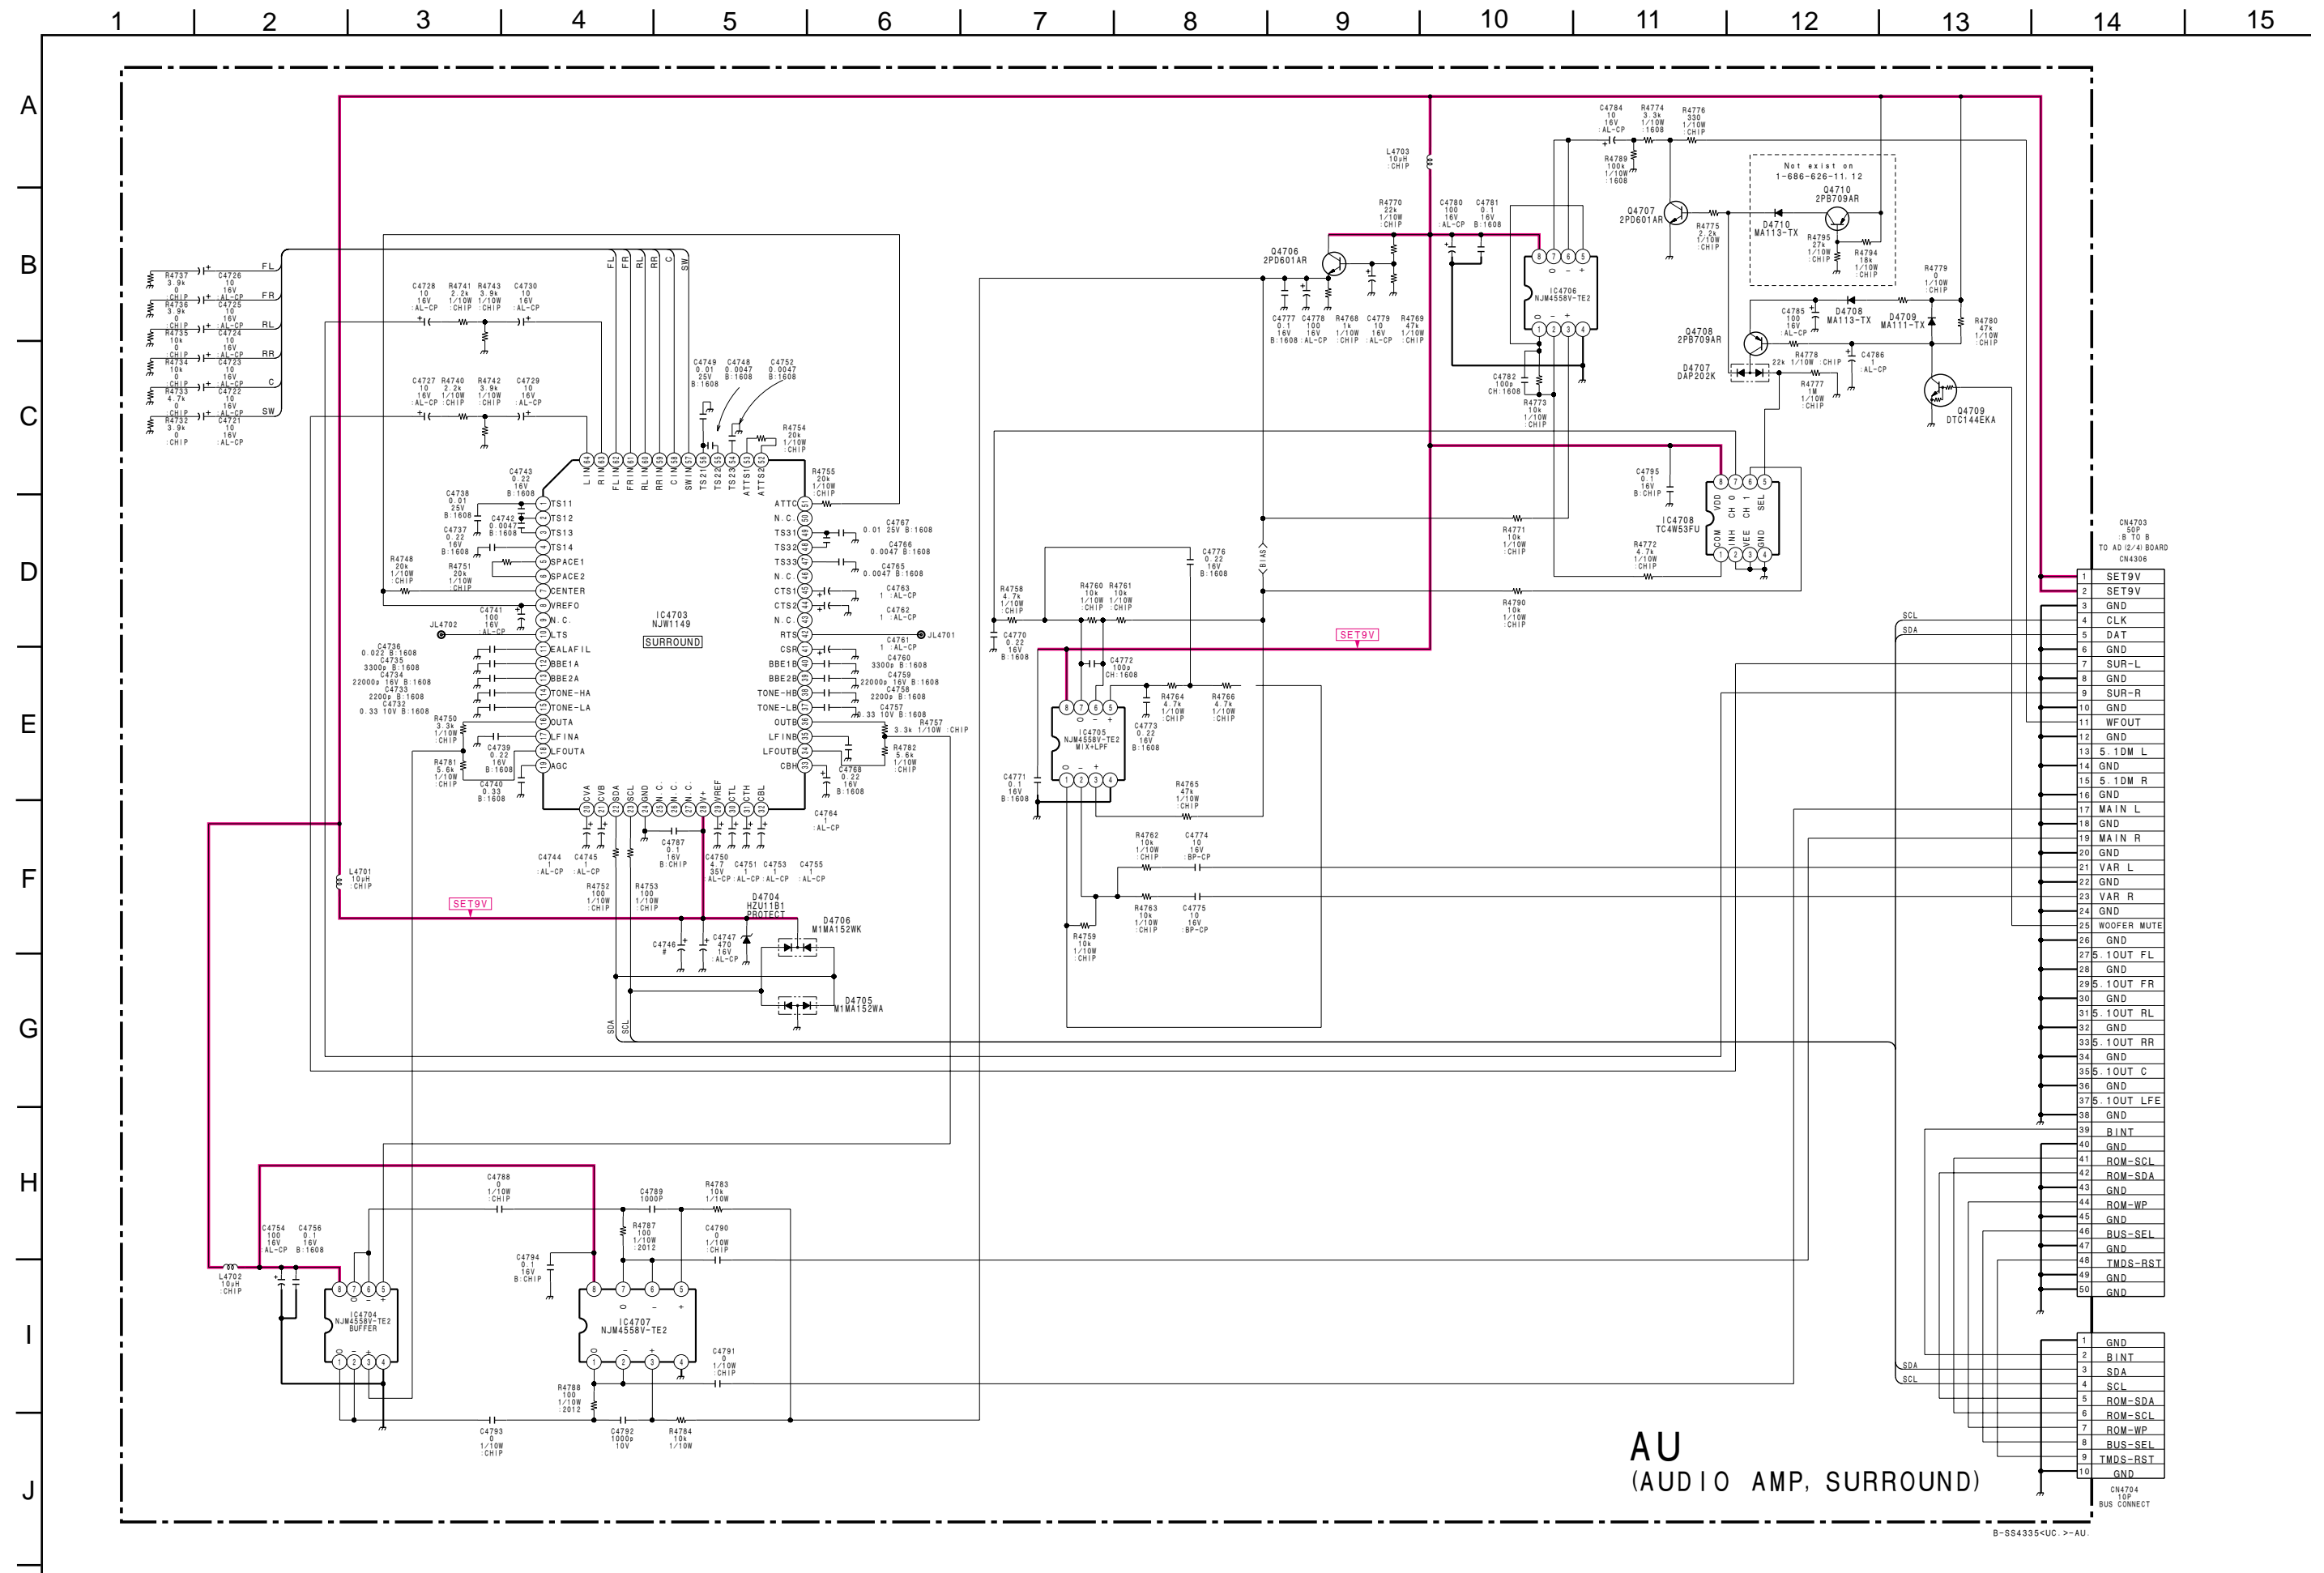


**AU** [ AUDIO AMP, SURROUND ]

— AU BOARD —

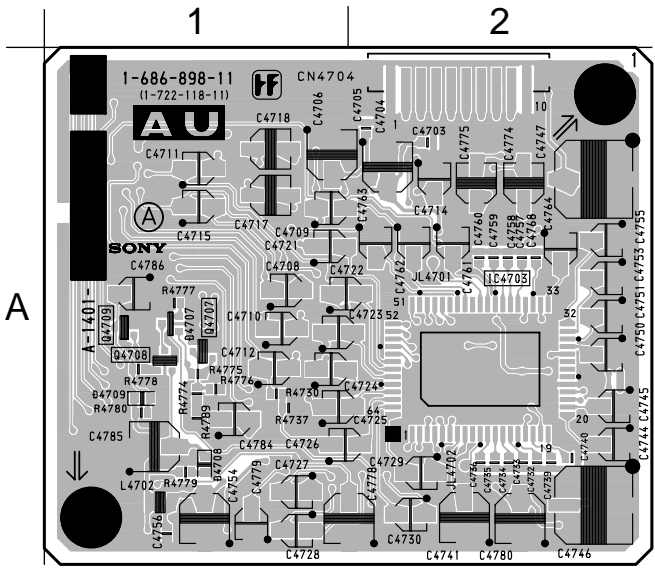

<COMPONENT SIDE>

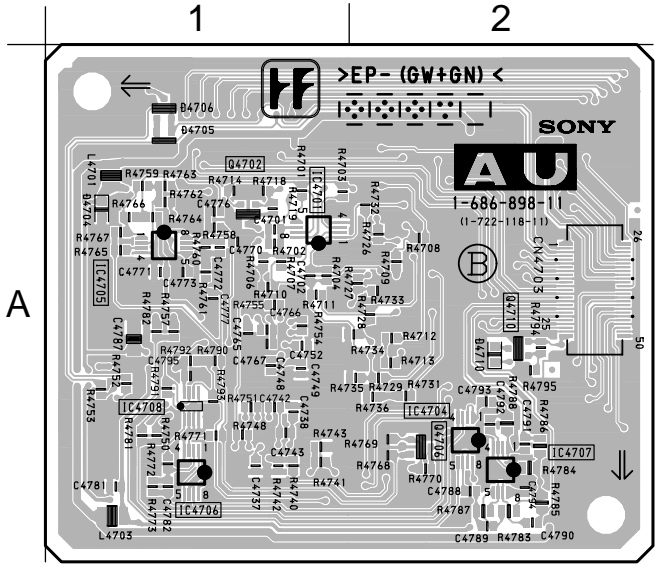

<CONDUCTOR SIDE>


• AU BOARD SEMICONDUCTOR LOCATION

| IC               |                  |     |
|------------------|------------------|-----|
| (COMPONENT SIDE) | (CONDUCTOR SIDE) |     |
| IC4703           | A-2              |     |
| IC4704           |                  | A-2 |
| IC4705           |                  | A-1 |
| IC4706           |                  | A-1 |
| IC4707           |                  | A-2 |
| IC4708           |                  | A-1 |
| TRANSISTOR       |                  |     |
| (COMPONENT SIDE) | (CONDUCTOR SIDE) | *   |
| Q4706            | A-2              | ②   |
| Q4707            | A-1              | ②   |
| Q4708            | A-1              | ②   |
| Q4709            | A-1              | ②   |
| Q4710            | A-2              | ②   |
| DIODE            |                  |     |
| (COMPONENT SIDE) | (CONDUCTOR SIDE) | *   |
| D4704            | A-1              | ③   |
| D4705            | A-1              | ⑩   |
| D4706            | A-1              | ⑨   |
| D4707            | A-1              | ⑪   |
| D4708            | A-1              | ③   |
| D4709            | A-1              | ③   |
| D4710            | A-2              | ③   |

\*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-18)



(4) Schematic Diagram of DP Board

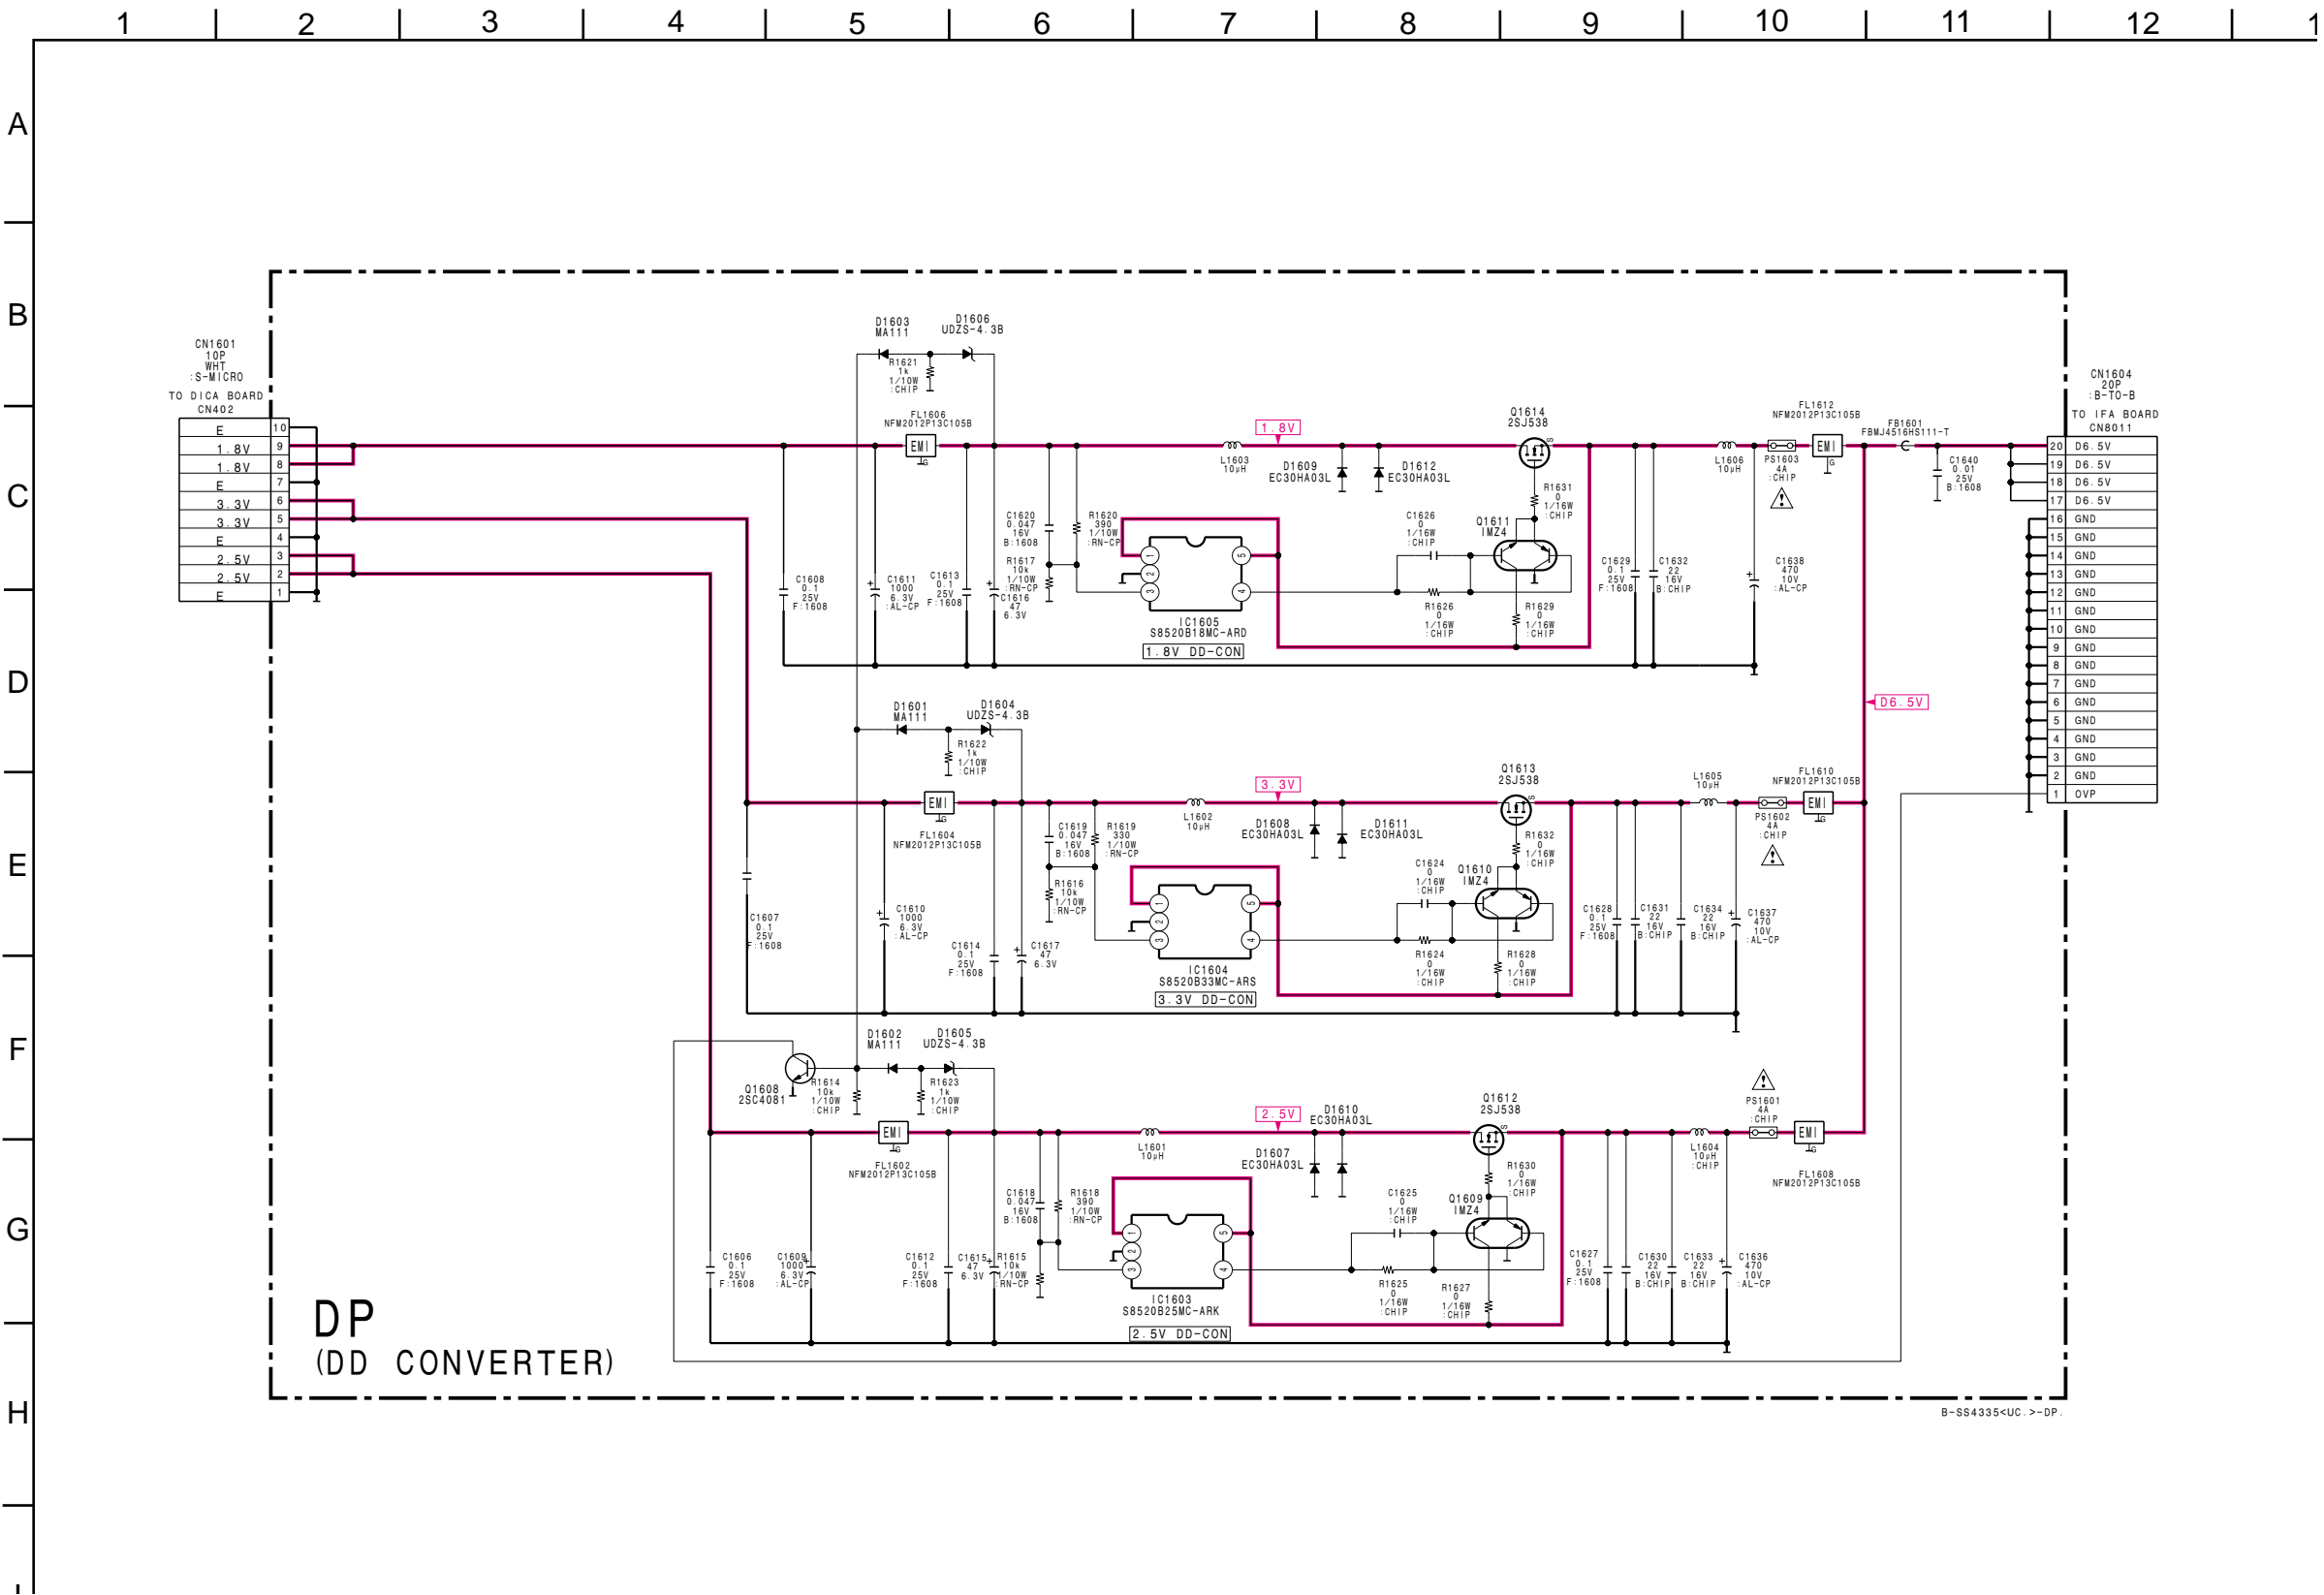



| IC                  |                     |  |
|---------------------|---------------------|--|
| (COMPONENT<br>SIDE) | (CONDUCTOR<br>SIDE) |  |
| IC1603              | A-2                 |  |
| IC1604              | A-2                 |  |
| IC1605              | A-2                 |  |


| TRANSISTOR          |                     |    |
|---------------------|---------------------|----|
| (COMPONENT<br>SIDE) | (CONDUCTOR<br>SIDE) | *  |
| Q1608               | A-3                 | ②  |
| Q1609               | A-2                 | ②⑩ |
| Q1610               | A-2                 | ②⑩ |
| Q1611               | A-2                 | ②⑩ |
| Q1612               | A-2                 | ⑩  |
| Q1613               | A-2                 | ⑩  |
| Q1614               | A-2                 | ⑩  |

| DIODE               |                     |   |
|---------------------|---------------------|---|
| (COMPONENT<br>SIDE) | (CONDUCTOR<br>SIDE) | * |
| D1601               | A-3                 | ③ |
| D1602               | A-3                 | ③ |
| D1603               | A-3                 | ③ |
| D1604               | A-3                 | ③ |
| D1605               | A-3                 | ③ |
| D1606               | A-3                 | ③ |
| D1607               | A-3                 | ③ |
| D1608               | A-3                 | ③ |
| D1609               | A-3                 | ③ |
| D1610               | A-3                 | ③ |
| D1611               | A-3                 | ③ |
| D1612               | A-3                 | ③ |


KE-42XBR900(UC) 4-44

(5) Schematic Diagrams of H1 and H5 Boards

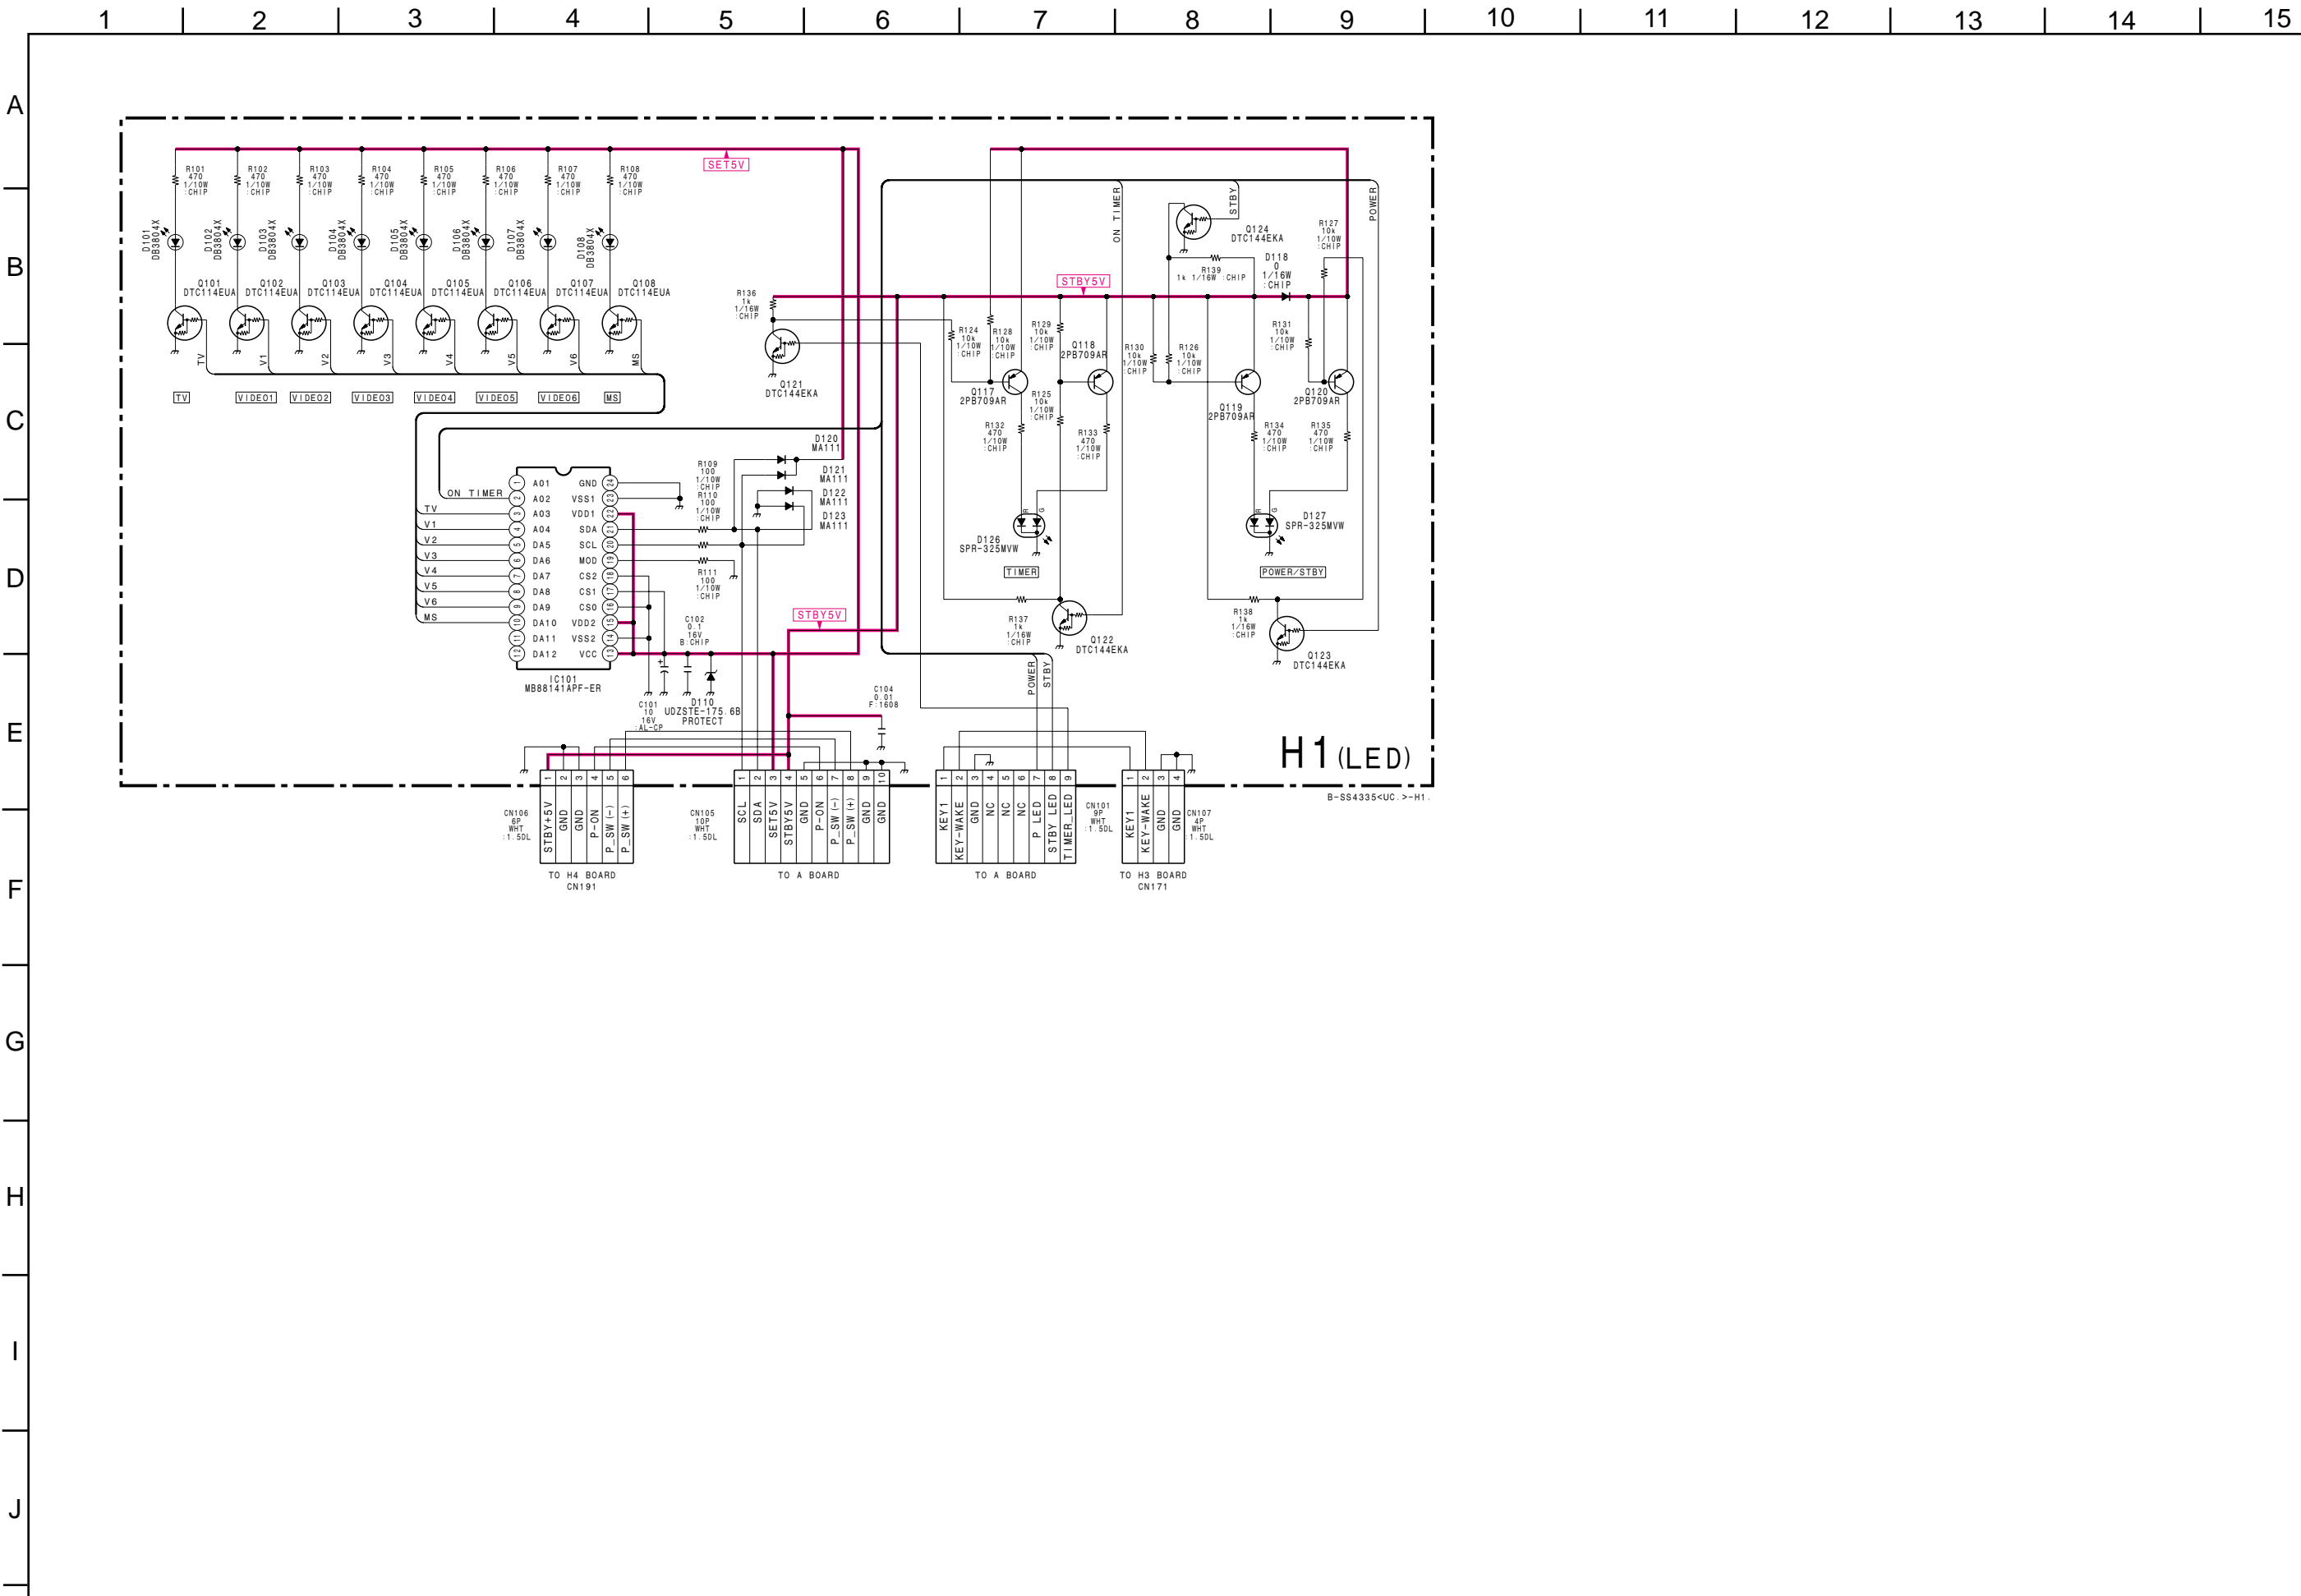


**H1** [ LED ]

— H1 BOARD —

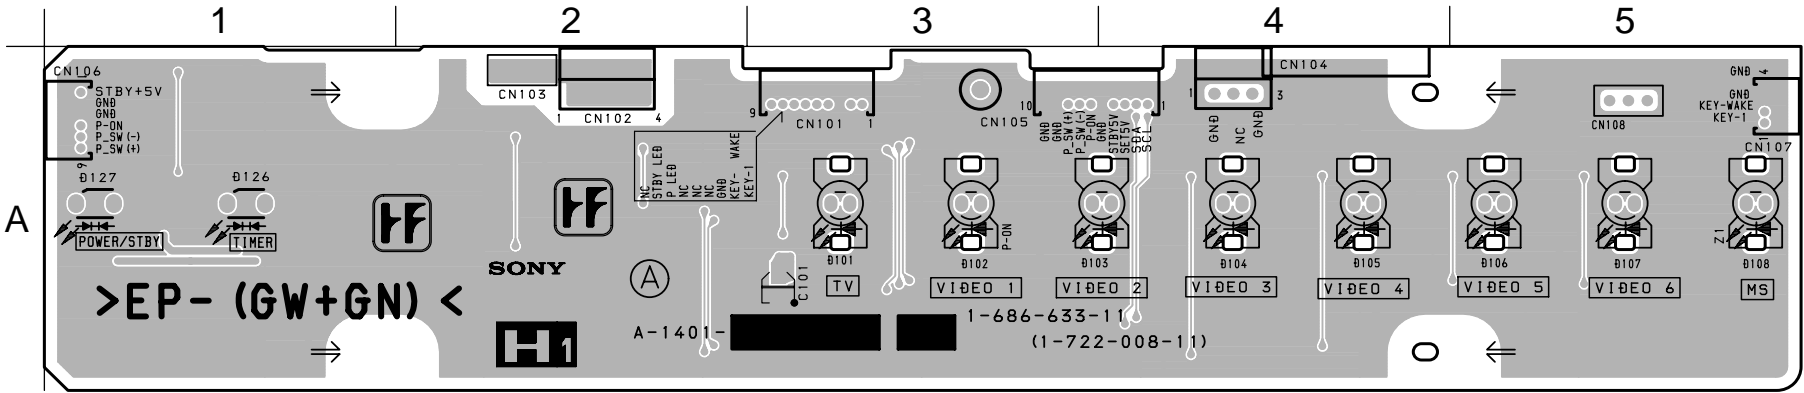

<COMPONENT SIDE>

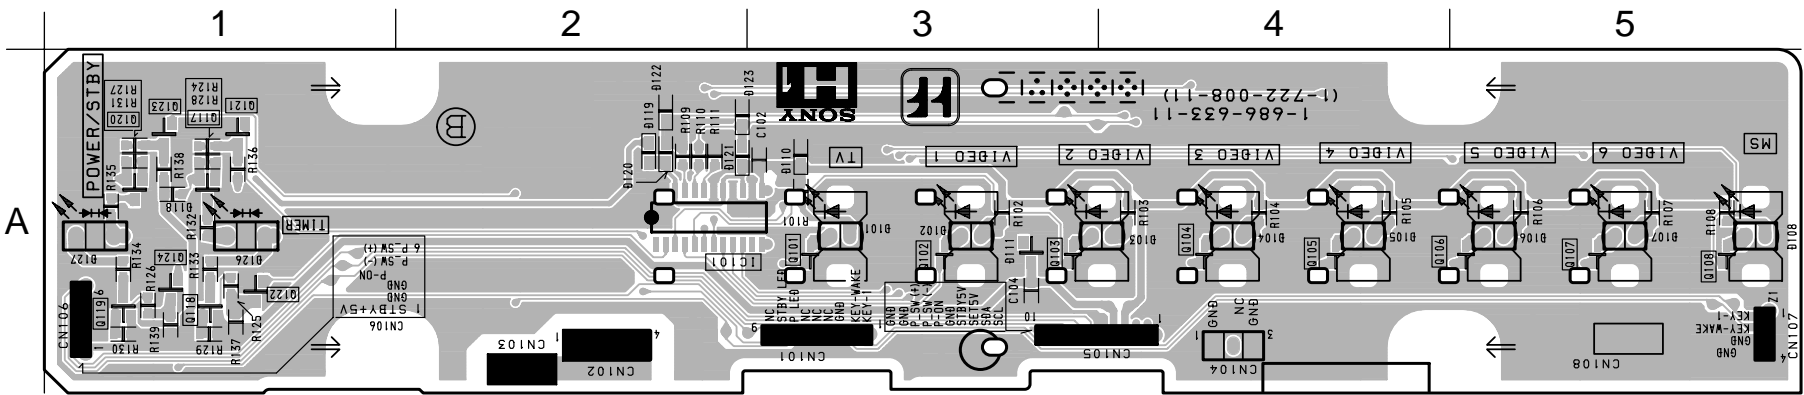


<CONDUCTOR SIDE>

• H1 BOARD SEMICONDUCTOR LOCATION

| IC               |                  |   |
|------------------|------------------|---|
| (COMPONENT SIDE) | (CONDUCTOR SIDE) | * |
| IC101            | A-2              |   |
| TRANSISTOR       |                  |   |
| (COMPONENT SIDE) | (CONDUCTOR SIDE) | * |
| Q101             | A-3              | ① |
| Q102             | A-3              | ① |
| Q103             | A-3              | ① |
| Q104             | A-4              | ① |
| Q105             | A-4              | ① |
| Q106             | A-5              | ① |
| Q107             | A-5              | ① |
| Q108             | A-5              | ① |
| Q117             | A-1              | ① |
| Q118             | A-1              | ① |
| Q119             | A-1              | ① |
| Q120             | A-1              | ① |
| Q121             | A-1              | ① |
| Q122             | A-1              | ① |
| Q123             | A-1              | ① |
| Q124             | A-1              | ① |
| DIODE            |                  |   |
| (COMPONENT SIDE) | (CONDUCTOR SIDE) | * |
| D101             | A-3              | - |
| D102             | A-3              | - |
| D103             | A-4              | - |
| D104             | A-4              | - |
| D105             | A-4              | - |
| D106             | A-5              | - |
| D107             | A-5              | - |
| D108             | A-5              | - |
| D110             | A-3              | ③ |
| D118             | A-1              | - |
| D120             | A-2              | ③ |
| D121             | A-2              | ③ |
| D122             | A-2              | ③ |
| D123             | A-2              | ③ |
| D126             | A-1              | - |
| D127             | A-1              | - |



※: Refer Terminal name of semiconductors  
in silkscreen printed circuit (see page 4-18)

(6) Schematic Diagram of H2 Board

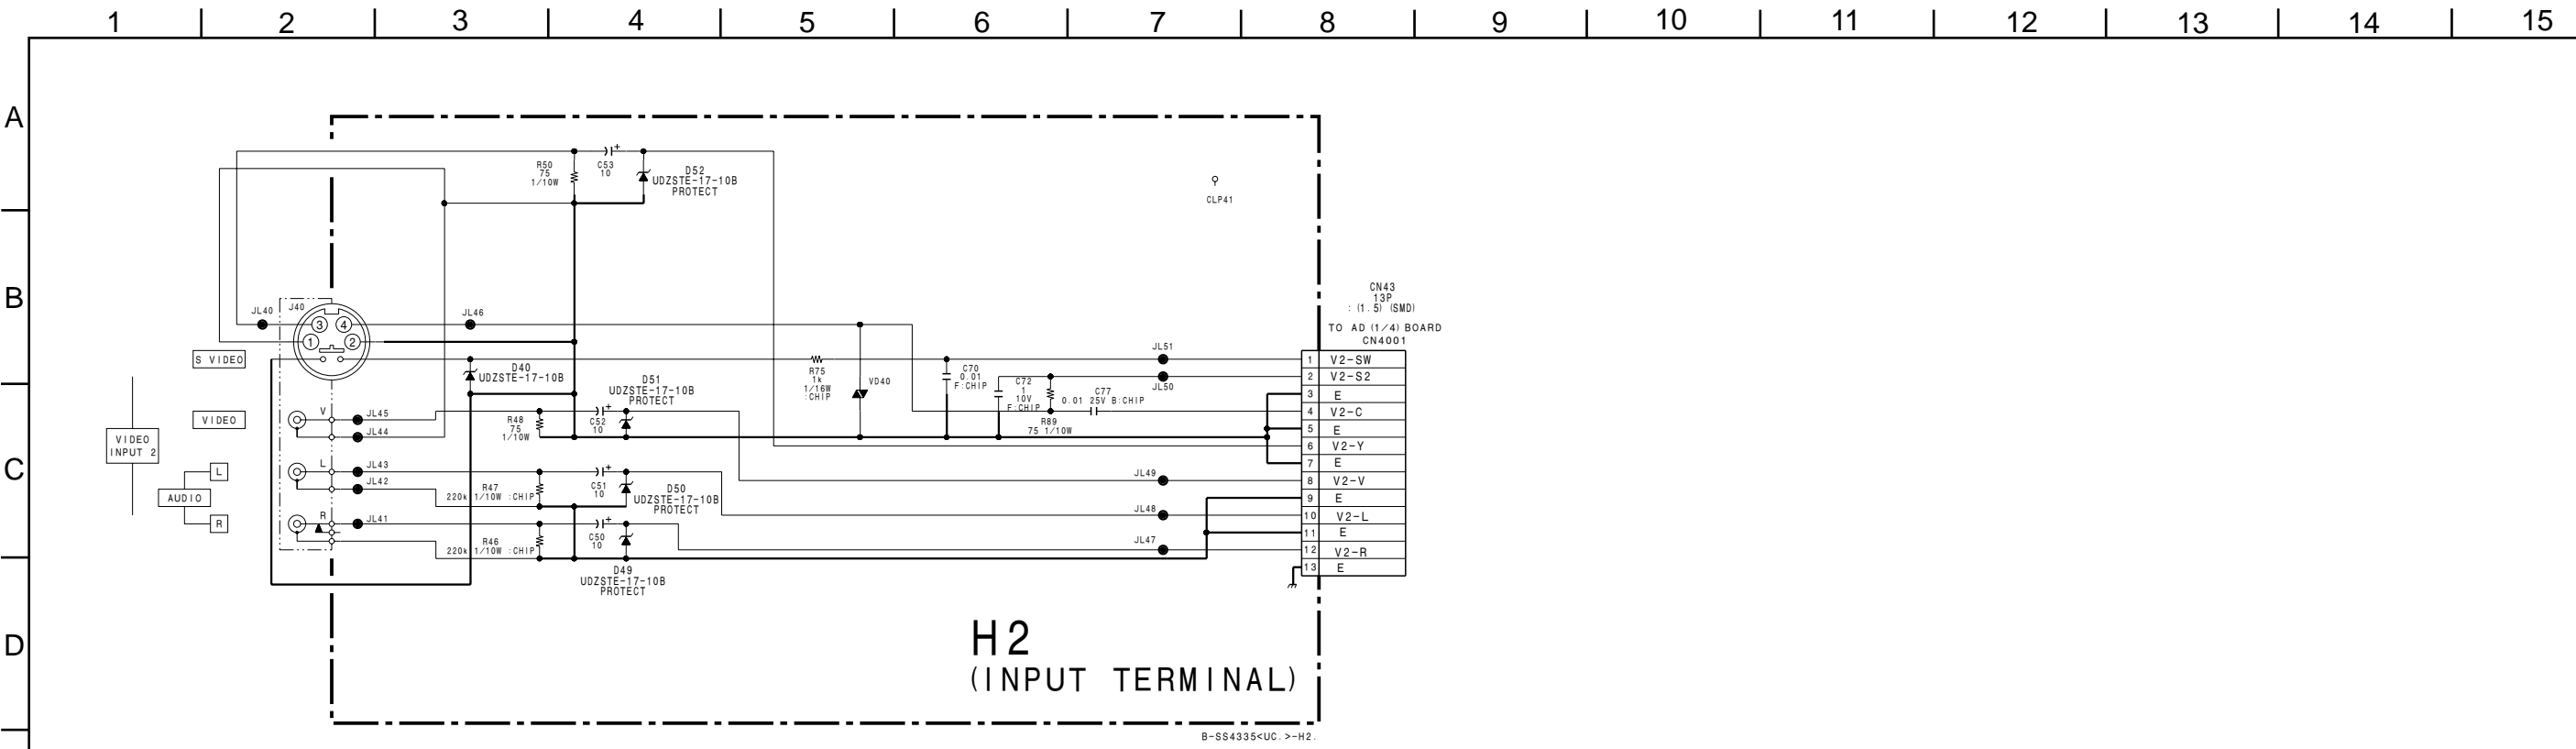

**H2** [ INPUT TERMINAL ]

— H2 BOARD —

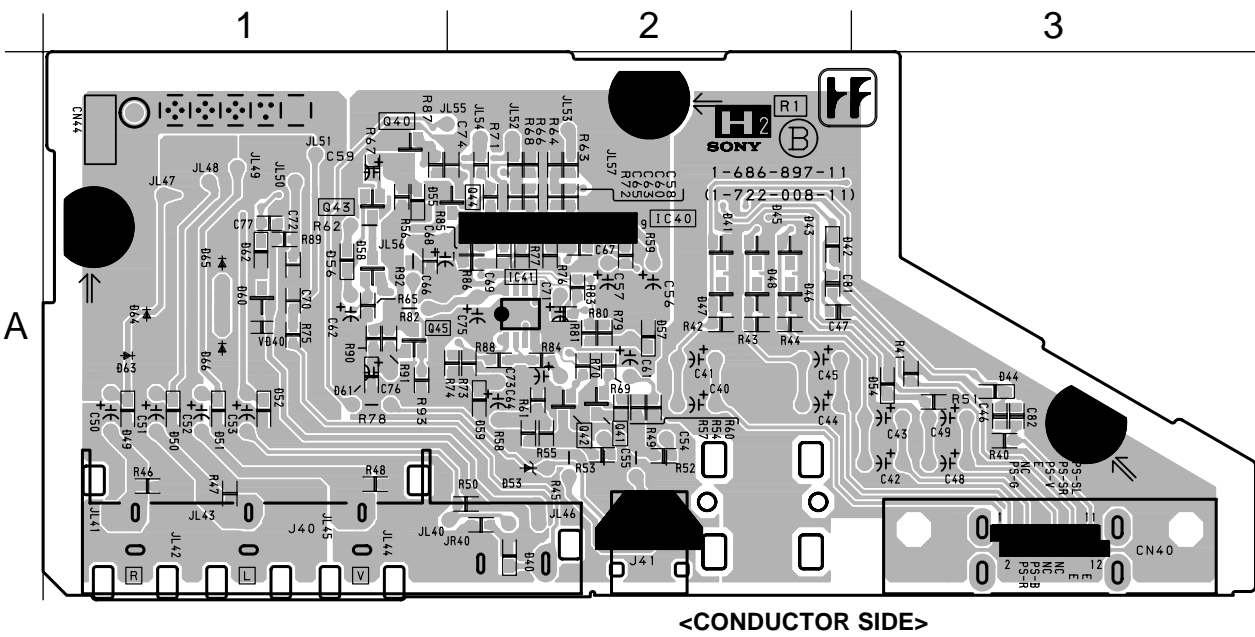
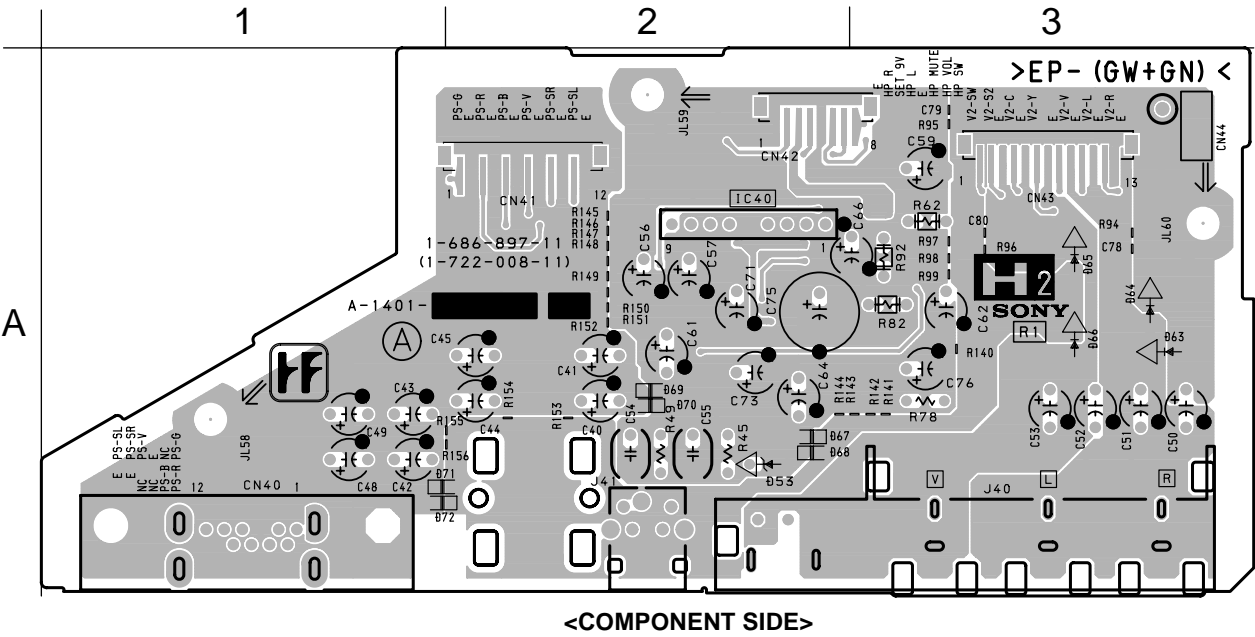


• H2 BOARD SEMICONDUCTOR LOCATION

| DIODE            |                  |   |
|------------------|------------------|---|
| (COMPONENT SIDE) | (CONDUCTOR SIDE) | * |
| D40              | A-2              | ③ |
| D49              | A-1              | ③ |
| D50              | A-1              | ③ |
| D51              | A-1              | ③ |
| D52              | A-1              | ③ |


※: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-18)

(7) Schematic Diagrams of H3 AND H4 Boards

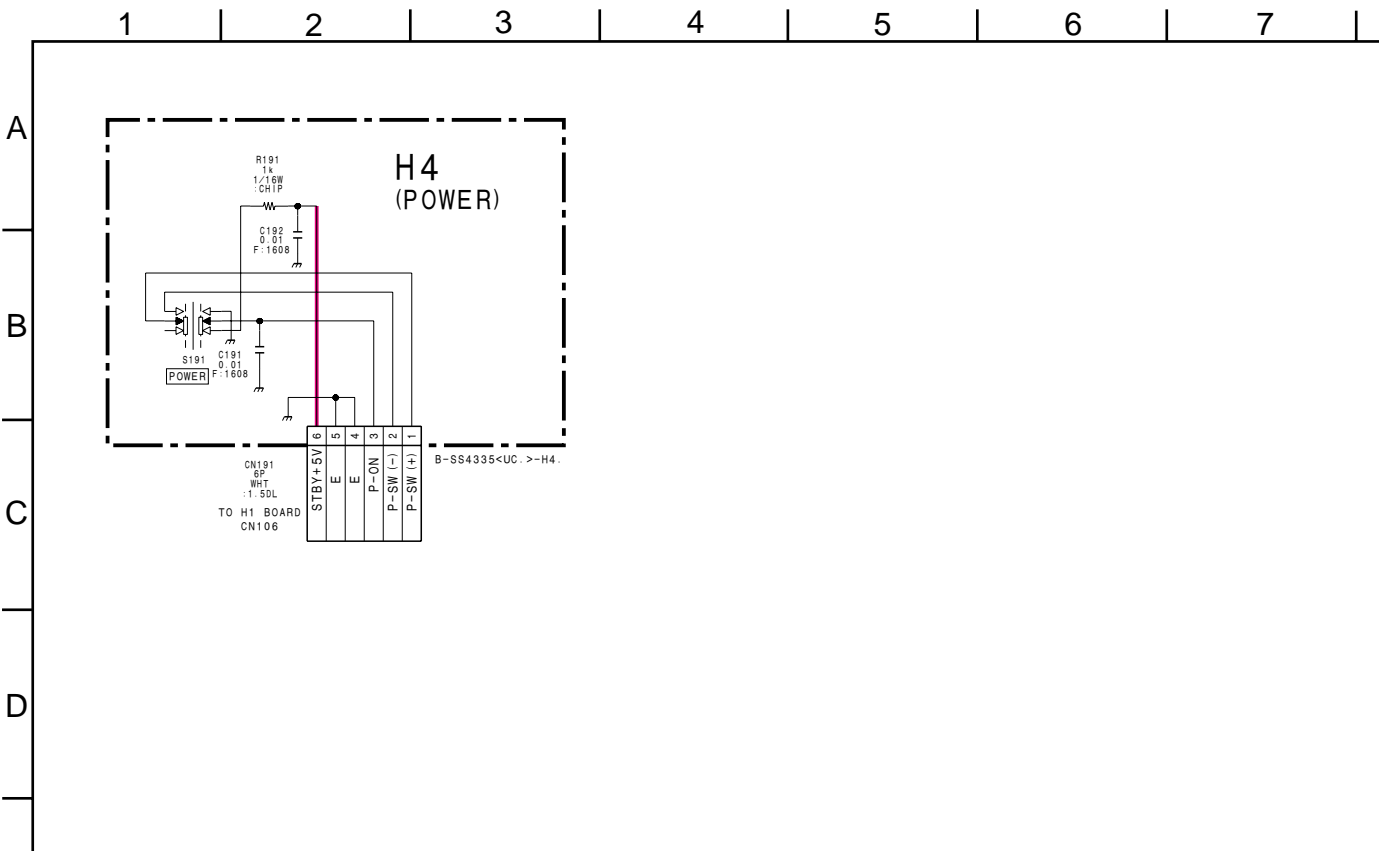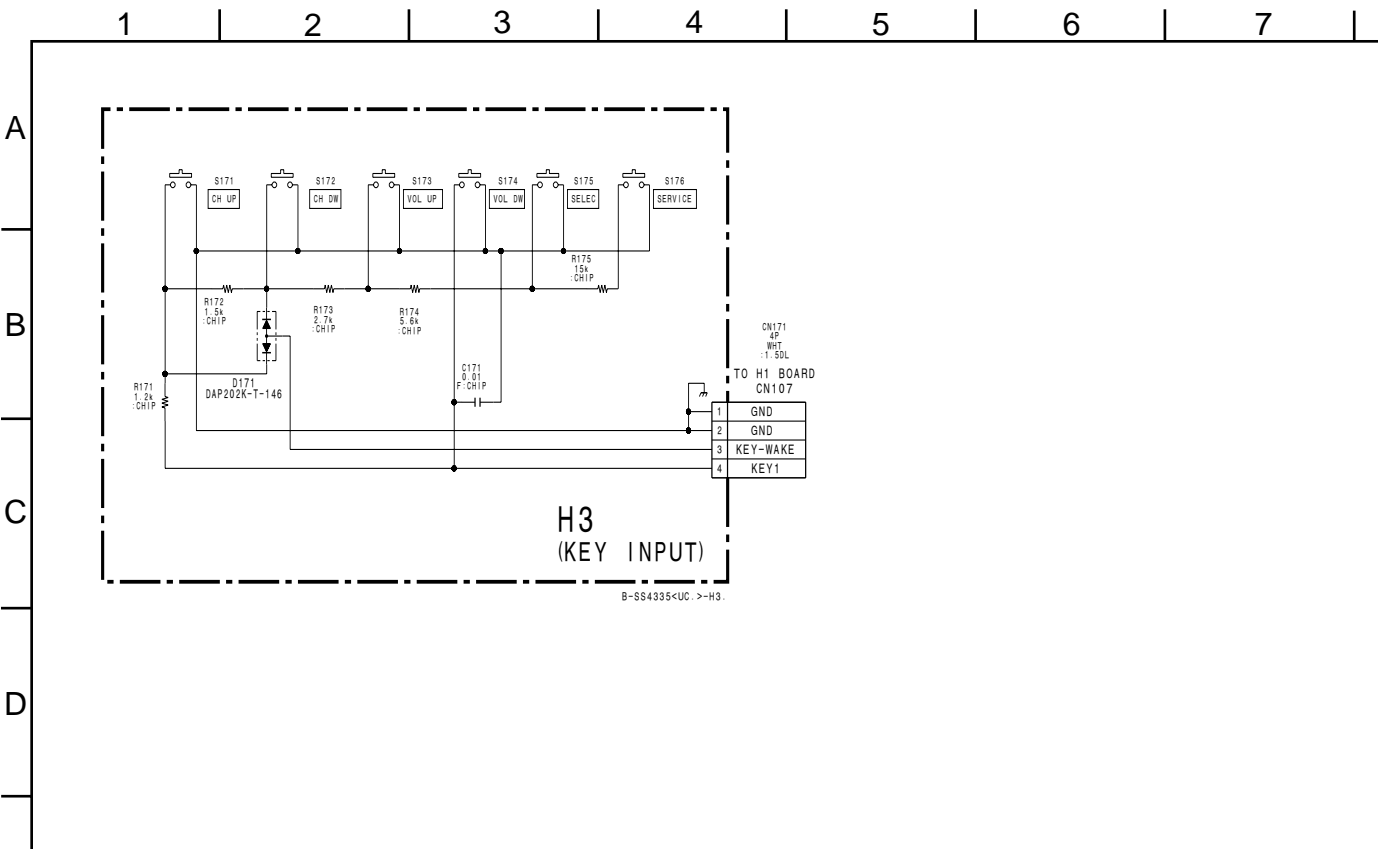


**H3** [ KEY INPUT ]

— H3 BOARD —

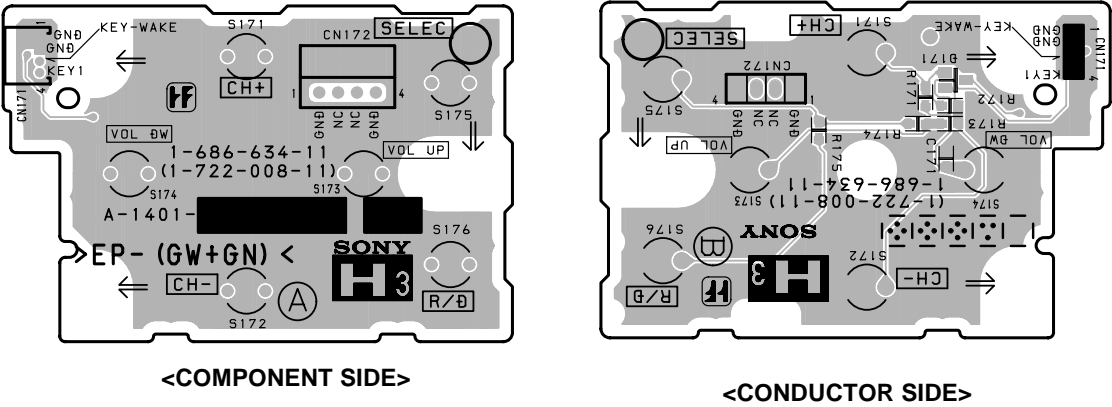

**H4** [ POWER ]

— H4 BOARD —

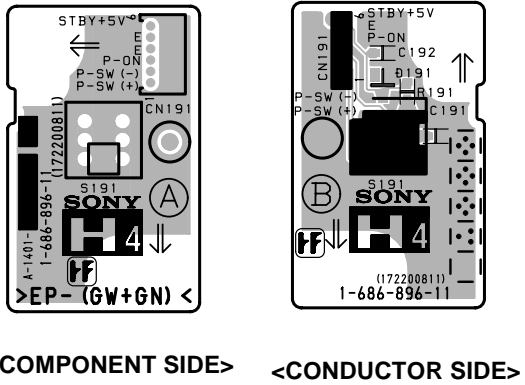


**H3 BOARD**  
Terminal name of semiconductors in  
silk screen printed circuit (\*)

| Ref. | * |
|------|---|
| D171 | ⑩ |


※: Refer to Terminal name of semiconductors  
in silk screen printed circuit (see page 4-18)

### (8) Schematic Diagram of IFA Board

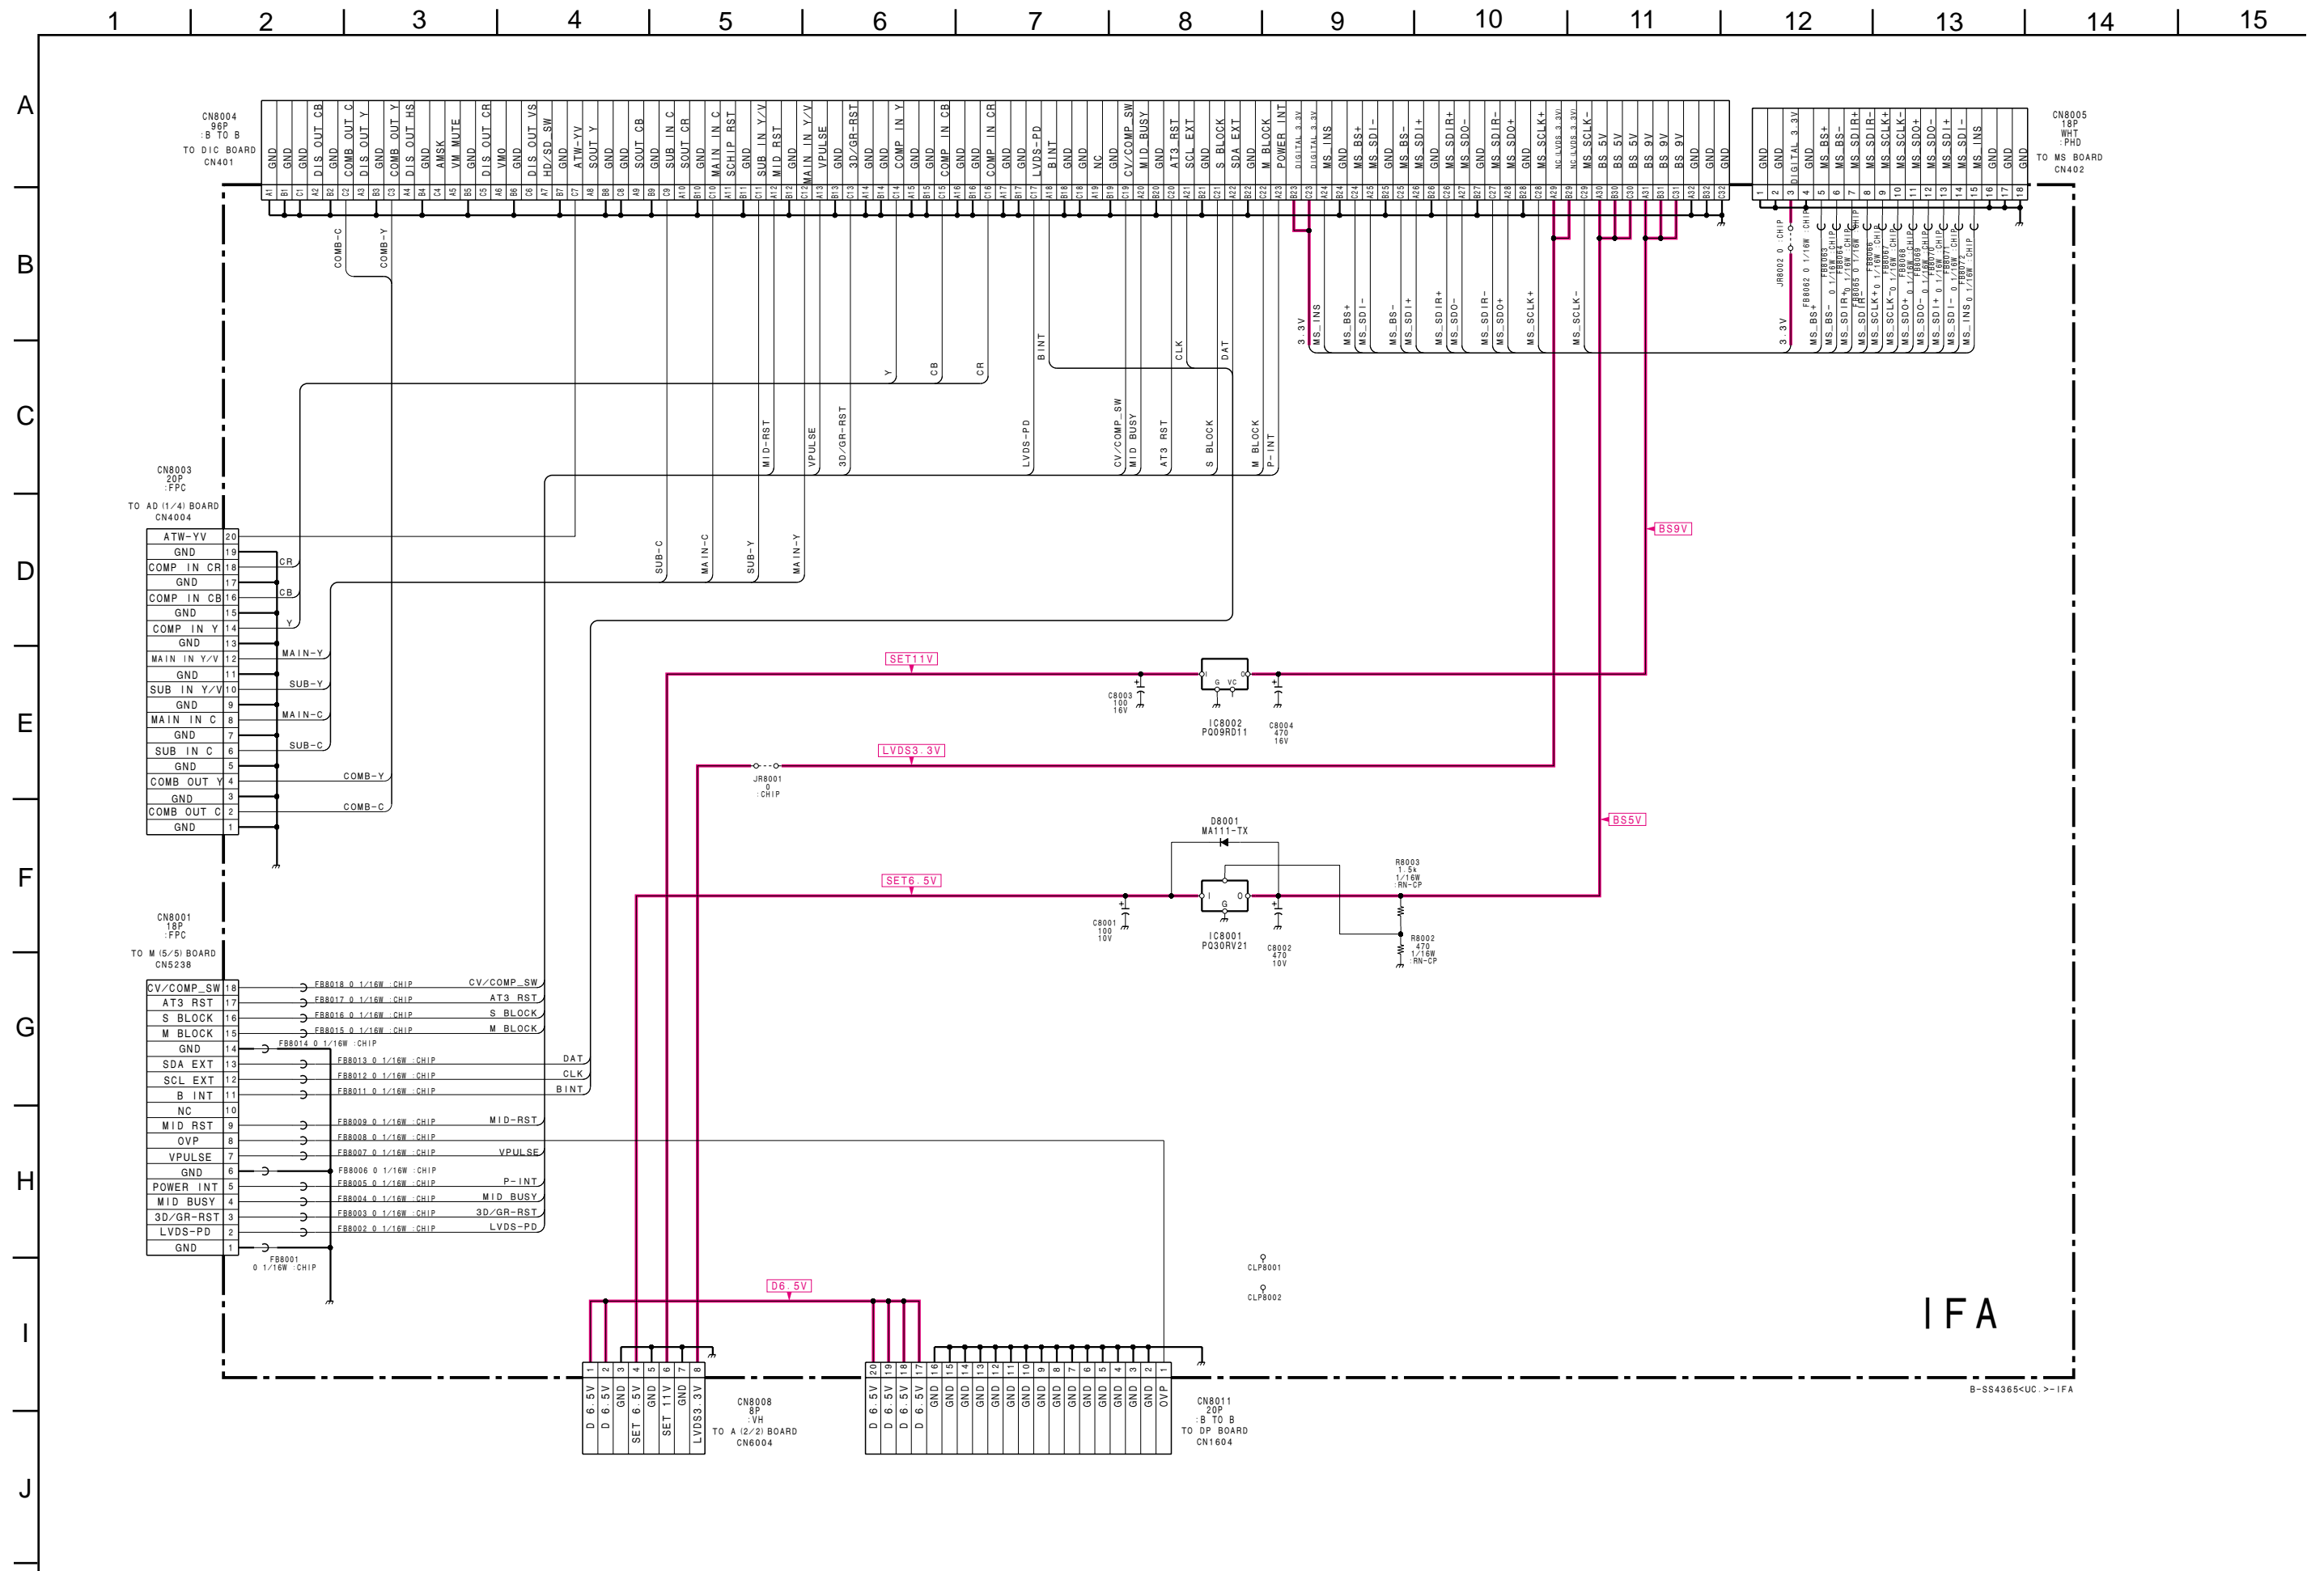




— IFA BOARD —

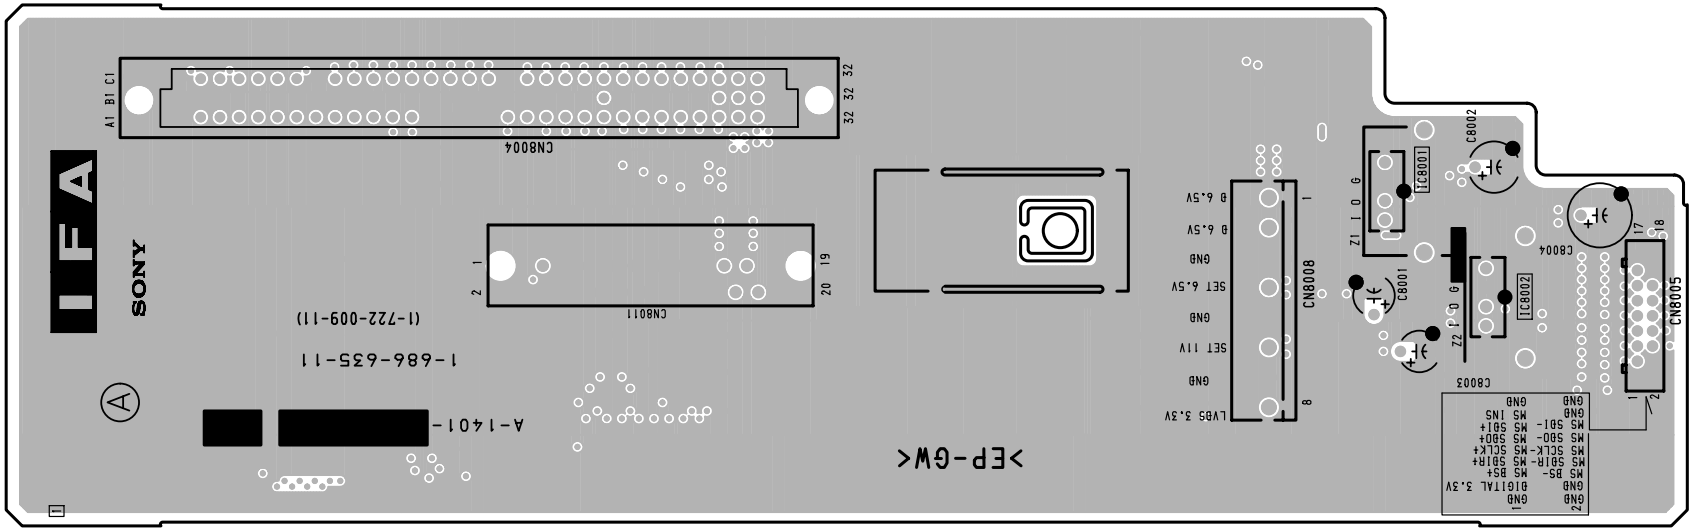


<COMPONENT SIDE>

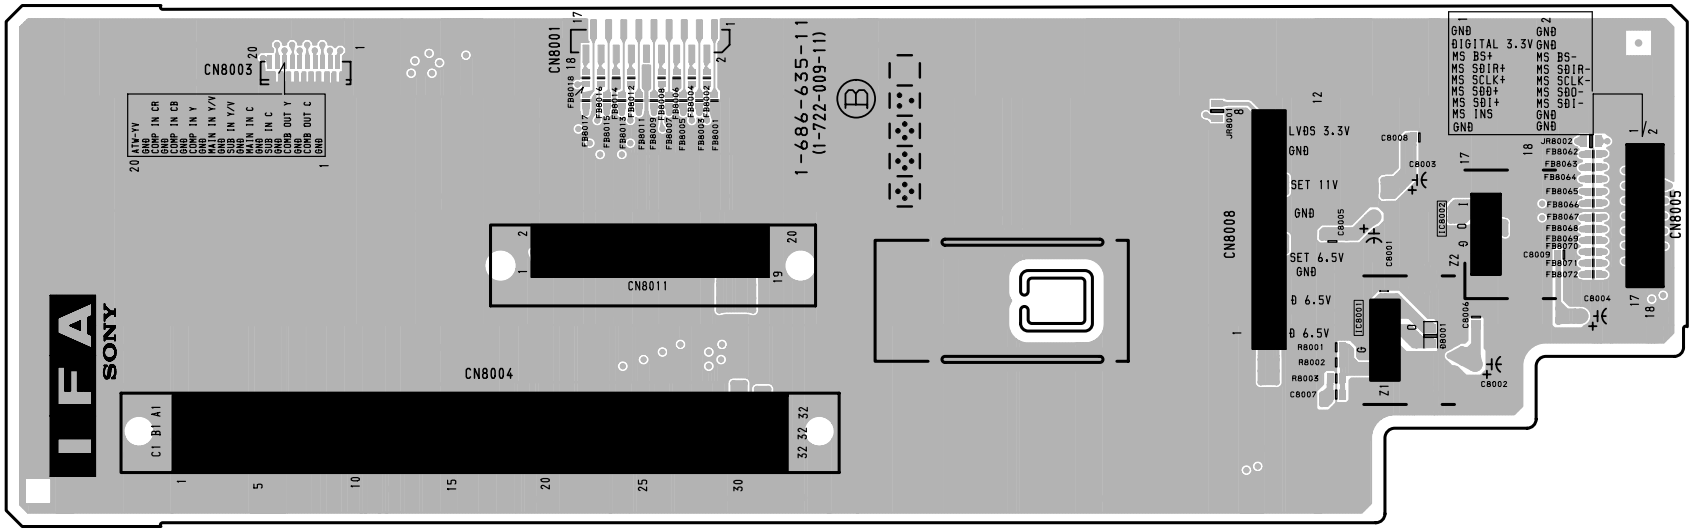


<CONDUCTOR SIDE>




### (9) Schematic Diagrams of M Board

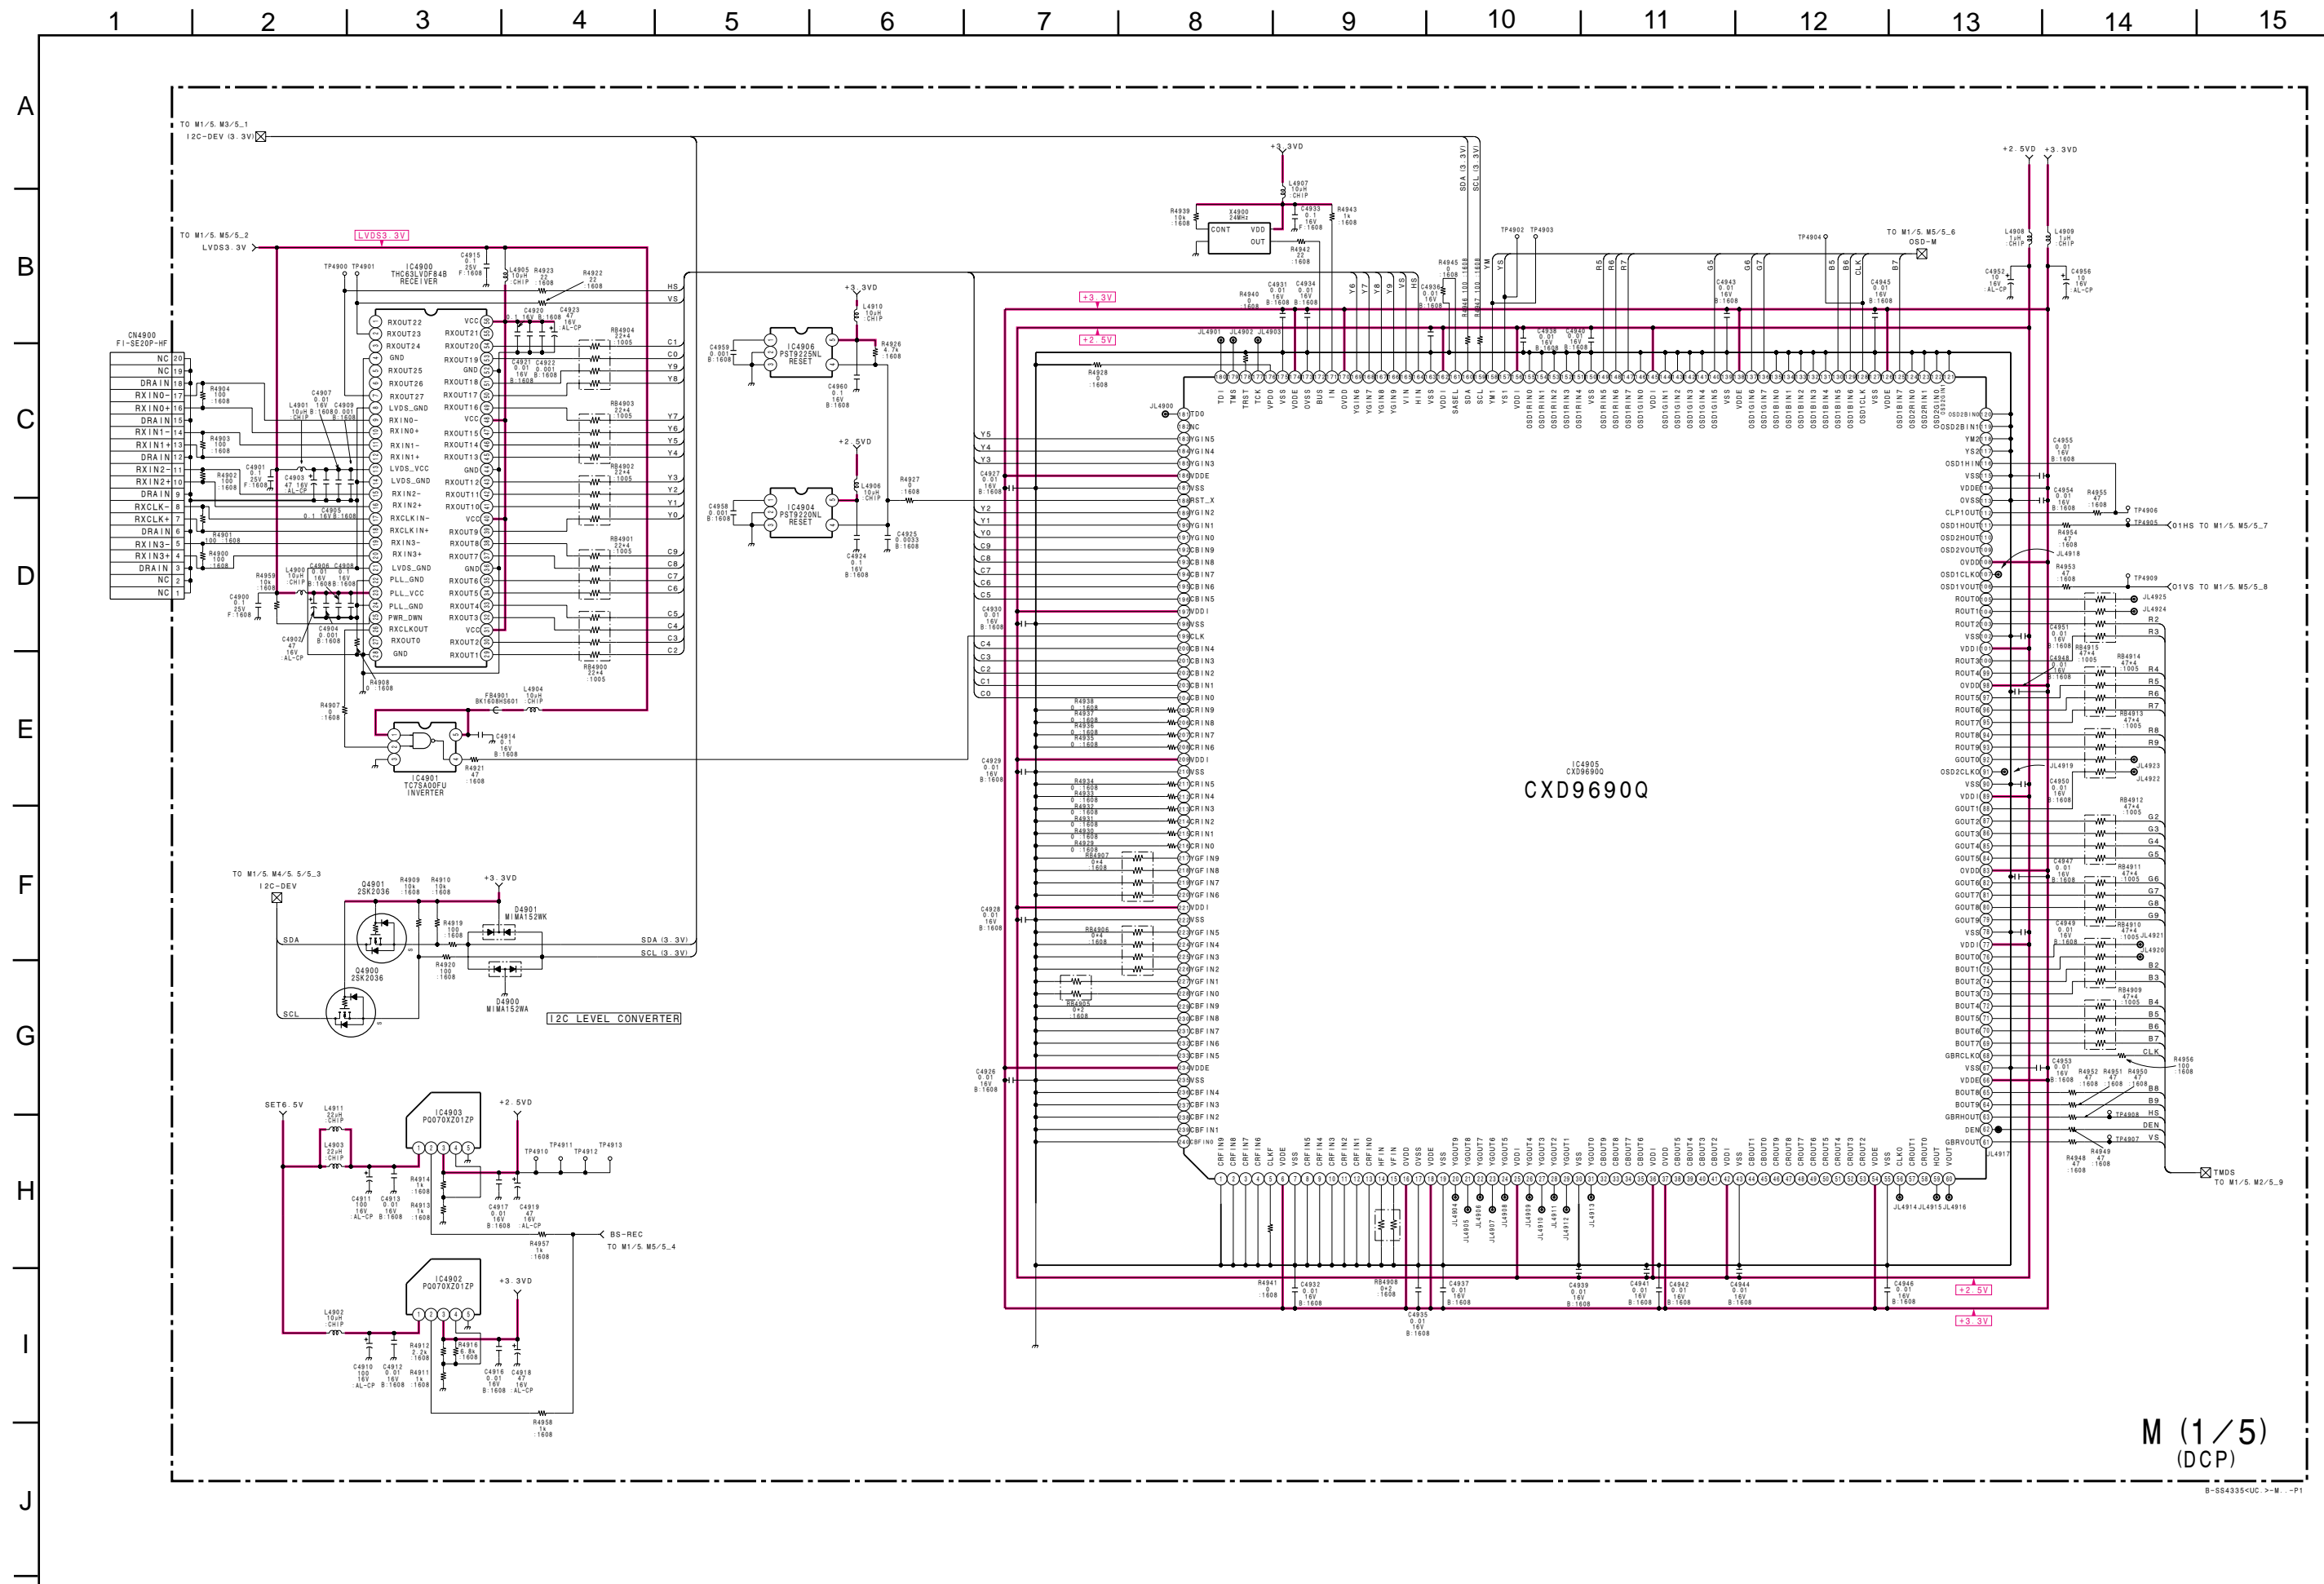

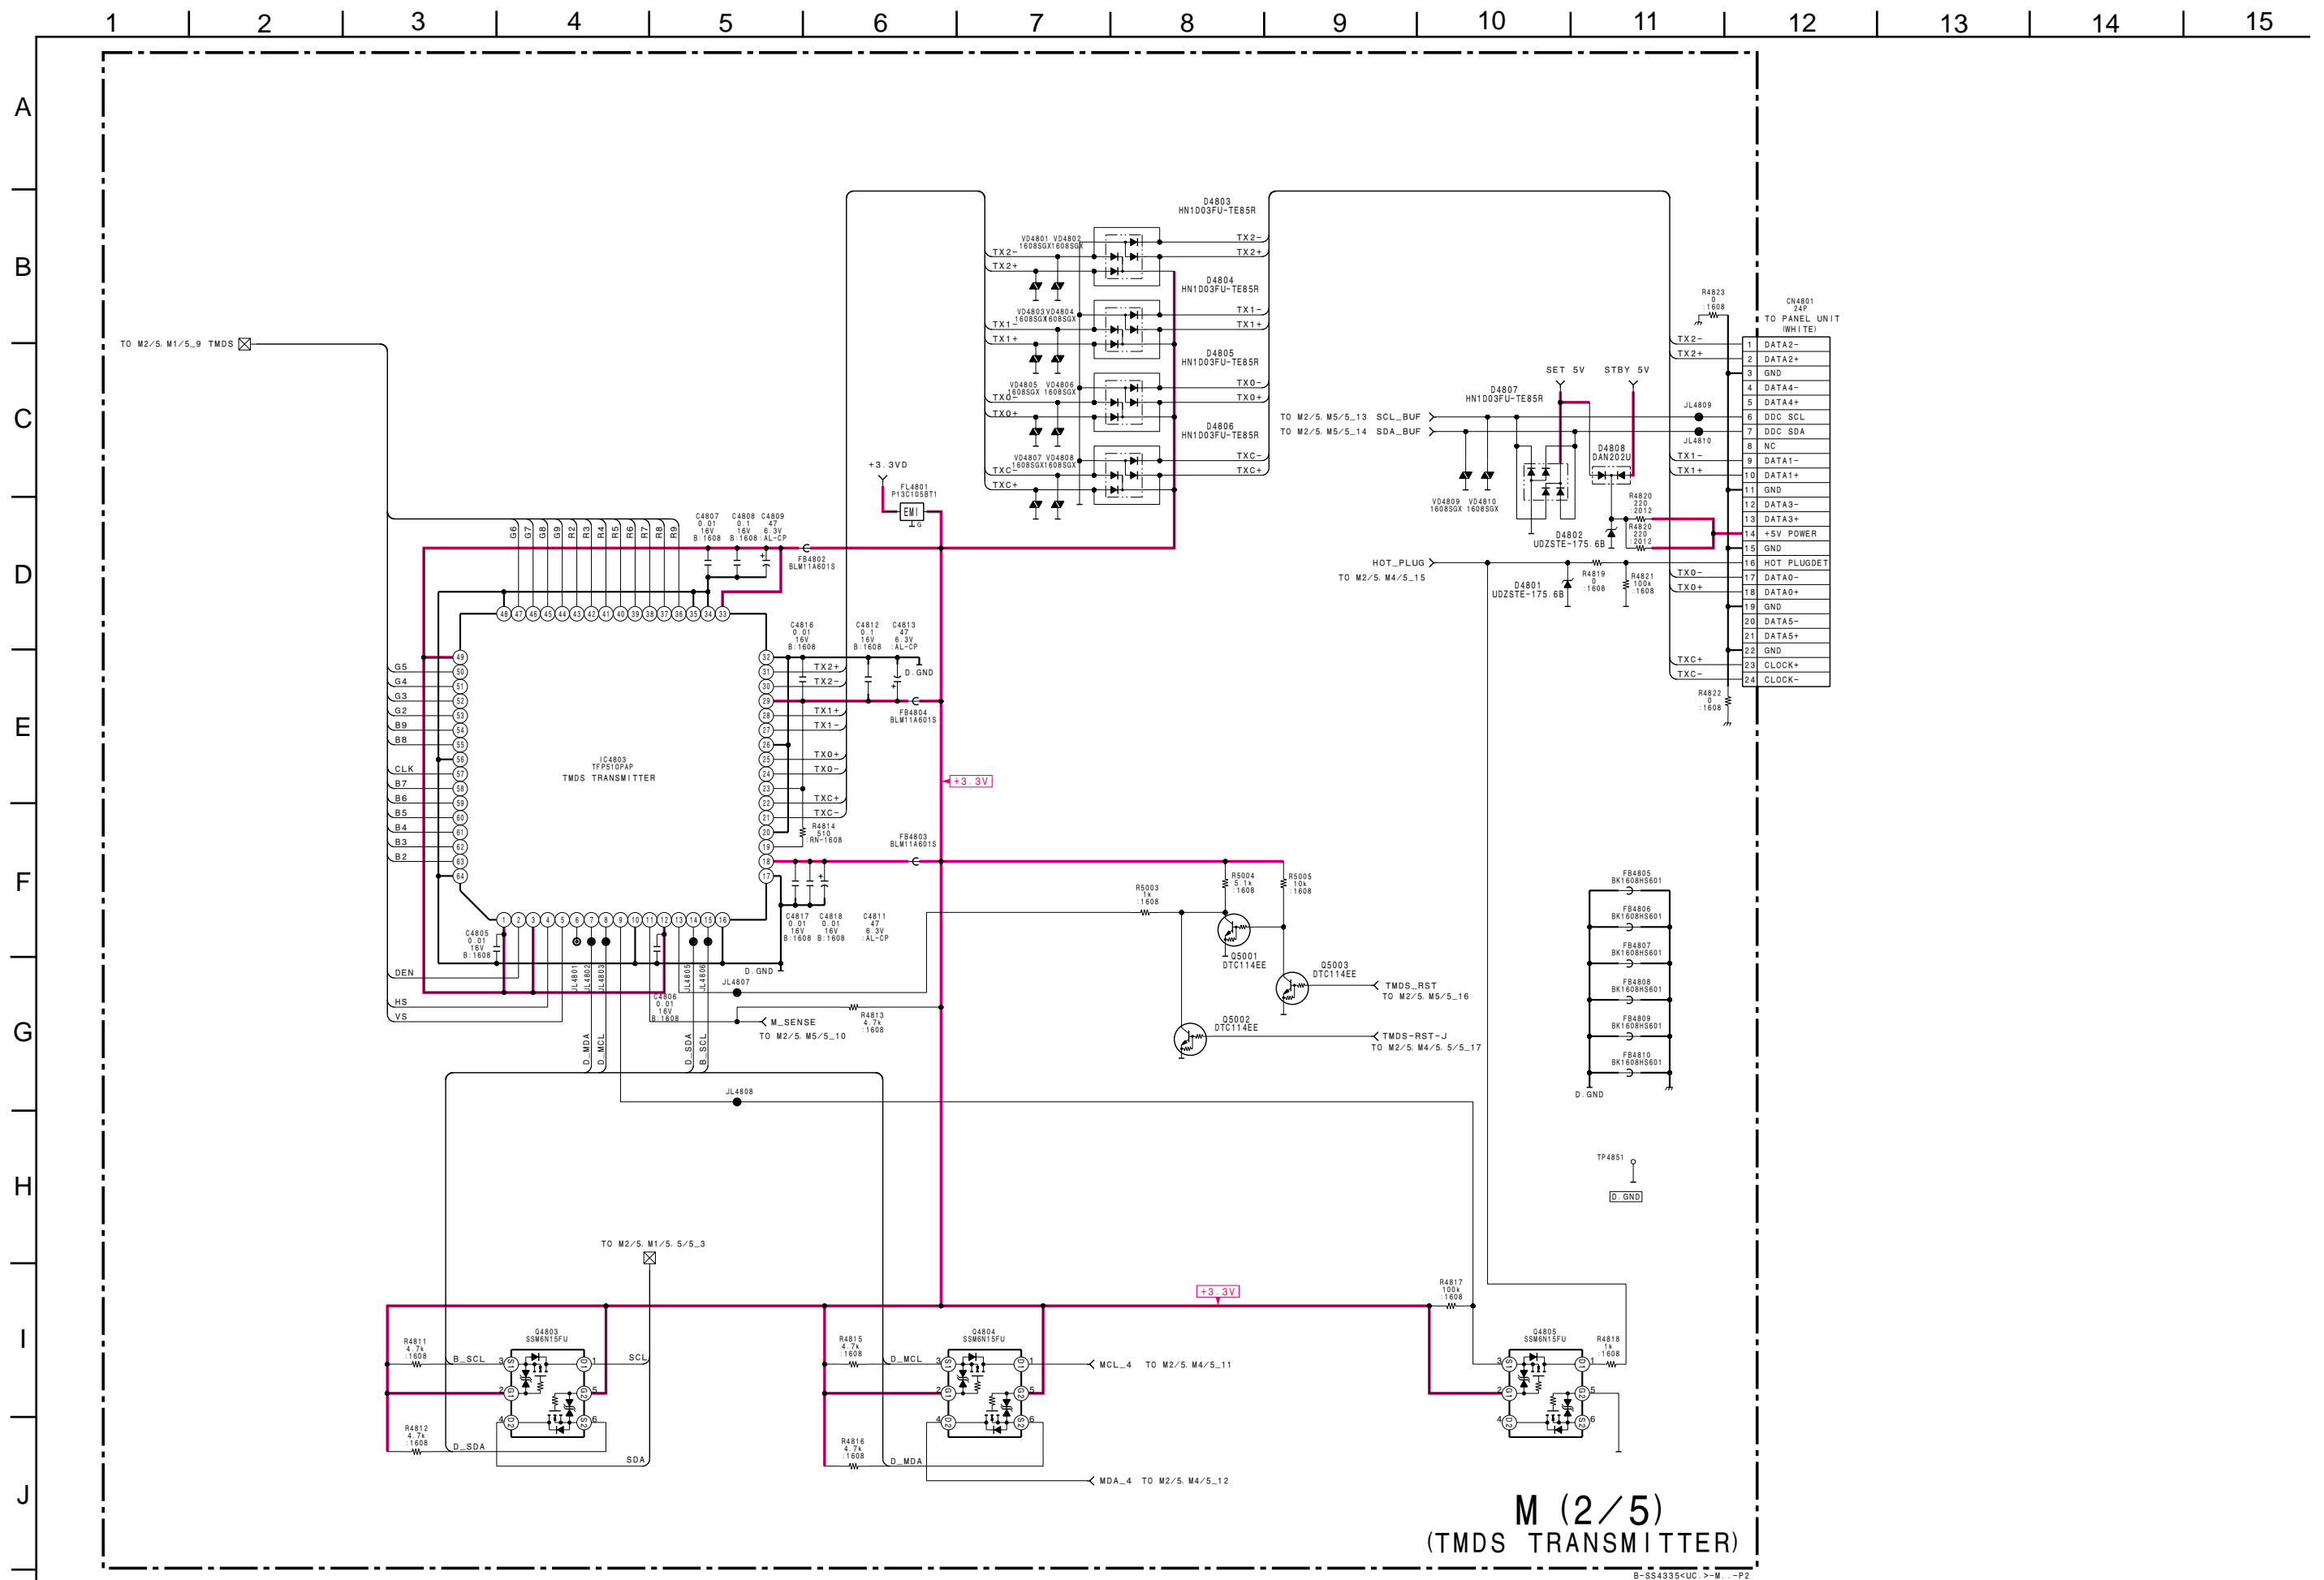



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15


A  
B  
C  
D  
E  
F  
G  
H  
I  
J

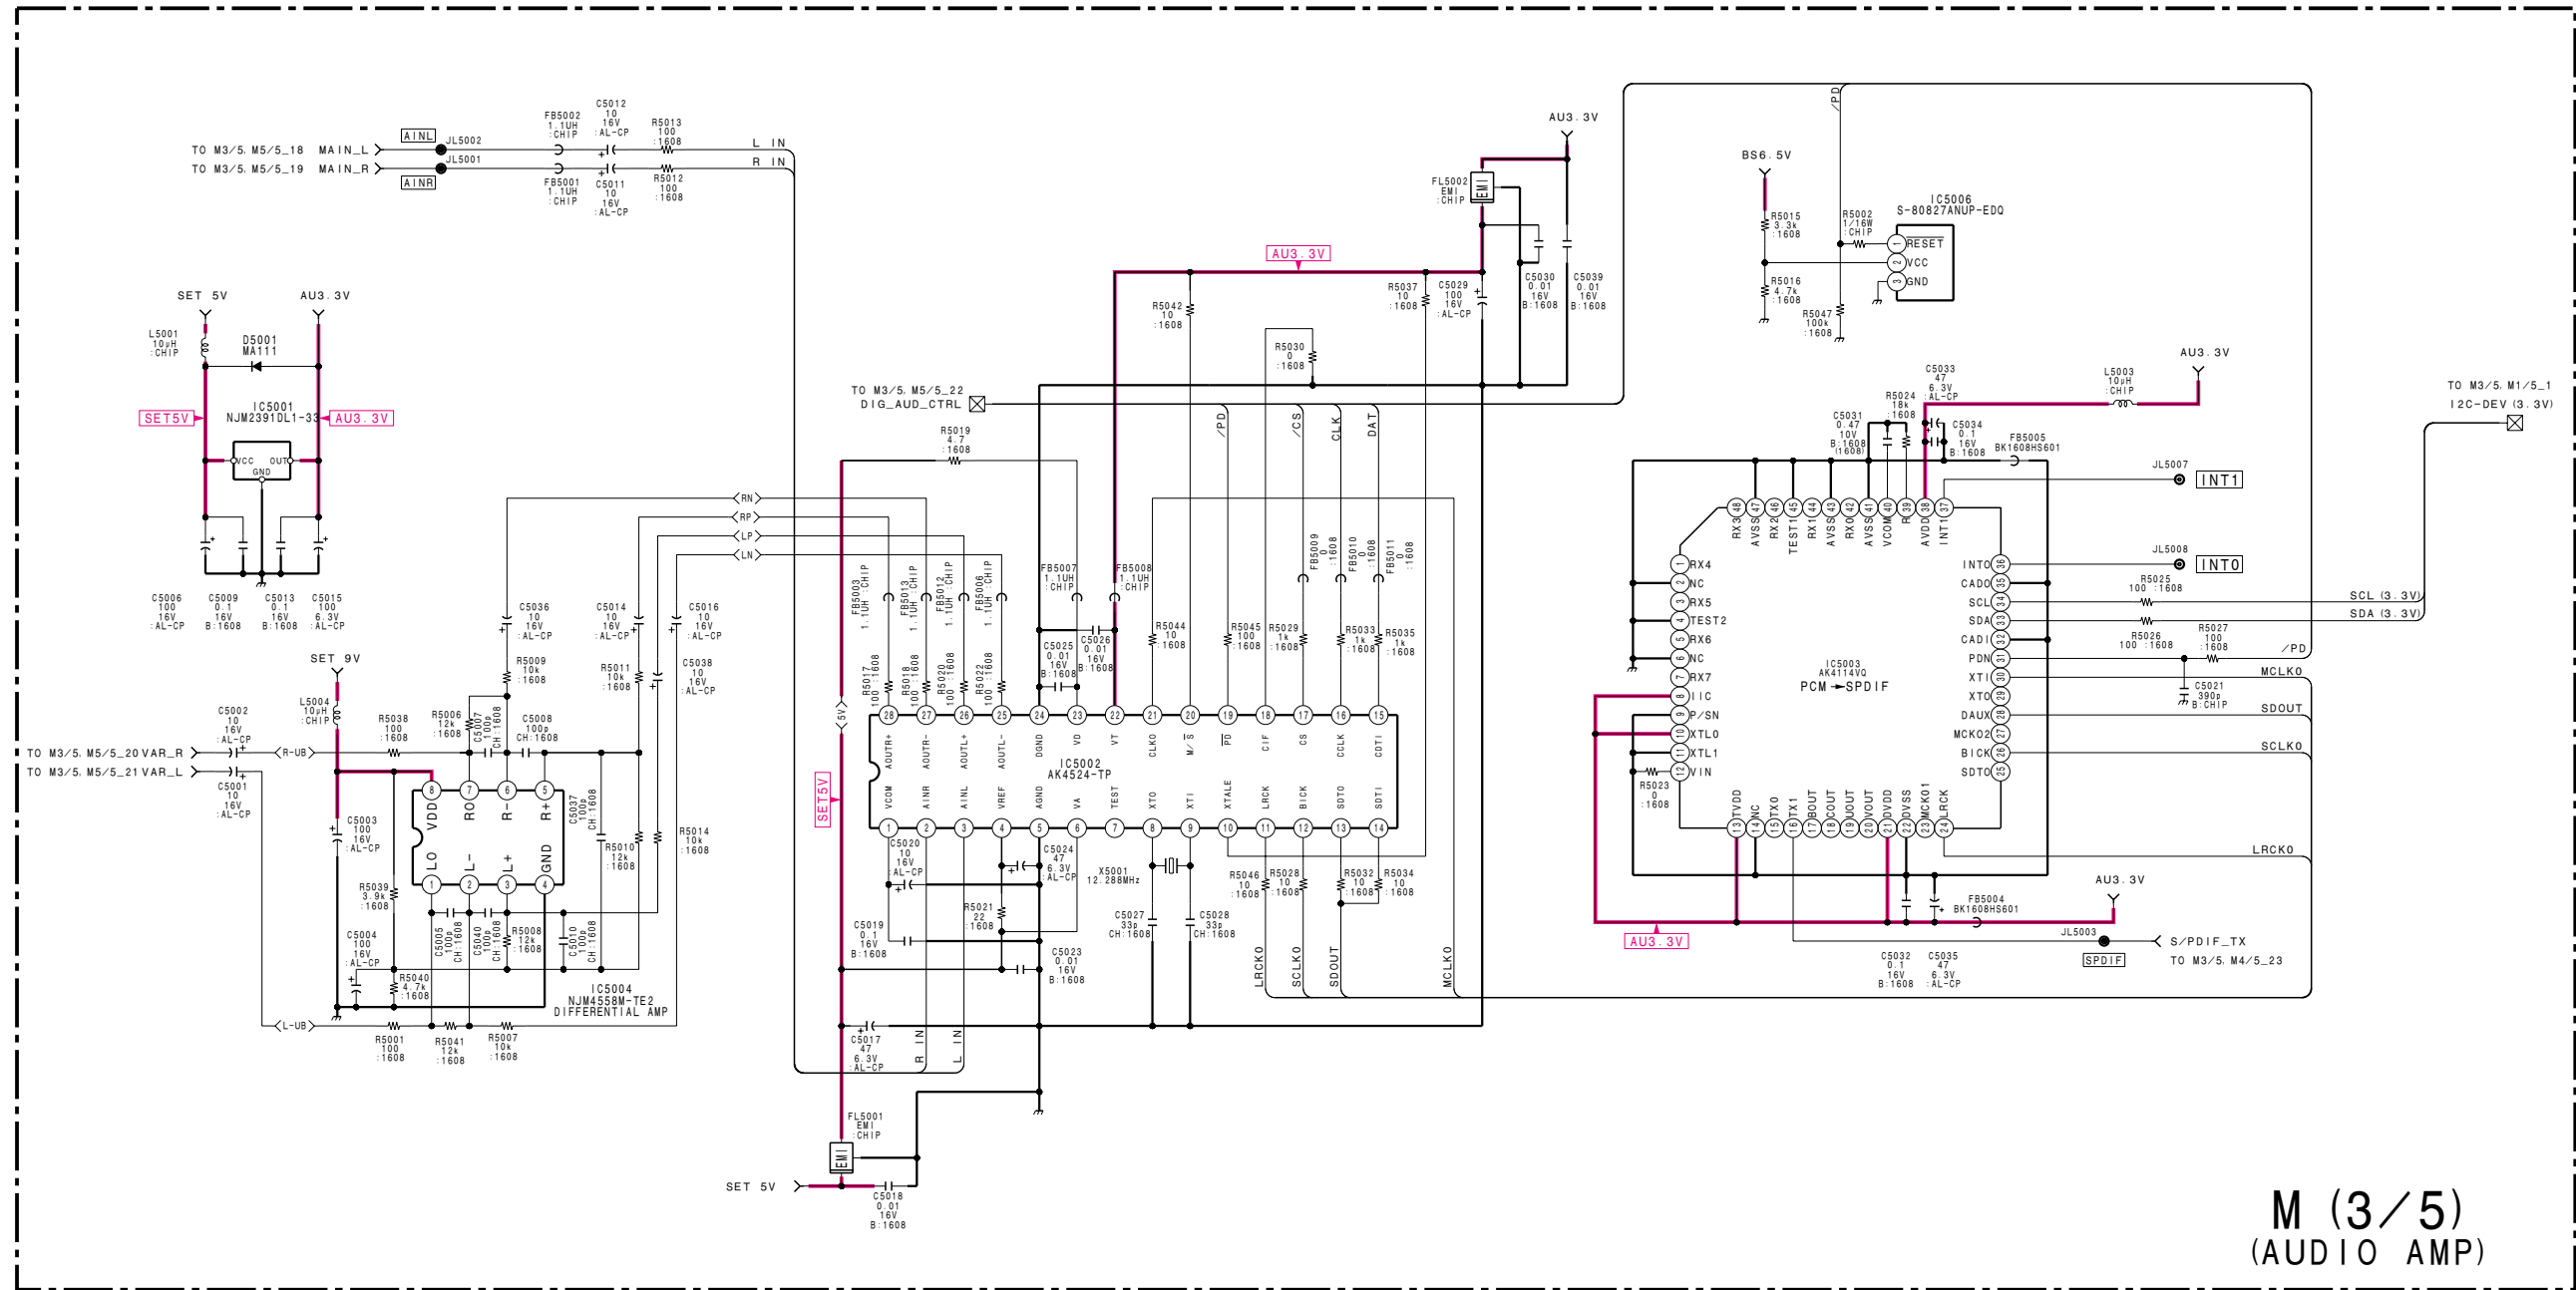


B-SS4335mUC. >-M. -P3





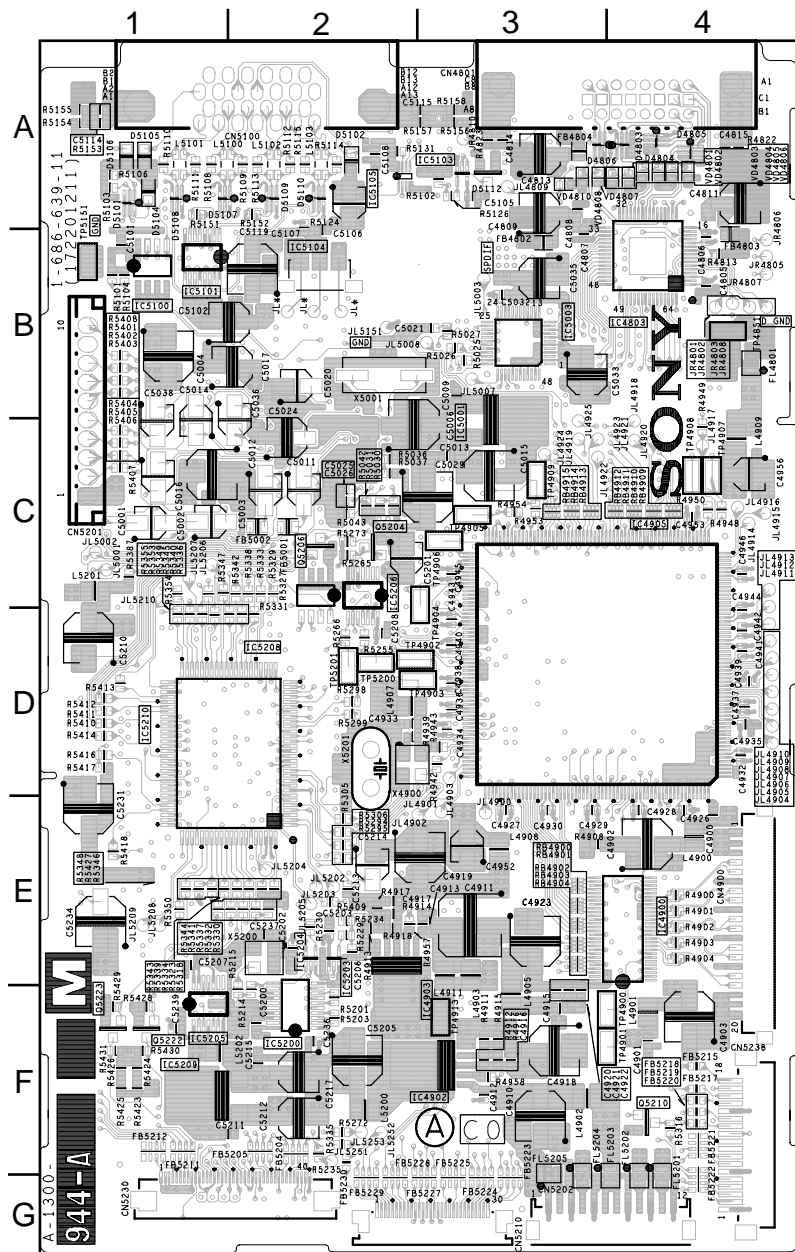


<CONDUCTOR SIDE>

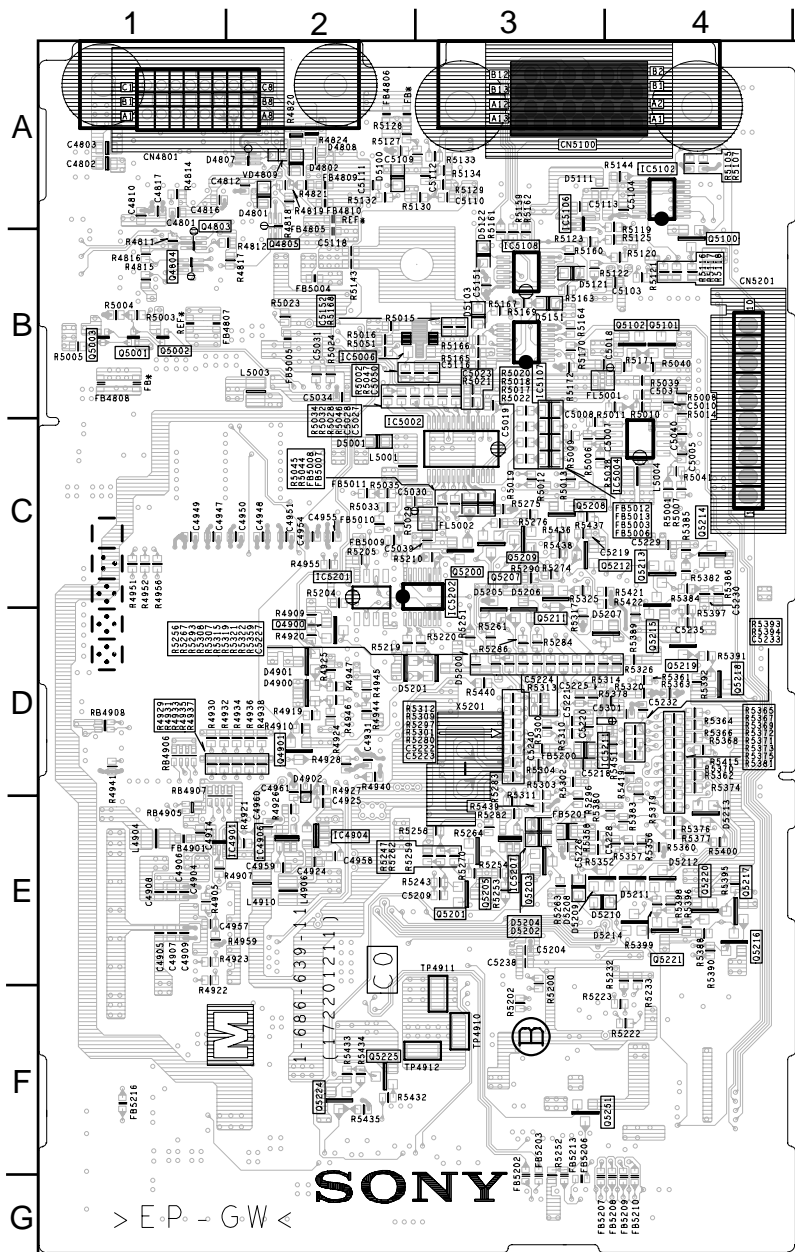

<COMPONENT SIDE>



(10) Schematic Diagram of MS2 Board

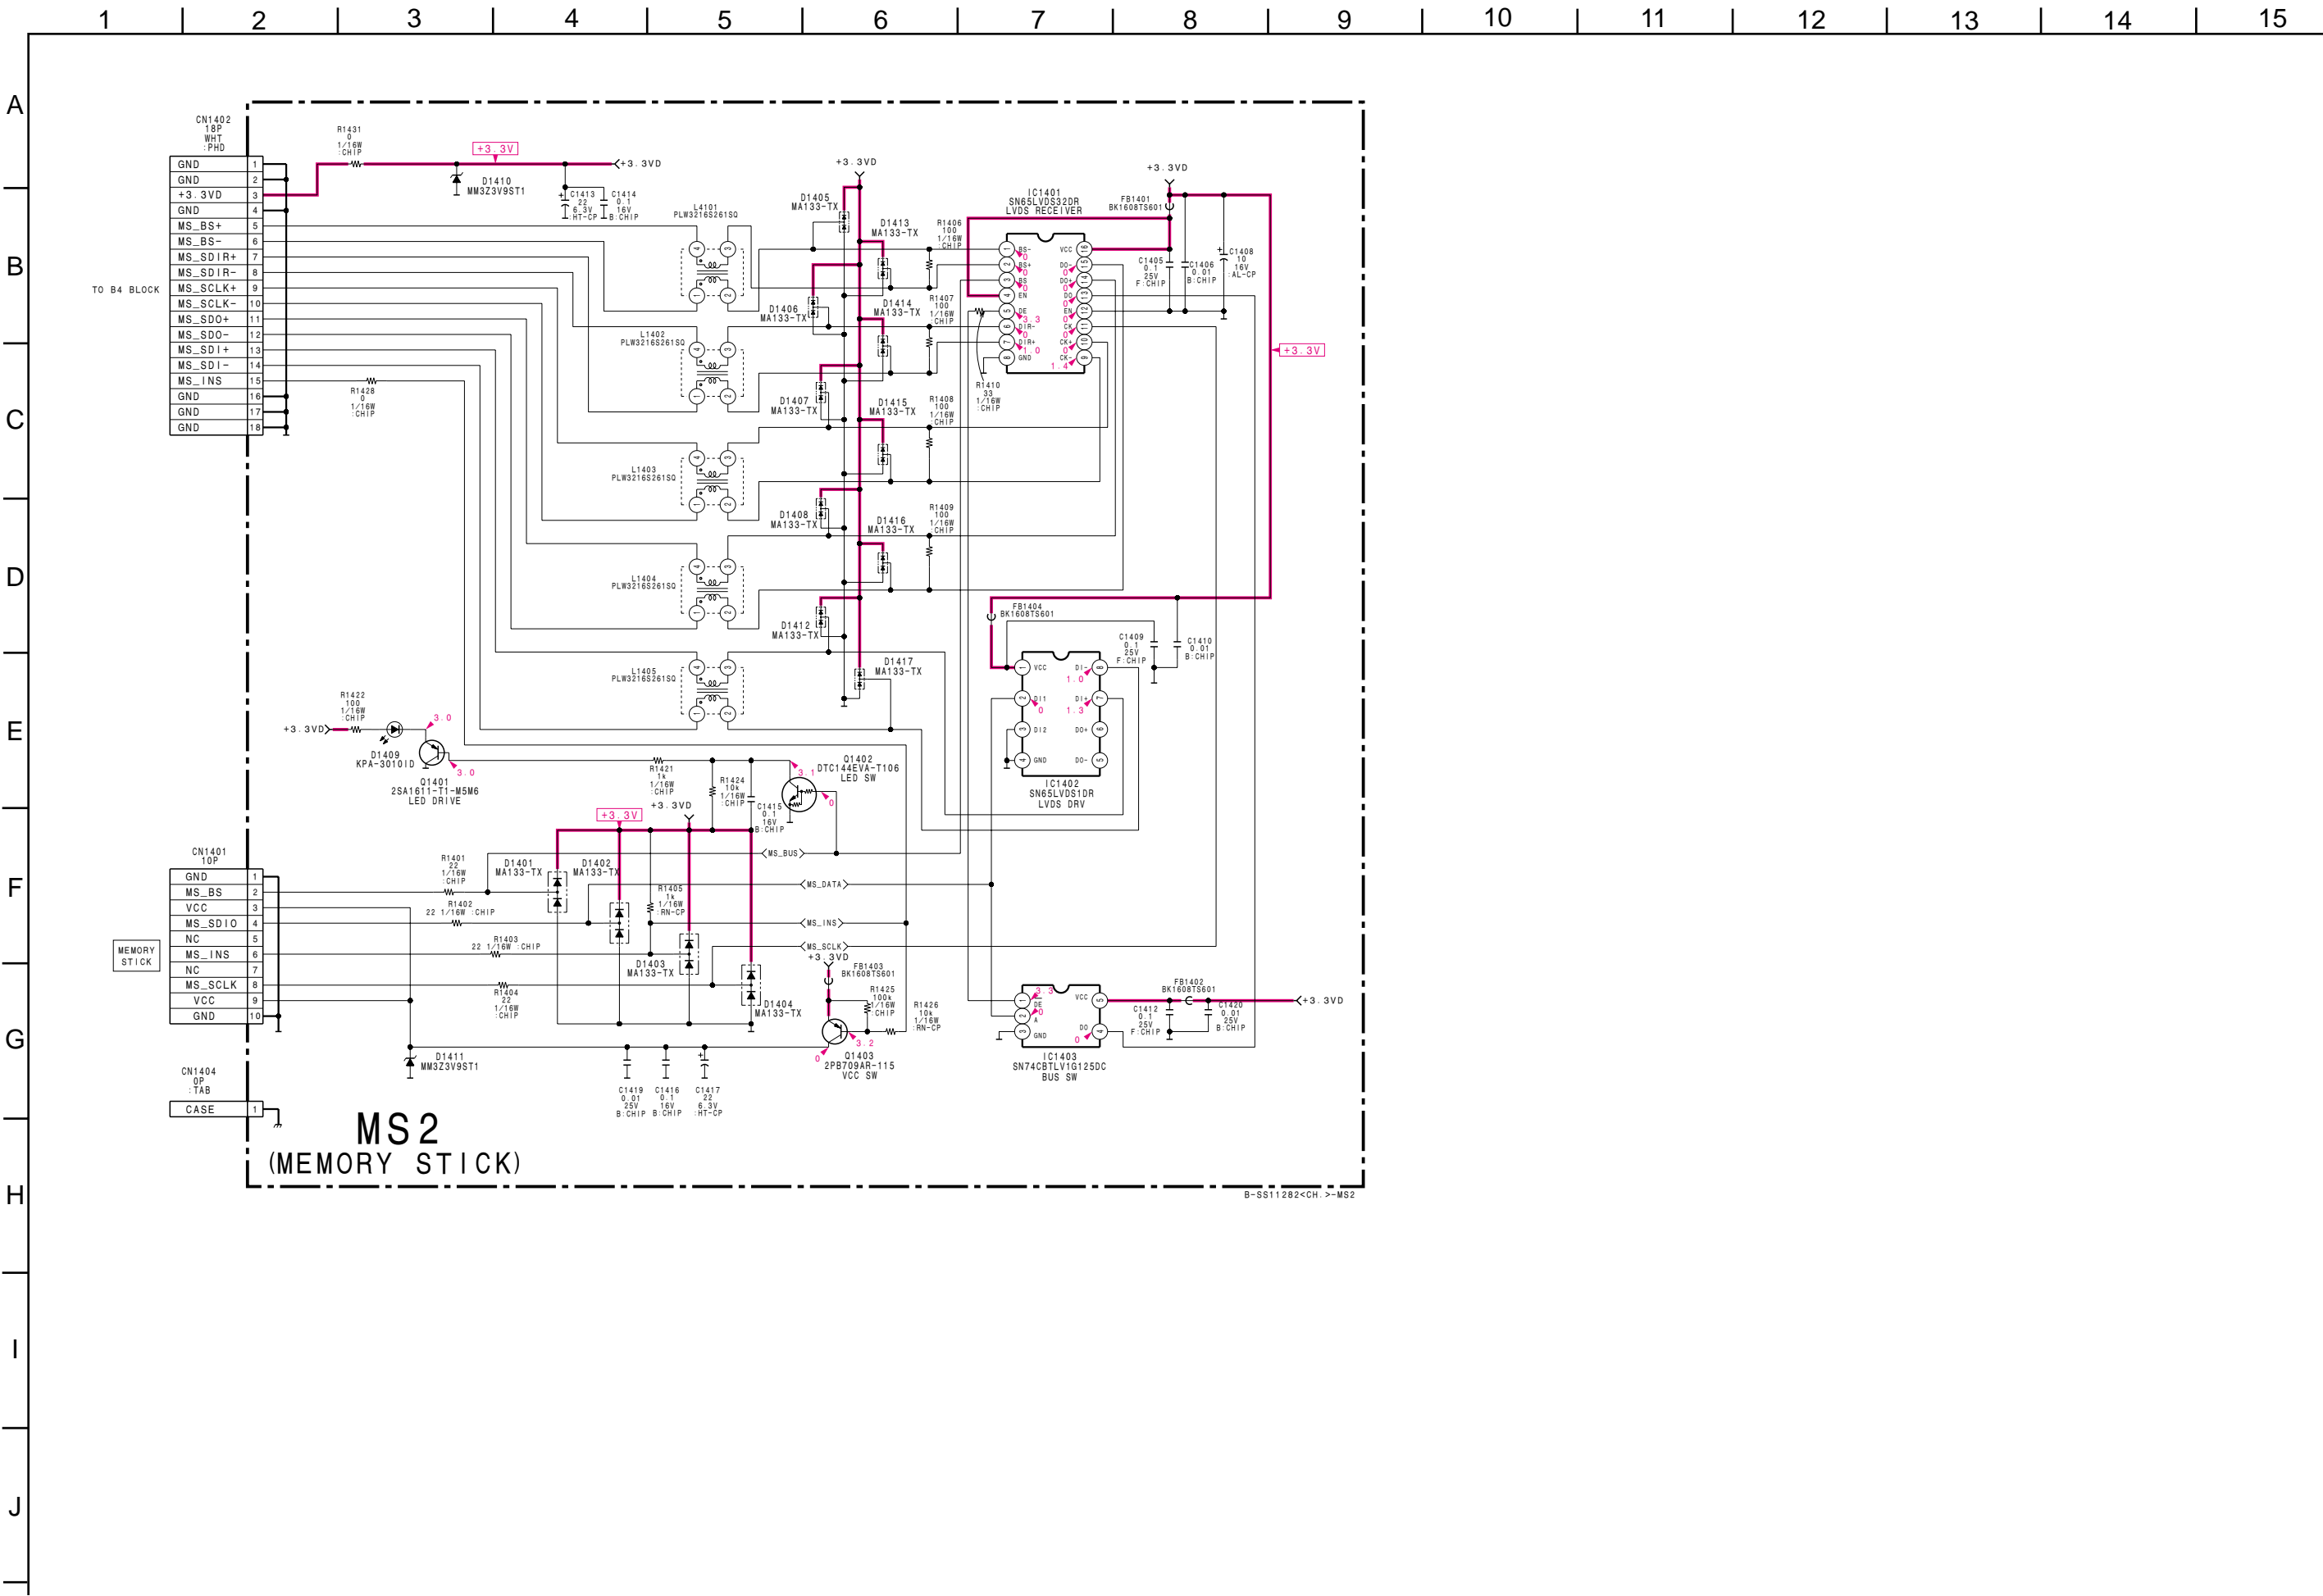




**Terminal name of semiconductors in  
silk screen printed circuit (\*)**

| Ref.         | * |
|--------------|---|
| Q1401-Q1403  | ② |
| D1401-D1408  | ⑦ |
| D1412-D1417  |   |
| D1409        | - |
| D1410, D1411 | ③ |

**\*: Refer to Terminal name of semiconductors  
in silk screen printed circuit (see page 4-18)**




### (11) Schematic Diagram of U1 Board

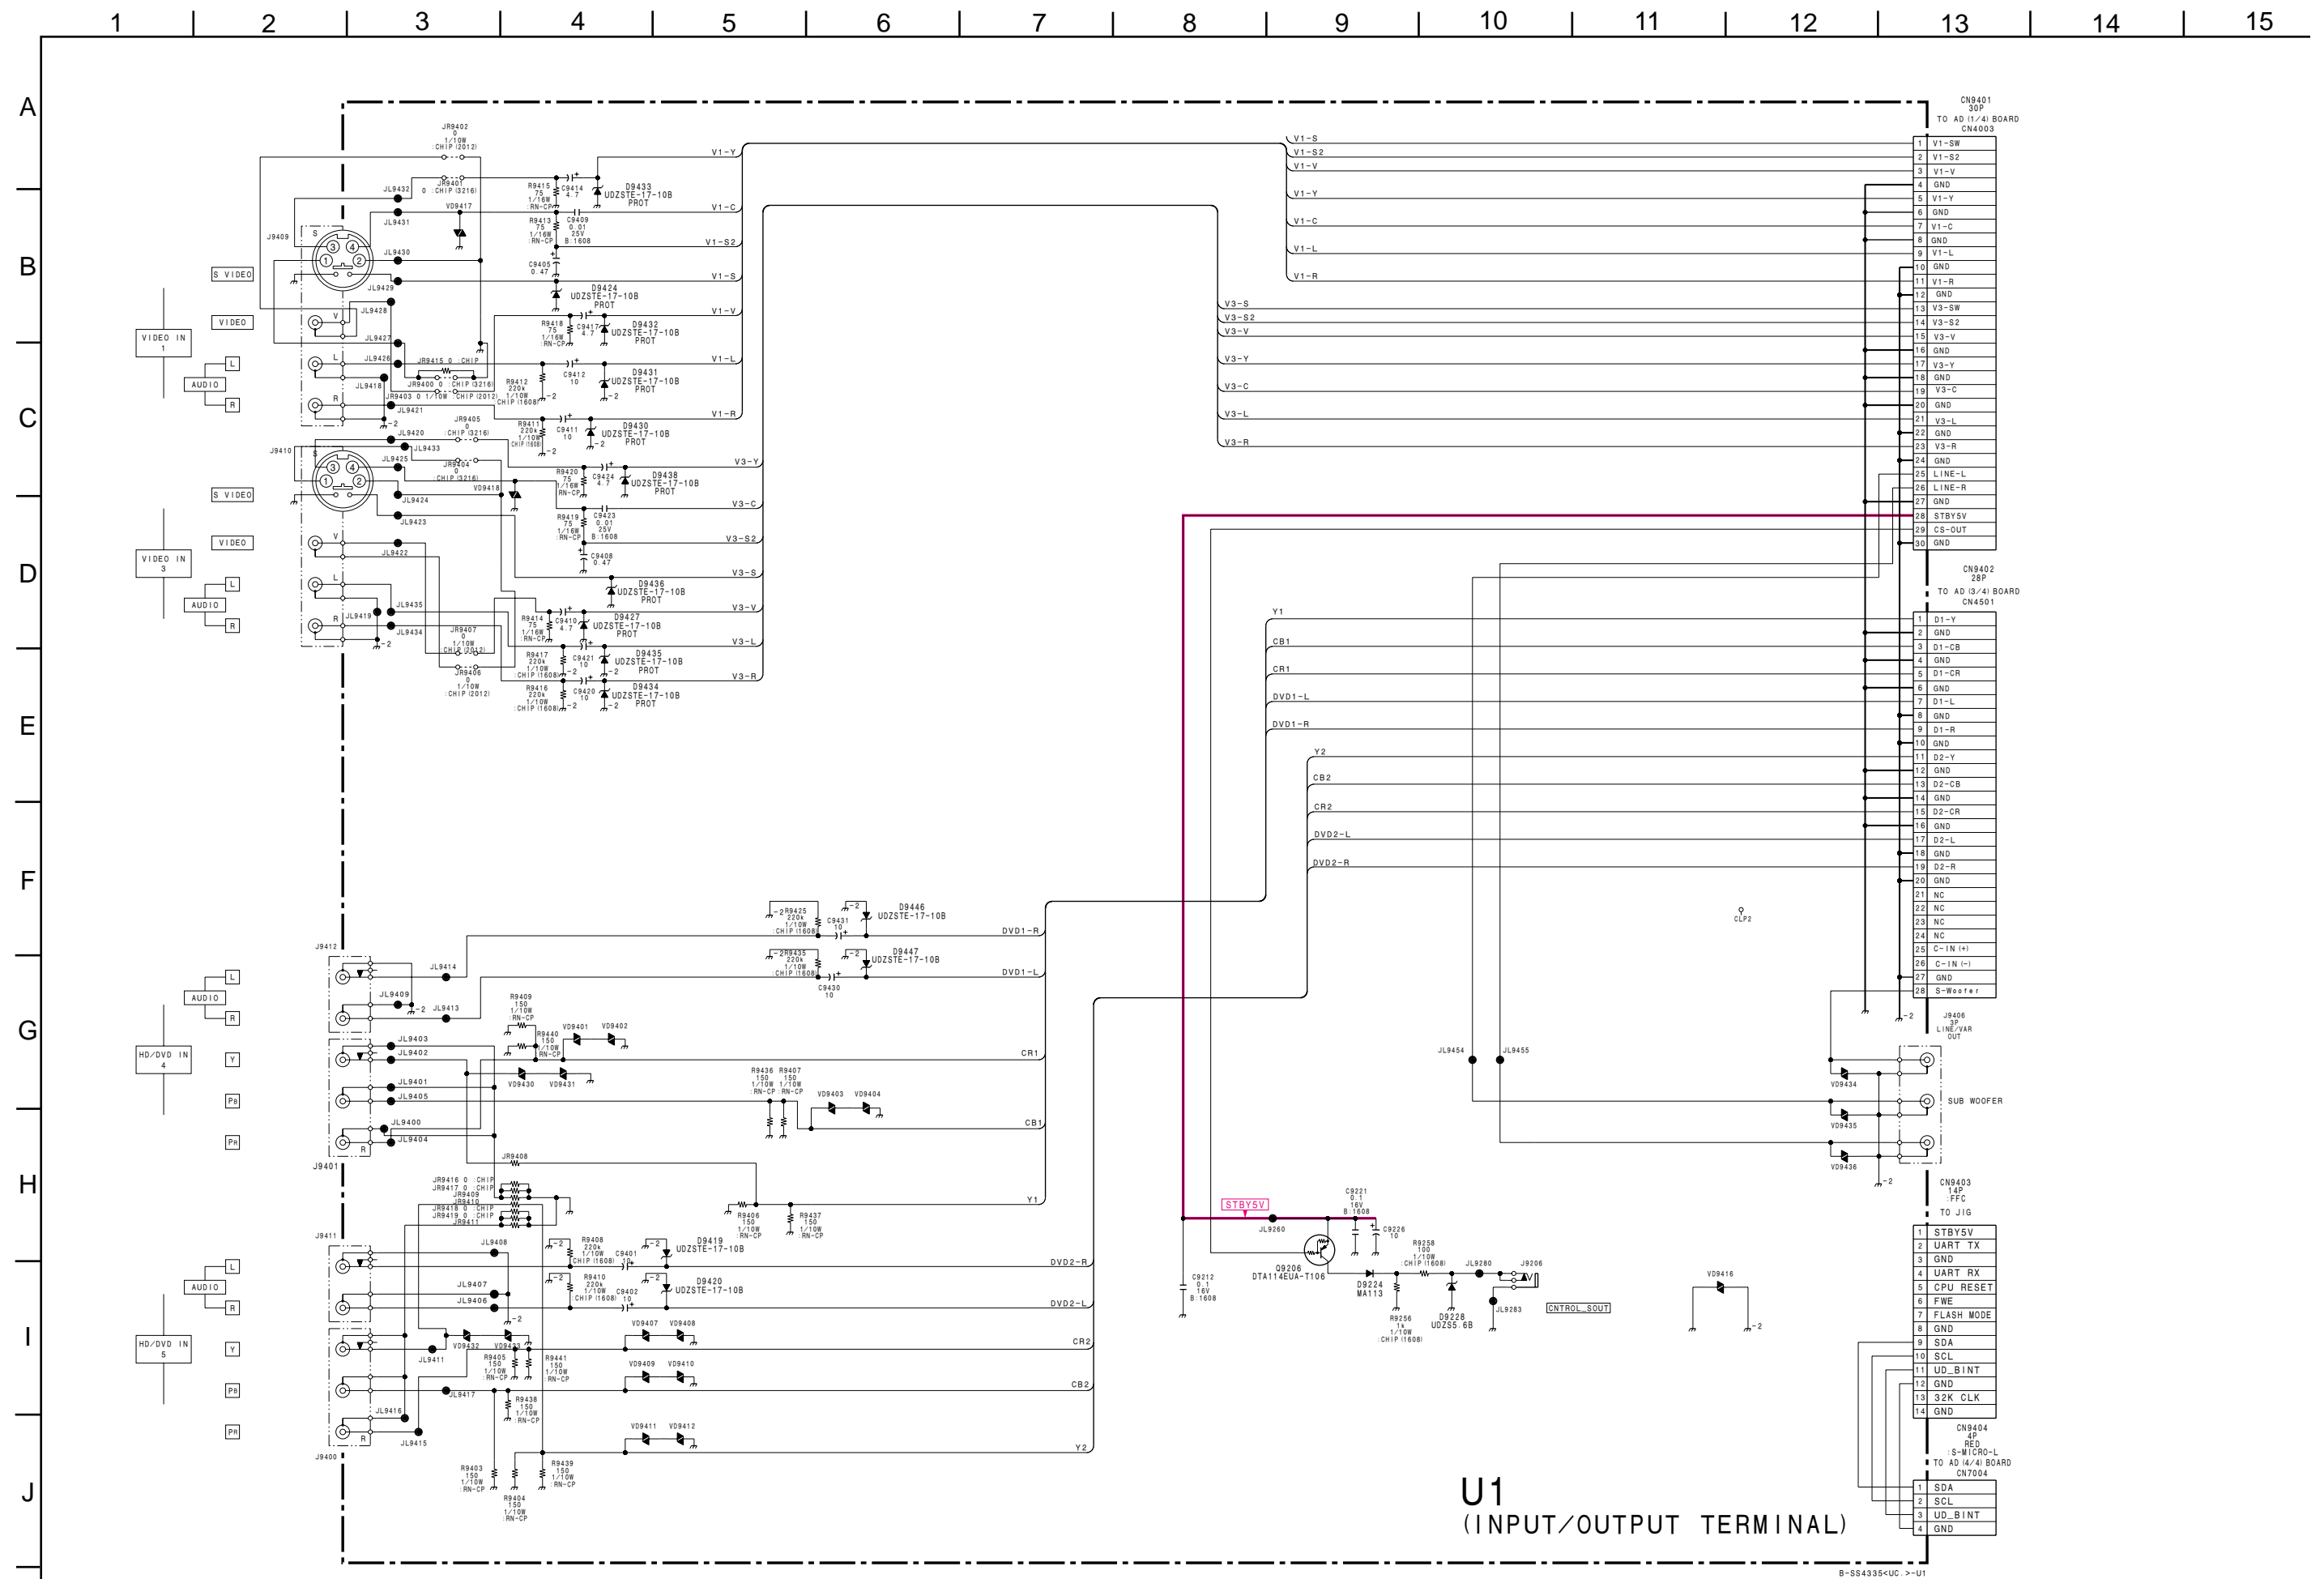


**U1** [ INPUT/OUTPUT TERMINAL ]

— U1 BOARD —

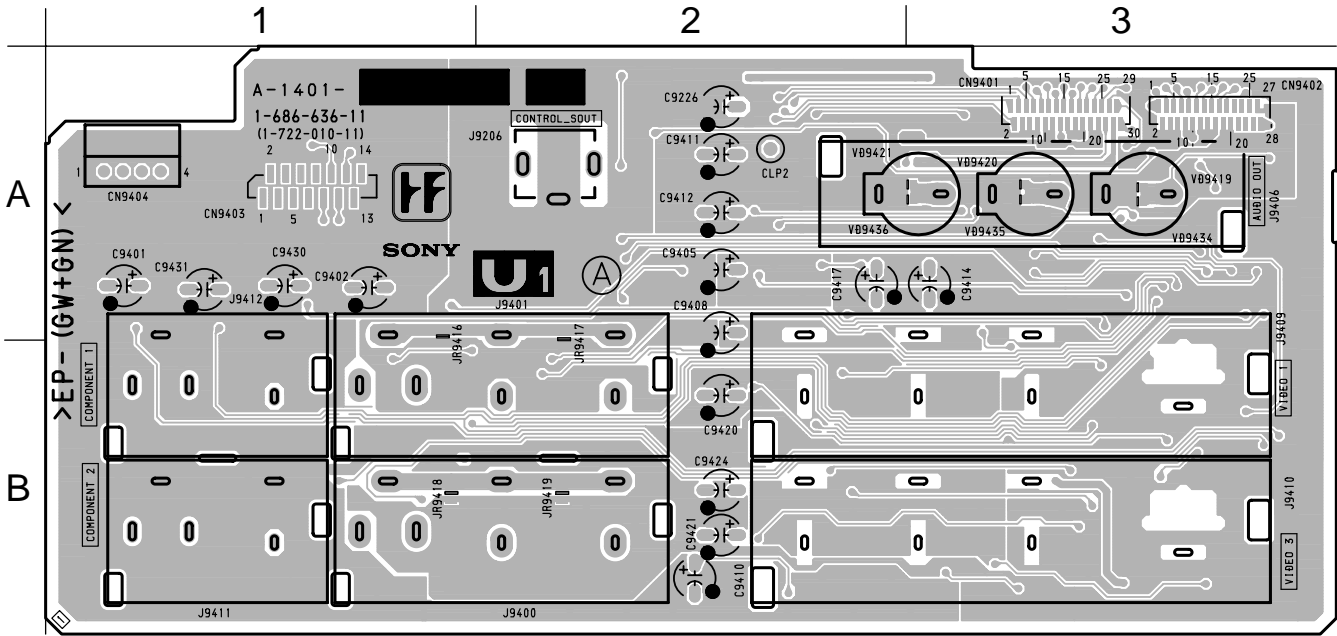

<COMPONENT SIDE>

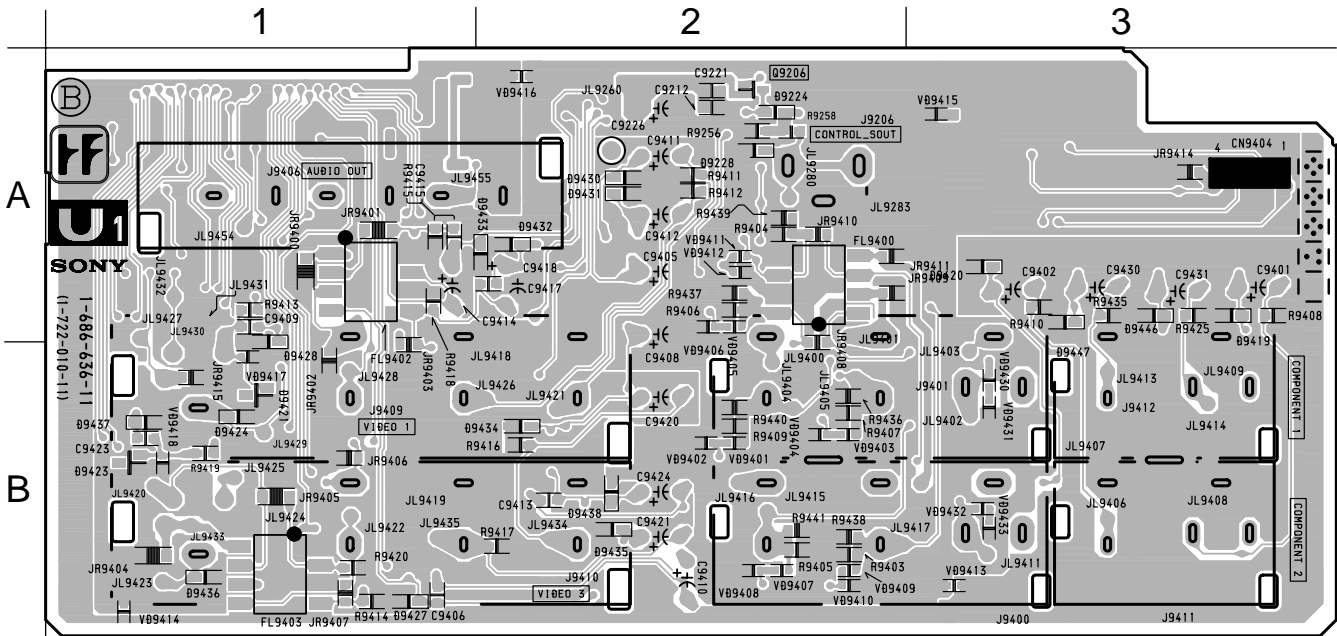

<CONDUCTOR SIDE>

• U1 BOARD SEMICONDUCTOR LOCATION

| TRANSISTOR       |                  |   |
|------------------|------------------|---|
| (COMPONENT SIDE) | (CONDUCTOR SIDE) | * |
| Q9206            | A-2              | ① |
| DIODE            |                  |   |
| (COMPONENT SIDE) | (CONDUCTOR SIDE) | * |
| D9224            | A-2              | ③ |
| D9228            | A-2              | ③ |
| D9419            | A-3              | ③ |
| D9420            | A-3              | ③ |
| D9424            | B-1              | ③ |
| D9427            | B-1              | ③ |
| D9430            | A-2              | ③ |
| D9431            | A-2              | ③ |
| D9432            | A-2              | ③ |
| D9433            | A-2              | ③ |
| D9434            | B-2              | ③ |
| D9435            | B-2              | ③ |
| D9436            | B-1              | ③ |
| D9438            | B-2              | ③ |
| D9446            | A-3              | ③ |
| D9447            | A-3              | ③ |


※: Refer Terminal name of semiconductors  
in silkscreen printed circuit (see page 4-18)

**U2** [ OUTPUT TERMINAL ]


**<CONDUCTOR SIDE>**





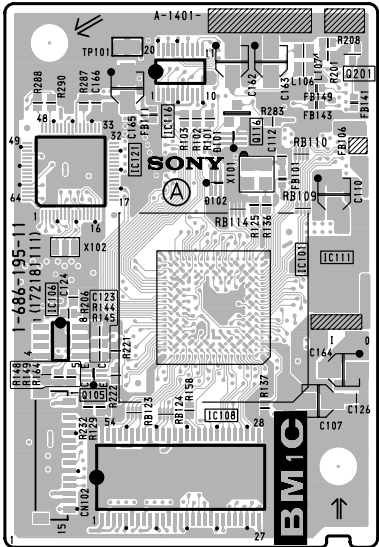

<COMPONENT SIDE>

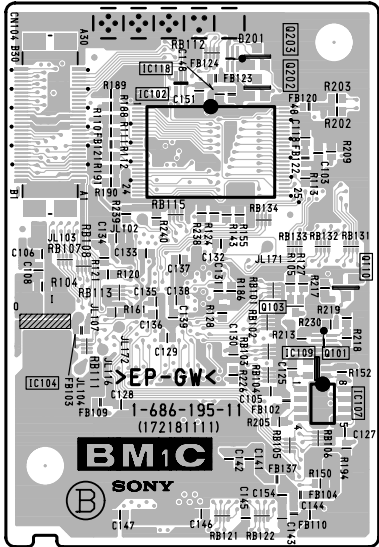

<CONDUCTOR SIDE>


**BM1C BOARD**  
Terminal name of semiconductors in  
silk screen printed circuit (\*)

| Ref.                            | * |
|---------------------------------|---|
| Q101, Q103, Q110,<br>Q116, Q201 | ② |
| Q202, Q203                      | ⑬ |
| Q105                            | ⑰ |


※: Refer to Terminal name of semiconductors  
in silk screen printed circuit (see page 4-18)










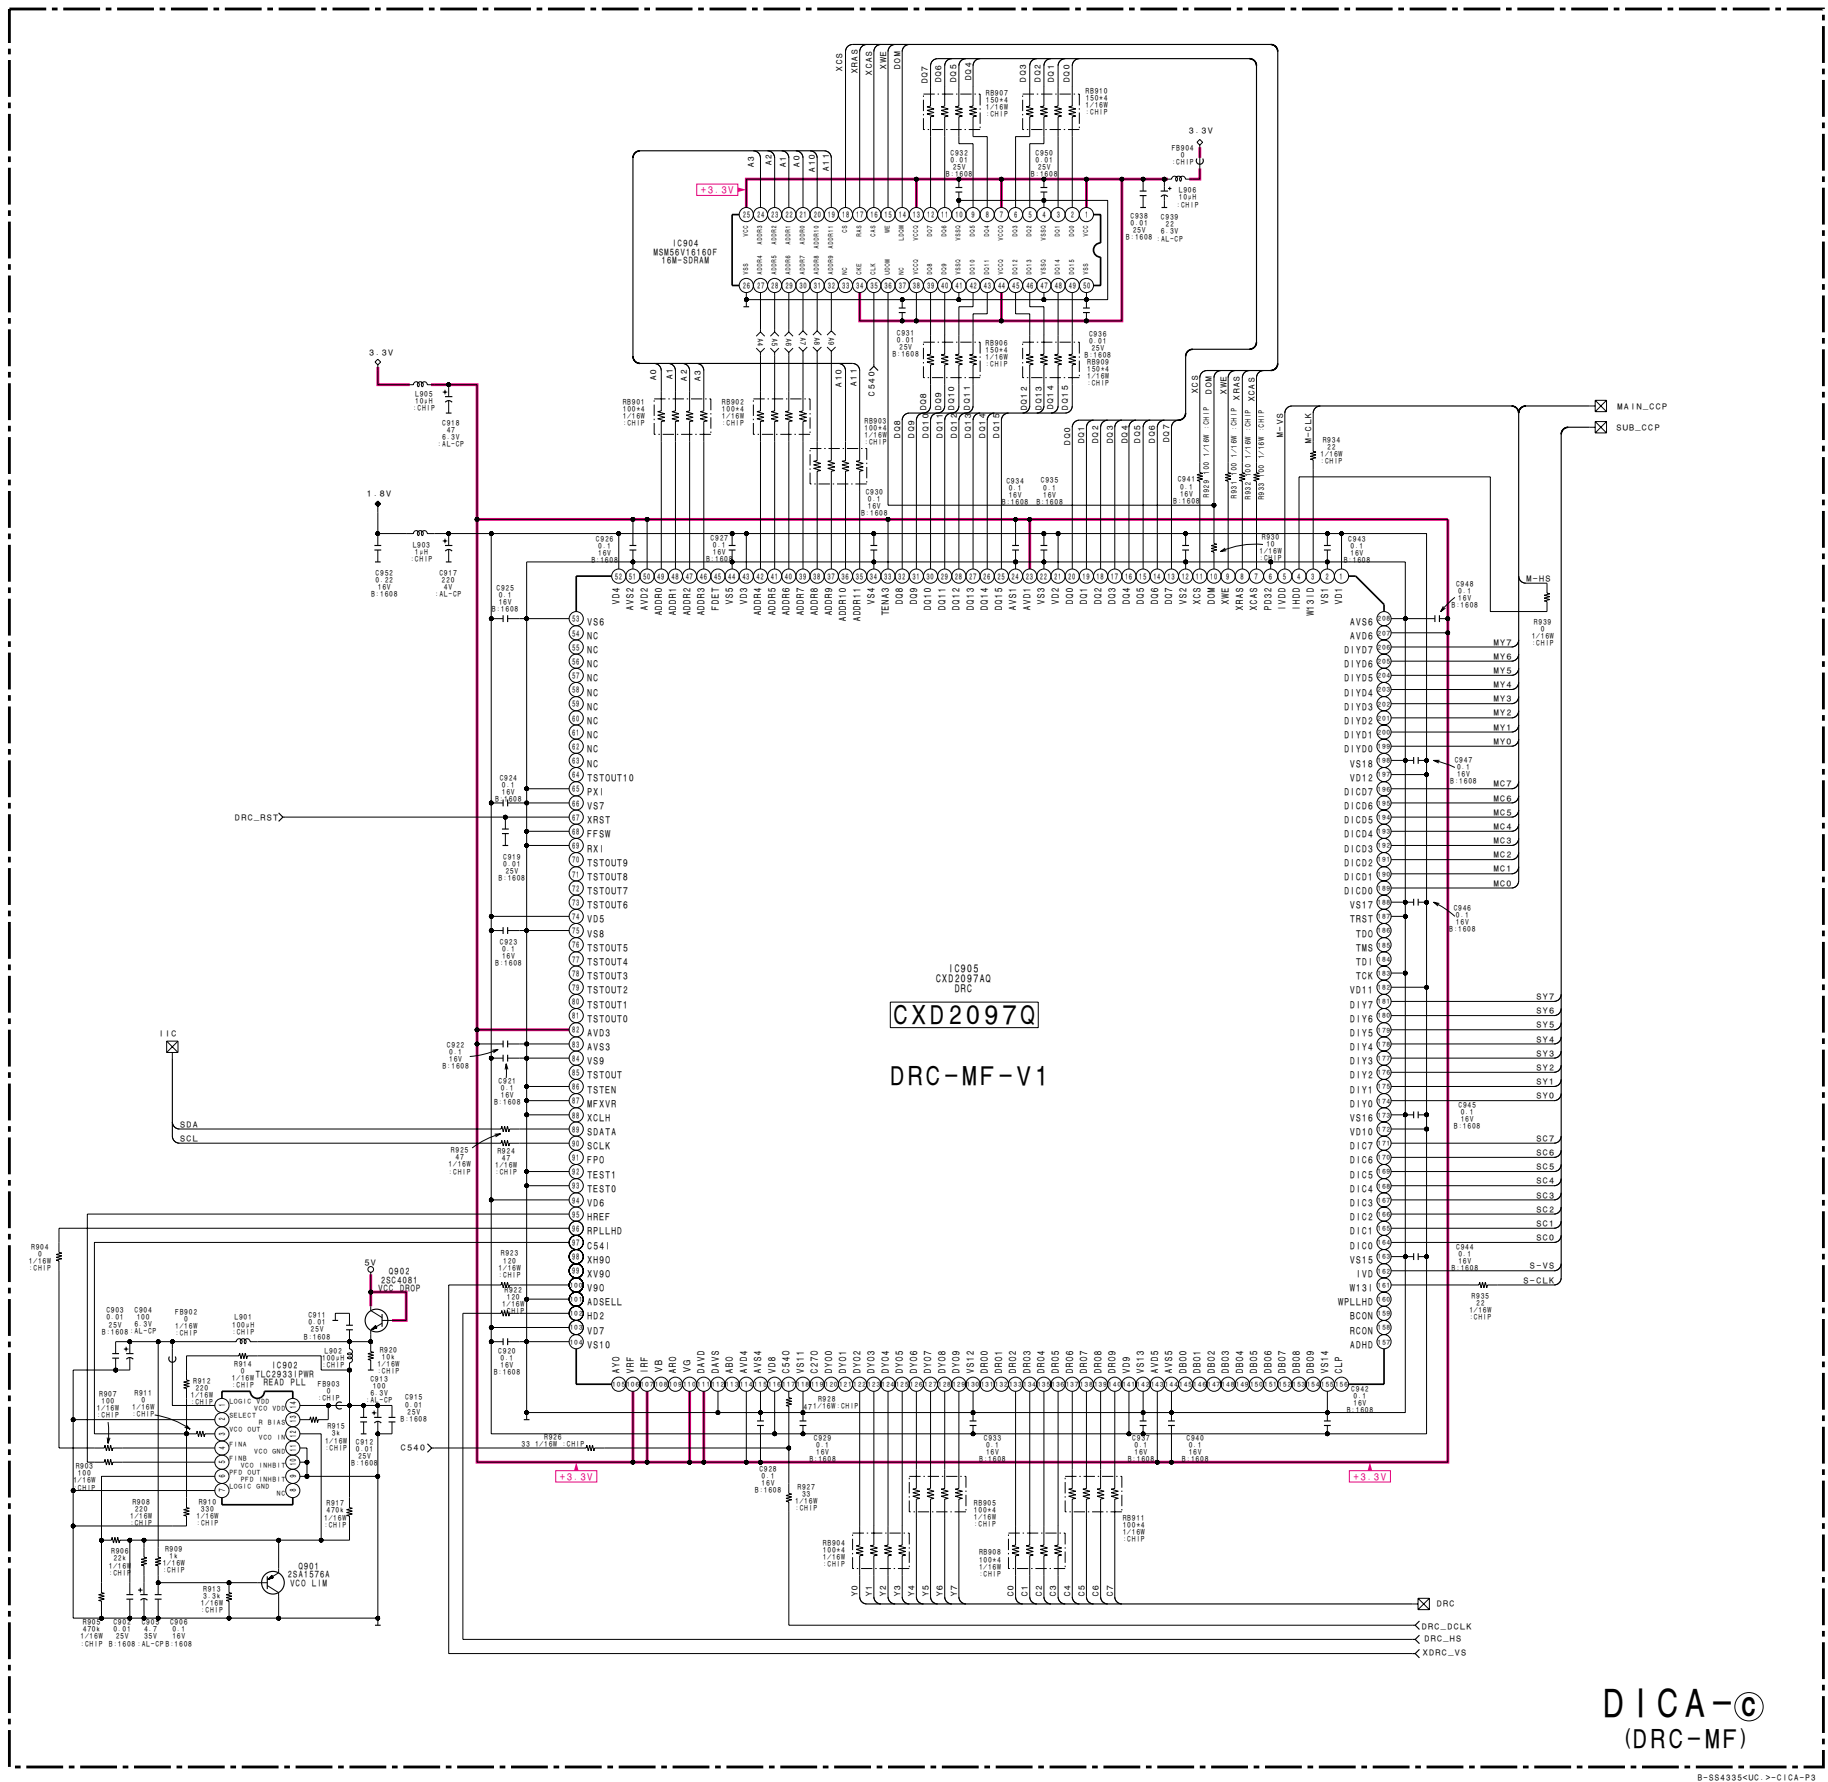


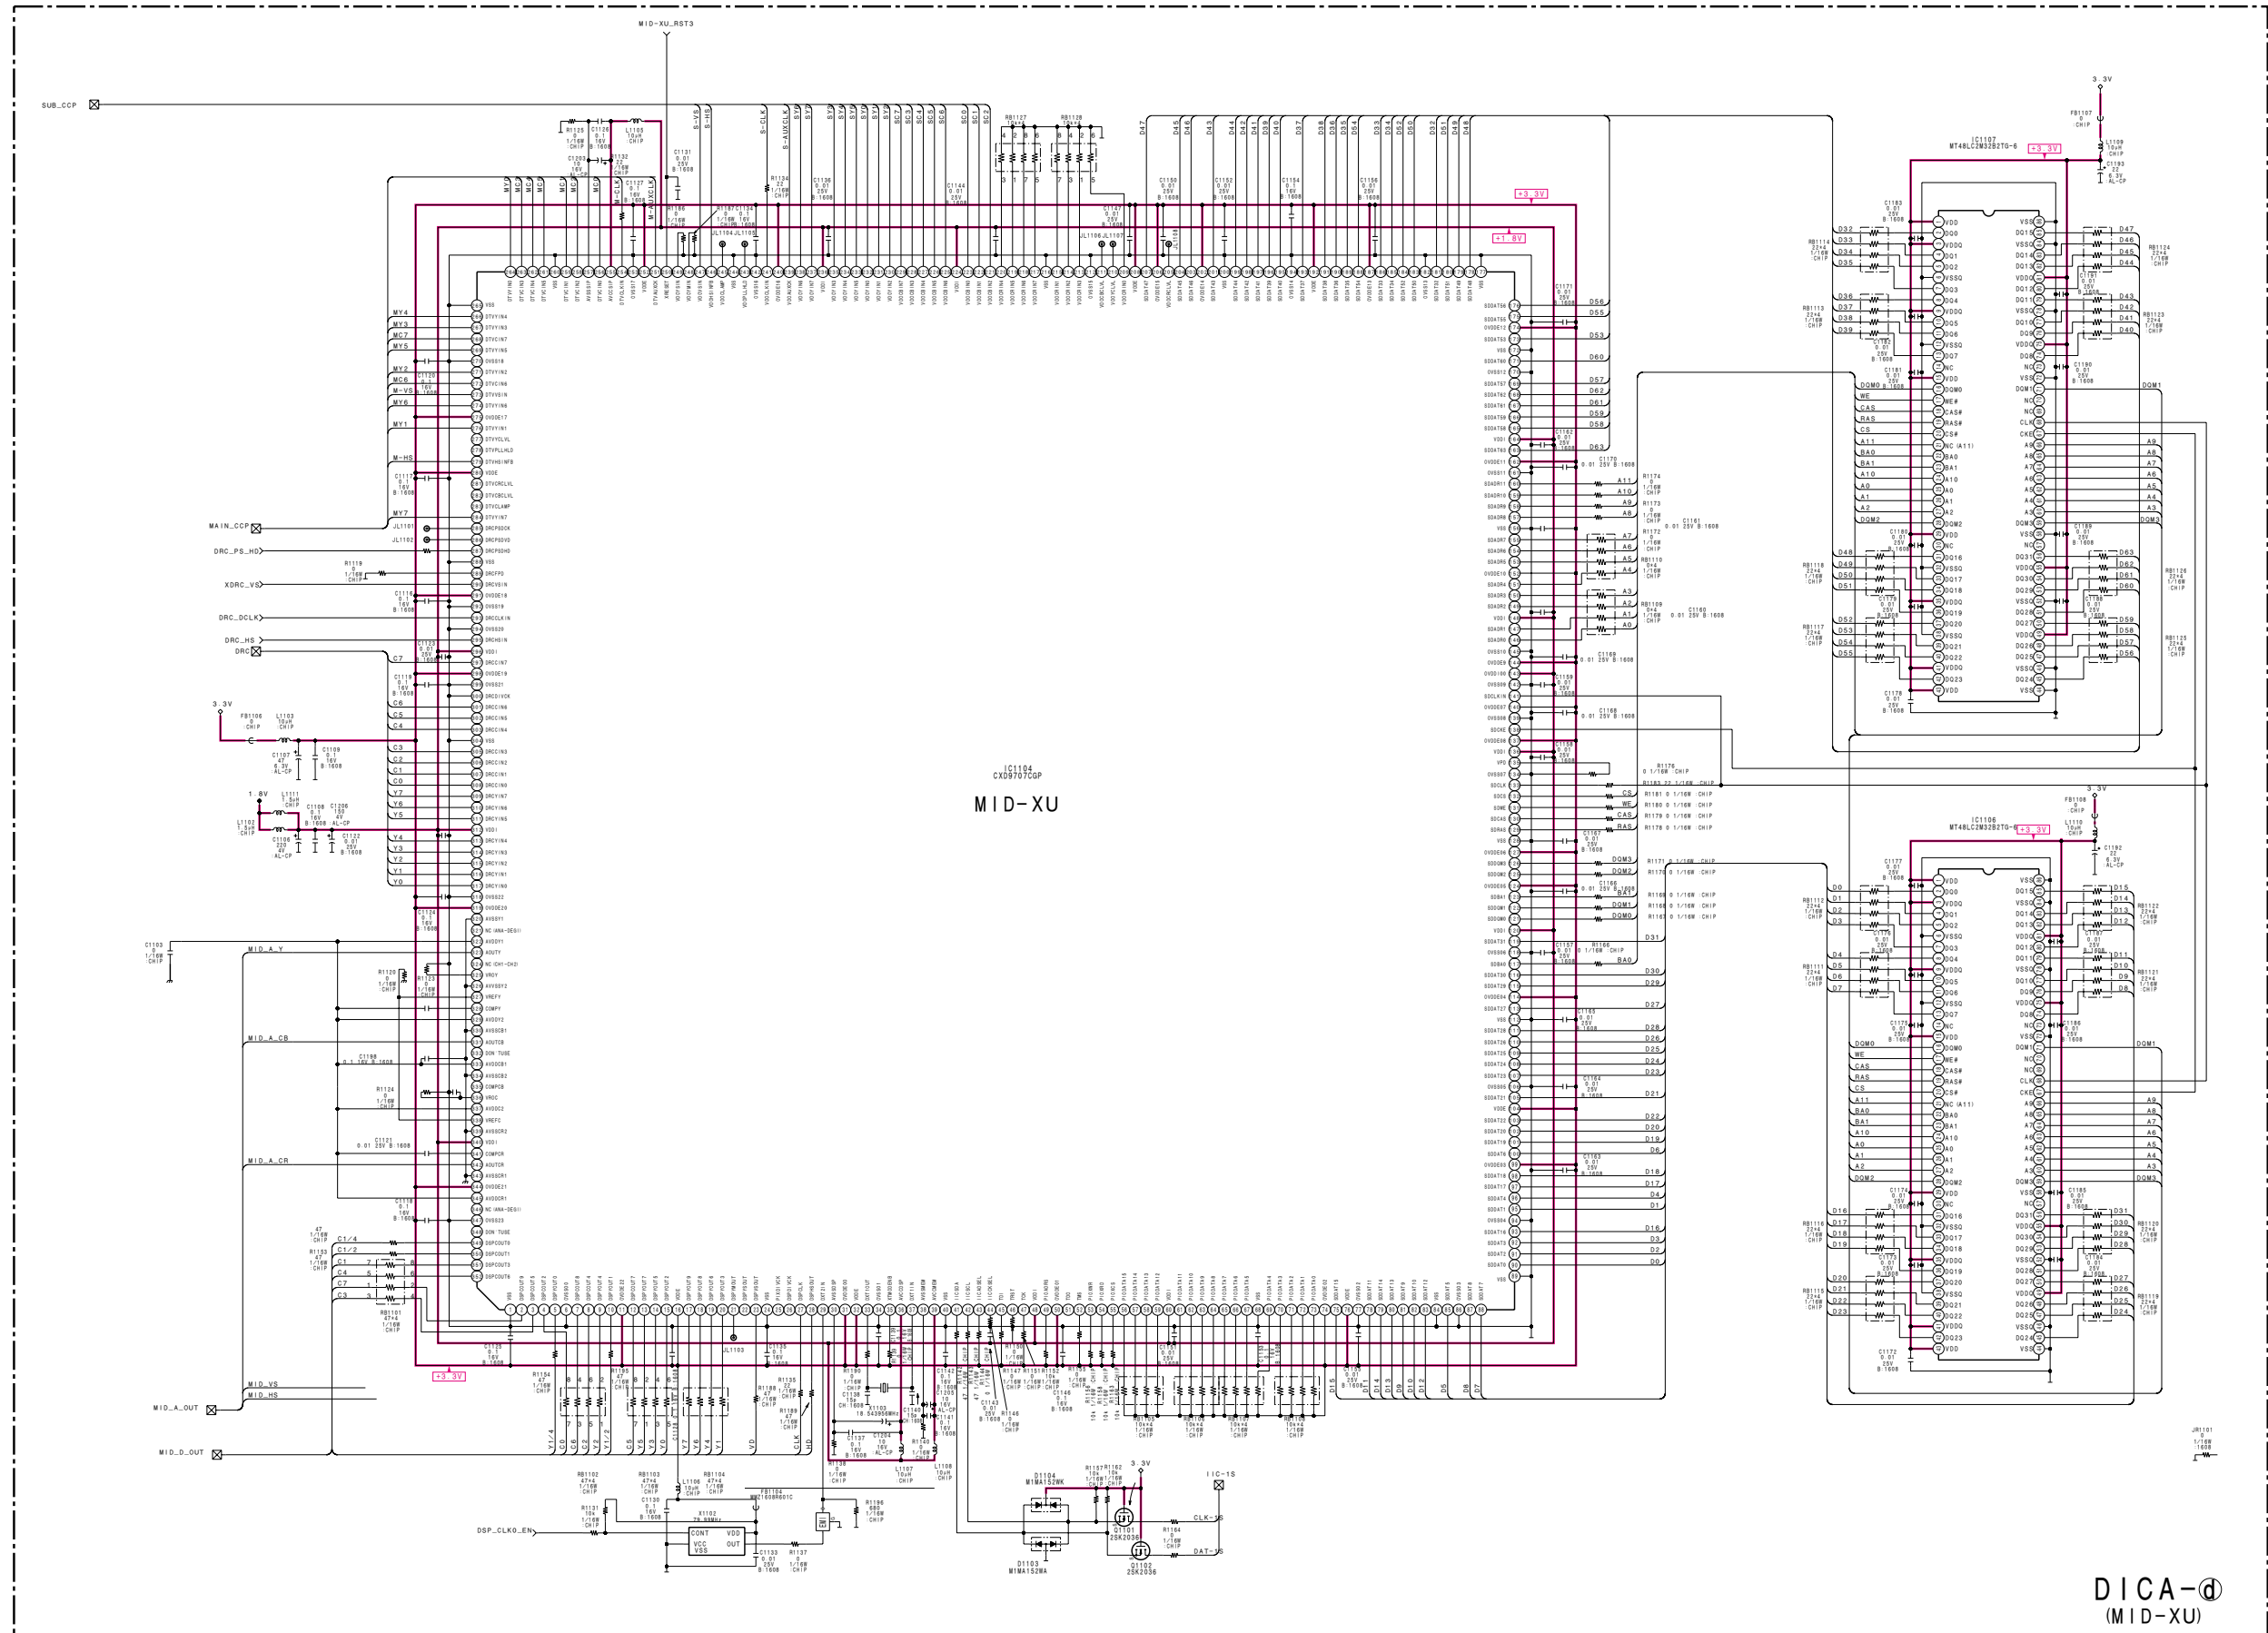


DICA-@  
(MID-XU)

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15


A  
B  
C  
D  
E  
F  
G  
H  
I  
J

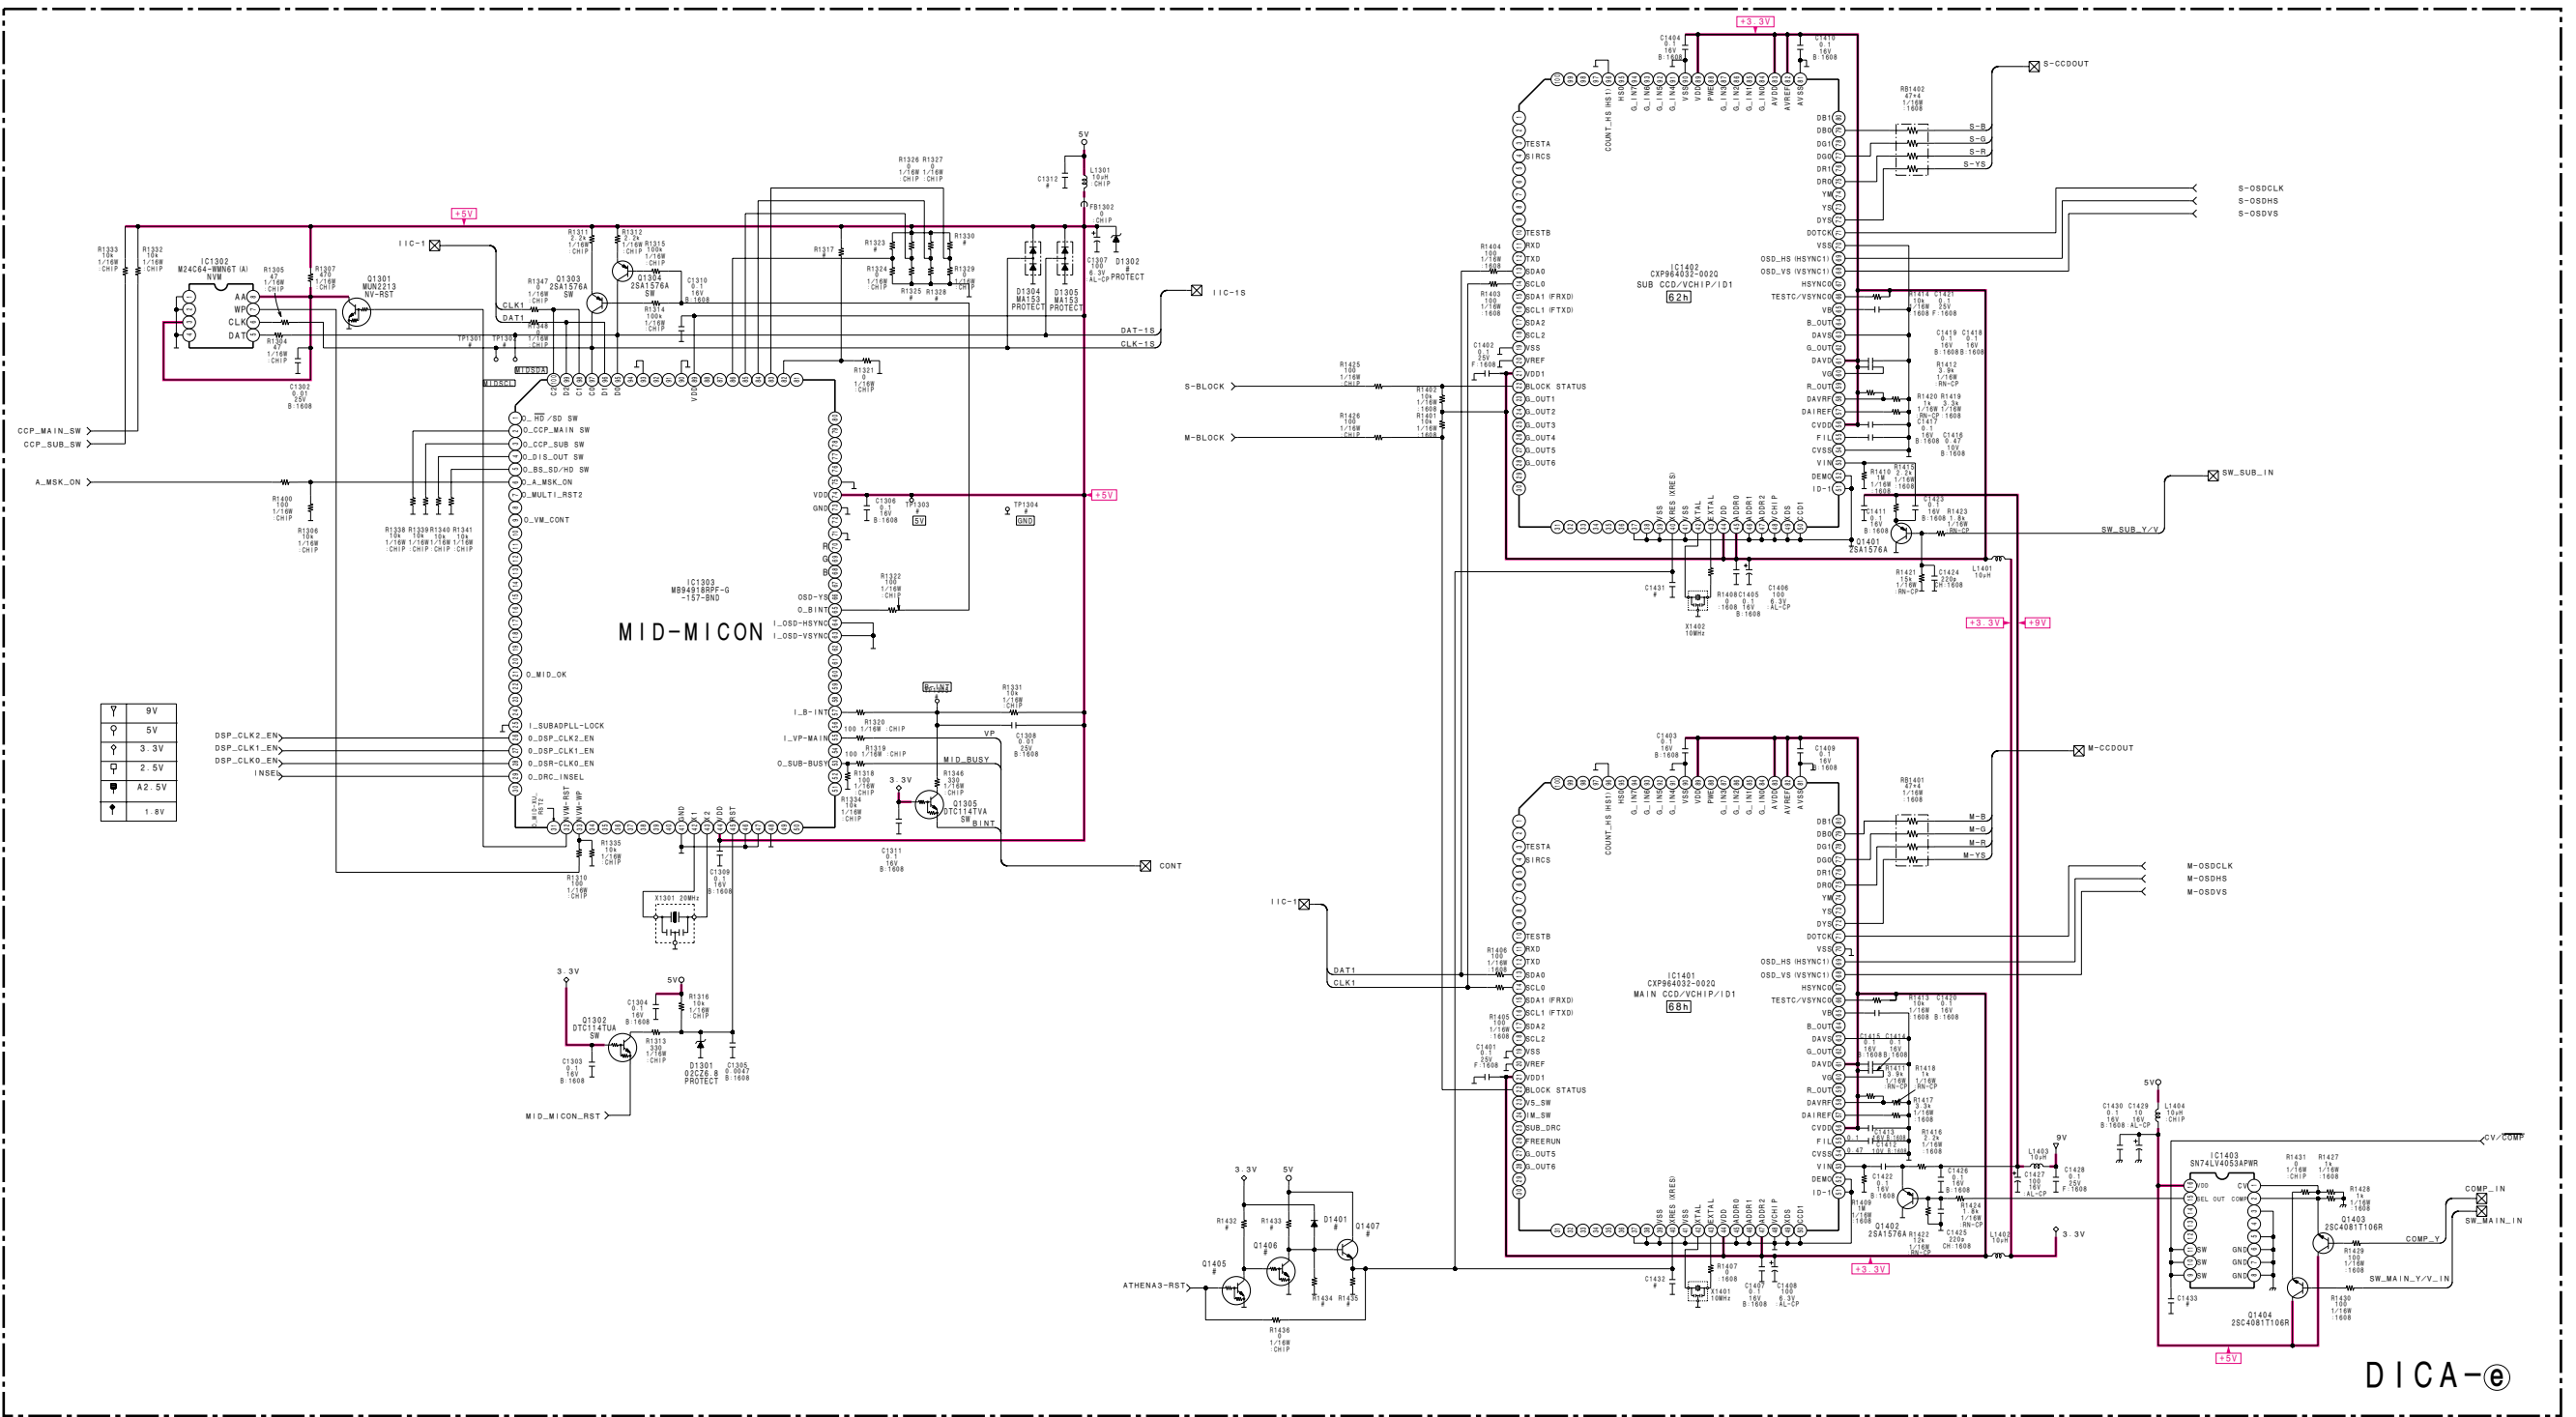

— DICA BOARD —

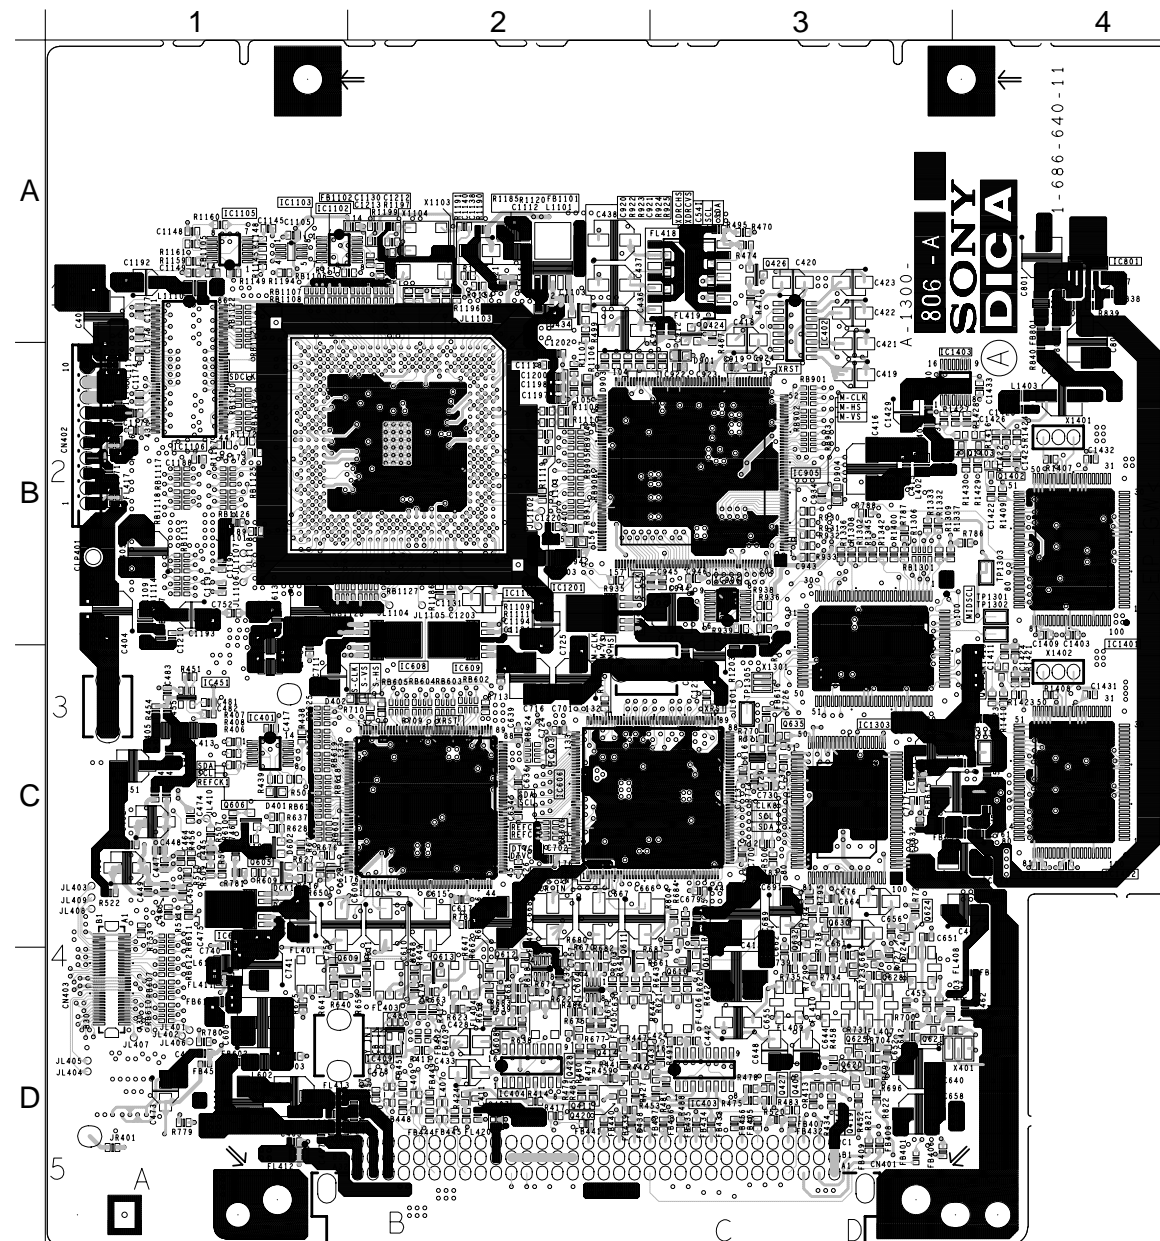


<COMPONENT SIDE>

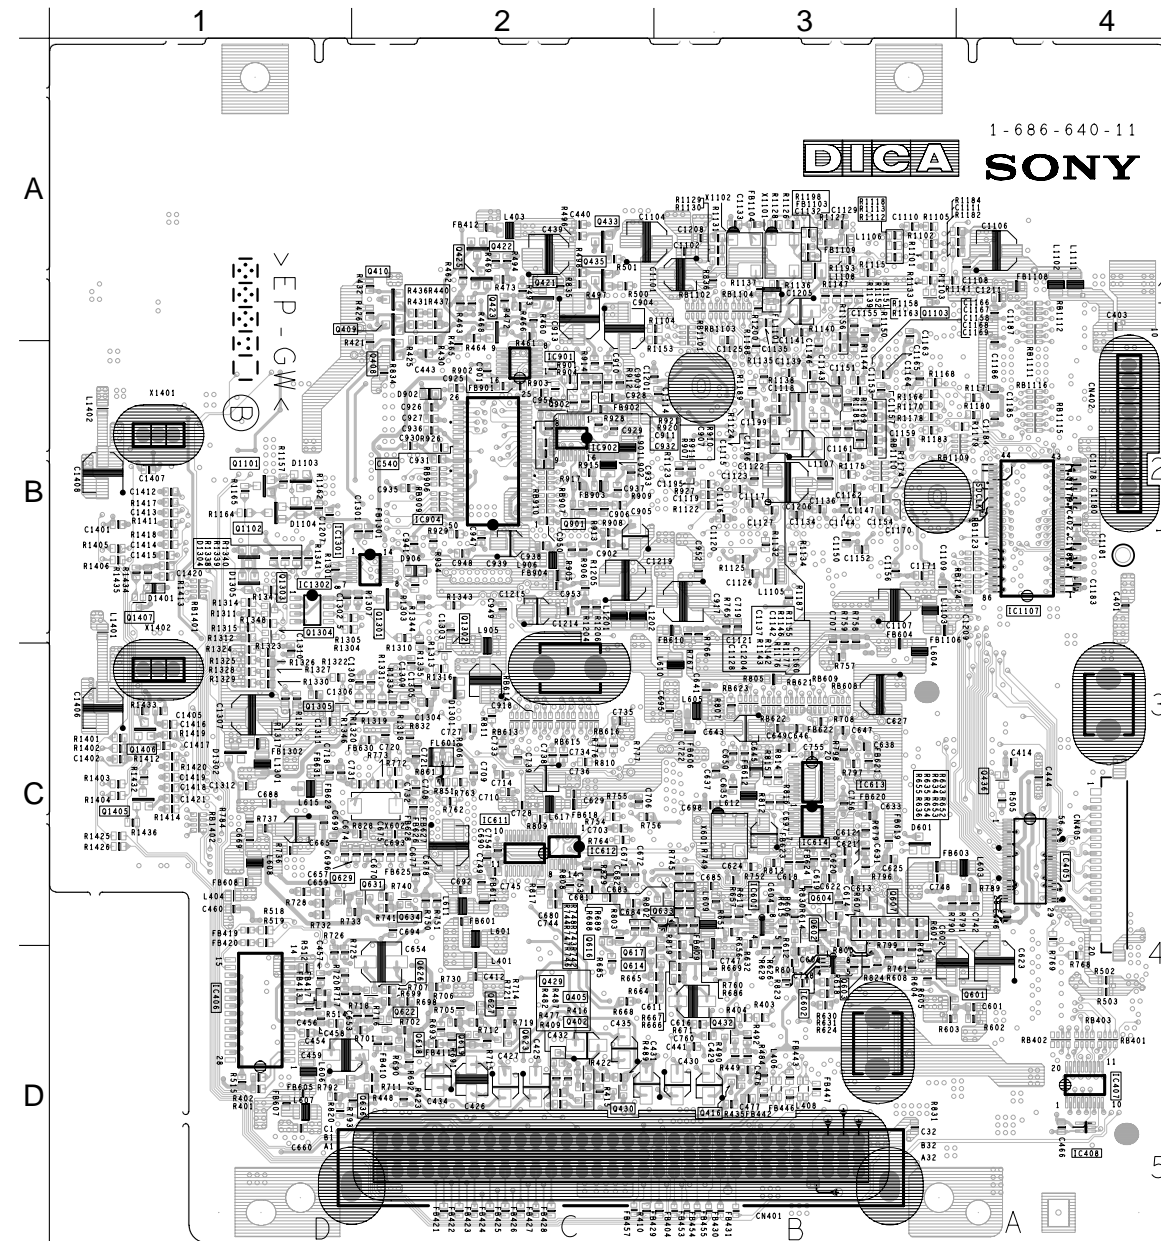


<CONDUCTOR SIDE>

## 4-5. SEMICONDUCTORS


AD9888XS-170\_AD80073




AK4114VQ-L  
CXA2163AQ-T6  
CXA2163Q-T6  
CXA2171Q-T6  
MC141627FT




AK4352VT-E2  
MC74LVX4052DTR2  
MC74LVXT4053DTR2  
NJM2123V(Te2)  
SN65LVDS1050PWR  
SN74LV4052APWR  
“TC4052BF(EL,N)”  
TC74VHC123AFT(EL)  
TC74VHC153FT(EL)




AK4524




BA033F-E2  
DS90LV018ATMX  
LM393DT  
M24128-BWMN6T  
M24C02-WMN6T(A)  
M24C04-WMN6T(A)  
M24C16-MN6T  
M24C64-WMN6T(B)  
MM1096AFF  
NJM2374AM-TE2  
NJM2903V(Te2)  
NJM4558V-TE2  
SI-3025LSA-TL  
TC4W66F(Te12R)  
TC4W66F-TE12L  
TC7W08FU  
TC7W08FU(Te12R)  
TC7W53FU(Te12R)  
TC7WH00FU(Te12R)  
TC7WH74FU(Te12R)  
TC7WHU04FU(Te12R)  
UPC339G2-E2




BA033FP-E2  
BA05FP-E2  
BA09FP-E2  
BA25BC0FP-E2  
NJM2125F(Te2)  
PST9245NL  
SN74AHC1G00DCKR  
TC7S66FU(Te85R)  
TC7SET02FU(Te85R)  
TC7SET32FU(Te85R)  
TC7SH04FU  
TC7SH04FU-TE85R  
TC7SH08FU-TE85R  
TC7SH14FU-TE85R  
TC7SU04FU(Te85R)  
TC7SZ125FU(Te85R)  
TC7SZ32FU(Te85R)




BA10324AF-E2  
BA8274F-E2  
LM339NS  
SN74ALVC00PWR  
SN74LV125APWR  
SN74LV4066APWR  
TC74VHC08FT(EL)  
TLC2932IPW-E20  
TLC2932IPWR




CXA2069Q-TL  
NJW1149




CXD9665Q




CXD9738R




CXD9746GG




CXD9752GG




CY27027ZCT  
RV5C387A-E2




DS90C387VJDX  
SAA5665HL/M1D/0724  
TFP501PZP




HD64F2377VFQ33V




UC3854BN




MB93491  
176Pin QFP




MCZ3001D  
MCZ3001DA




M52347FP-TE  
MK1714-01RT  
SN74AHCT245PWR  
SN74LV245APWR




MB88141APF-ER  
TDA9178T/N1.118




PW166B-20T




XC9572XL-10VQ44C




MBM29LV800TA-70PFTN-MR001




S-80828ANNP-EDR-T2  
S-80842ANNP-ED6-T2




MSM56V16160F-8T4FM1




MT48LC8M16A2TG-75-Y95W




TFP510PAP




TLC2934IPWR  
TLC5733AIPM




MM1563DFBE  
MM1565AFBE




HD64F2134AFA20V




MIP2C2  
TDA2822D013TR



MM1115XFBE  
8Pin SIP




L88M05T-FA-TL  
TA78M09F(Te16L)




TL431CLP-Z



MSP3411G-QA-B10



UPD64083GF-3BA




UPC1093J-1-T



IRFIB7N50A-LF31




2SB1121-ST  
2SB1121-S-TD  
2SD1615A-GP  
2SD1621-S-TD  
2SD874A-R-TX  
2SK2036(TE85L)




2PB709AR-115  
2PD601AR-115  
2SA1037AK-T146-QR  
2SA1037AK-T146-R  
2SA1162-G  
2SA1226-E4  
2SA1226-T1E3E4  
2SA1576A-T106-QR  
2SA1774R  
2SA1774TL-QR  
2SC1623-L5L6  
2SC2412K-T-146-QR  
2SC2712-YG-TE85L  
2SC3624A-T1L15L16  
2SC4081-R  
2SC4081T106R  
2SC4178-F13F14-T1  
2SC4178-F14  
2SC4617R  
2SC4617TL-QR  
2SD2114KT146  
2SD601A-Q-TX  
DTA114EUA-T106

DTA114TE-TL  
DTC114EE-TL  
DTC114EKA-T146  
DTC114TE-TL  
DTC144EE-TL  
DTC144EUA-T106  
MUN2111T1  
MUN2211T1  
UN2111  
UN2211




DTA143EUA-T106  
DTC114EUA-T106  
T146


2SC4213-AB-TE85L




HN1B01FU-TE85R  
HN1C03FU-TE85R  
IRFI644G-LF36




2SK2662(LBS2SONY)




1SS119-25TD  
RD6.2FB2  
RD6.2F-T7B2




D10SBS4  
D3SB60F3




RM11A  
RM11C




EG01CV1  
RD3.9SB2  
RD3.9SB2-T1  
RD4.7FB2  
RD4.7F-T7B2  
UF4005PKG23




1SS226  
DAN217-T146  
MA153-TX  
MA157-TX




DAP202K-T146  
MA132WA-TX  
MA3075WA-(TX)  
MA3130WA-TX




1SS184  
MA132WK-TX  
MA152WK-TX



DF06M-6031




D8LC20U-4012




D10SC4M-F  
D8LD40-F1




DTZ-TT11-6.8B  
HRU0103ATRF  
HZU6.8BTRF  
MA111-TX  
MA113-(TX)  
UDZSTE-1712B  
UDZSTE-1713B  
UDZSTE-1715B  
UDZSTE-173.6B  
UDZSTE-173.9B  
UDZSTE-175.1B  
UDZSTE-175.6B  
UDZSTE-176.8B  
UDZSTE-177.5B  
UDZSTE-178.2B  
UDZ-TE-17-7.5B  
UDZ-TE-17-8.2B




HN1D03FU-TE85R




D1NL20U-TR  
D1NL20U-TR2




02DZ22-TPH3



SEC1901C



SPR-325MVW









## SECTION 5

### EXPLODED VIEWS


- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked " \* " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

The components identified  marked are critical for safety.  
Replace only with the part number specified.

Les composants identifiés par la marque  sont critiques pour la sécurité.  
Ne les remplacer que par une pièce portant le numéro spécifié.



## 5-1. DISPLAY UNIT(PDM-4200)

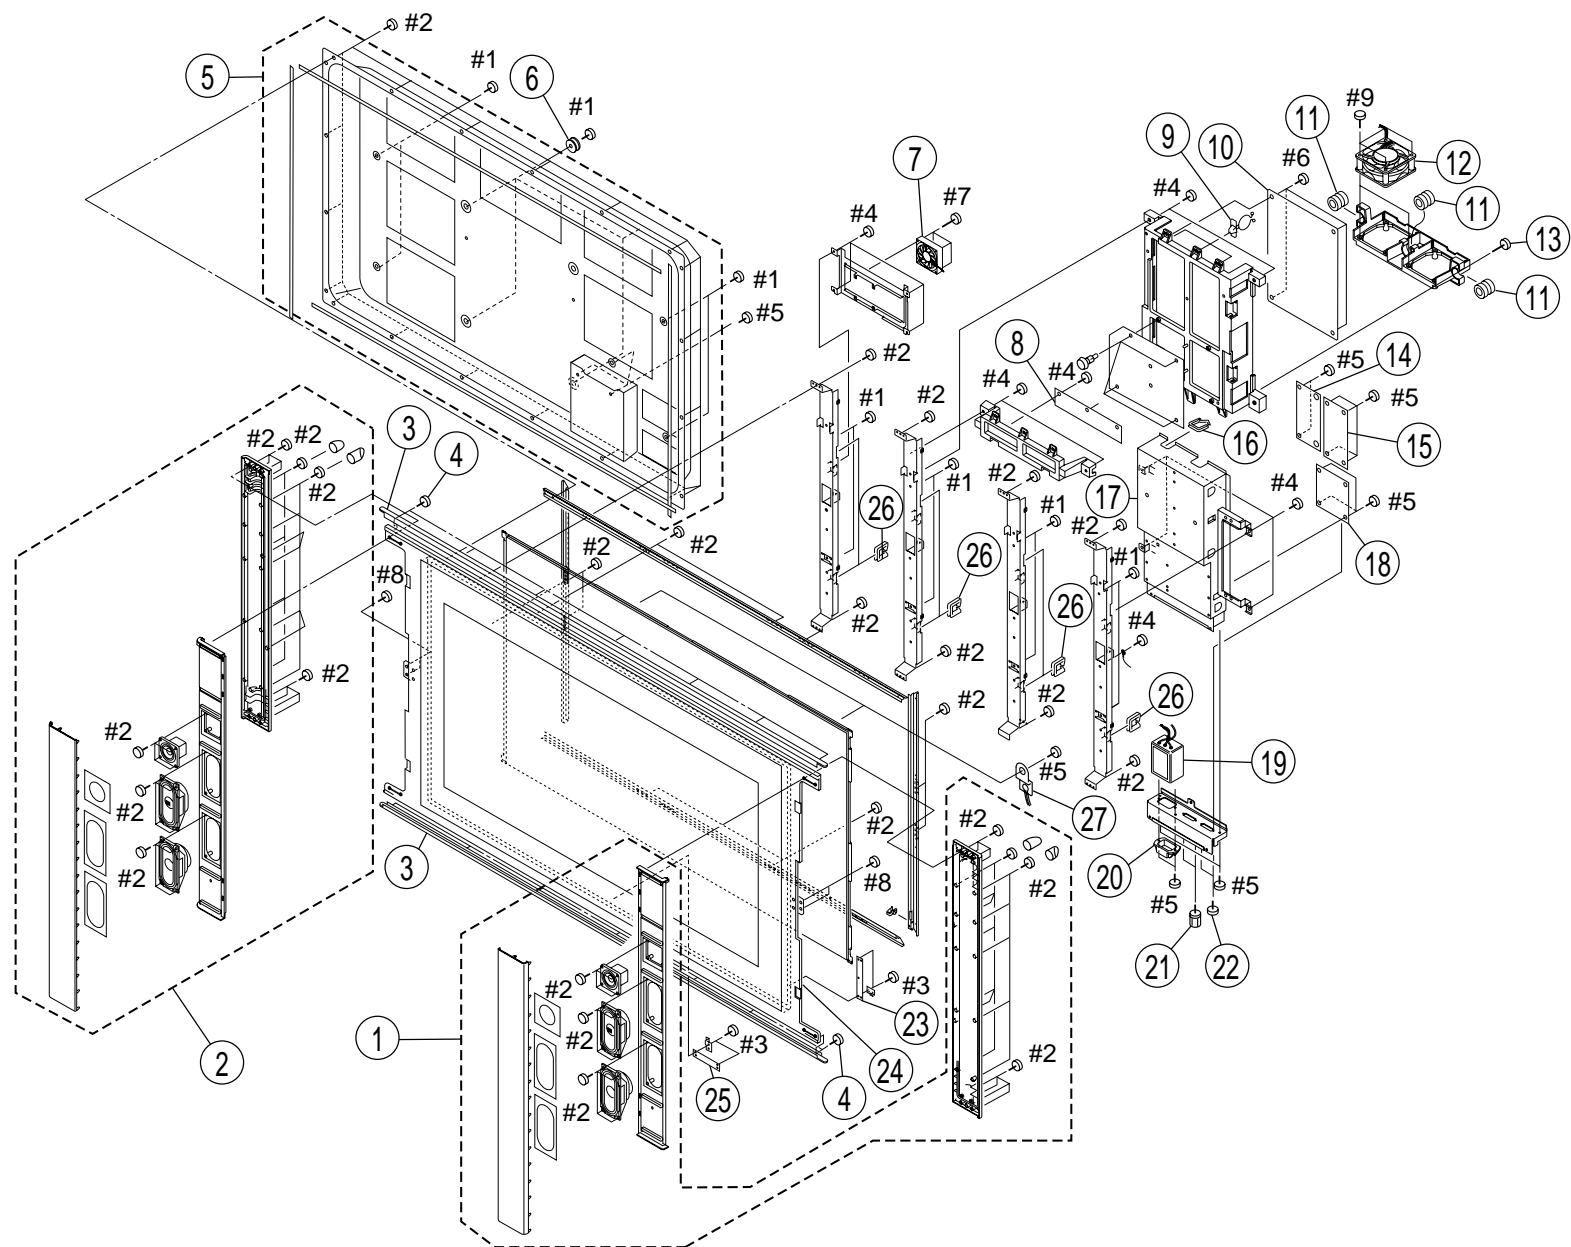

| REF.NO. | PART NO. | DESCRIPTION | REMARK |
|---------|----------|-------------|--------|
|---------|----------|-------------|--------|


|    |                |                          |  |
|----|----------------|--------------------------|--|
| 1  | A-1603-811-C   | SP (R) ASSY              |  |
| 2  | A-1603-810-C   | SP (L) ASSY              |  |
| 3  | 4-091-991-11   | BAR                      |  |
| 4  | 4-091-675-01   | SCREW, FIXED             |  |
| 5  | * X-4041-036-1 | COVER ASSY, REAR         |  |
| 6  | 4-091-681-01   | HOOK                     |  |
| 7  | 1-763-961-11   | FAN, DC                  |  |
| 8  | * A-1401-892-A | F2 BOARD, MOUNT          |  |
| 9  | 4-035-160-01   | PURSE LOCK (S) (DIA. 12) |  |
| 10 | * A-1300-778-D | G BOARD, COMPLETE        |  |
| 11 | 4-374-745-11   | CUSHION (A)              |  |
| 12 | 1-763-962-11   | FAN, D.C.                |  |
| 13 | 4-314-843-02   | SCREW, TAPPING, +4X12    |  |
| 14 | * A-1401-608-B | F BOARD, MOUNT           |  |
| 15 | * A-1401-609-B | K BOARD, MOUNT           |  |
| 16 | 2-433-598-01   | HOLDER (LT-11U), WIRE    |  |
| 17 | X-4040-983-1   | BRACKET (50) ASSY, U     |  |
| 18 | * A-1300-780-E | P BOARD, COMPLETE        |  |
| 19 | △ 1-417-336-11 | AC INLET                 |  |
| 20 | 2-990-241-02   | HOLDER (A), PLUG         |  |
| 21 | 4-635-966-01   | SCREW (HEX)              |  |
| 22 | 4-662-693-03   | GRIP, M2.6 S HEAD(EG)    |  |
| 23 | * A-1401-606-B | R1 BOARD, MOUNT          |  |
| 24 | A-1604-359-A   | KIT, FILTER GLASS ASSY   |  |
| 25 | * A-1401-891-B | R2 BOARD, MOUNT          |  |
| 26 | 4-091-688-01   | HOLDER, EDGE             |  |
| 27 | * 1-477-718-11 | SENSOR, TEMPERATURE      |  |

|    |              |                          |  |
|----|--------------|--------------------------|--|
| #1 | 7-682-973-49 | +PSW 5X16                |  |
| #2 | 7-685-663-79 | +BVTP 4X16, TYPE 2, IT-3 |  |

| REF.NO. | PART NO. | DESCRIPTION | REMARK |
|---------|----------|-------------|--------|
|---------|----------|-------------|--------|

|    |              |                          |  |
|----|--------------|--------------------------|--|
| #3 | 7-685-647-79 | +BVTP 3X10, TYPE 2, IT-3 |  |
| #4 | 7-682-663-09 | +PSW 4X12                |  |
| #5 | 7-682-948-09 | +PSW 3X8                 |  |
| #6 | 7-685-648-79 | +BV 3X12, TYPE 2, IT-3   |  |
| #7 | 7-682-667-09 | +PS 4X25                 |  |
| #8 | 7-685-553-19 | +BTTP 2.6X6              |  |
| #9 | 7-685-167-19 | +PTP 4X35                |  |

## 5-2. MEDIA RECEIVER UNIT-1(MBT-XBR900)

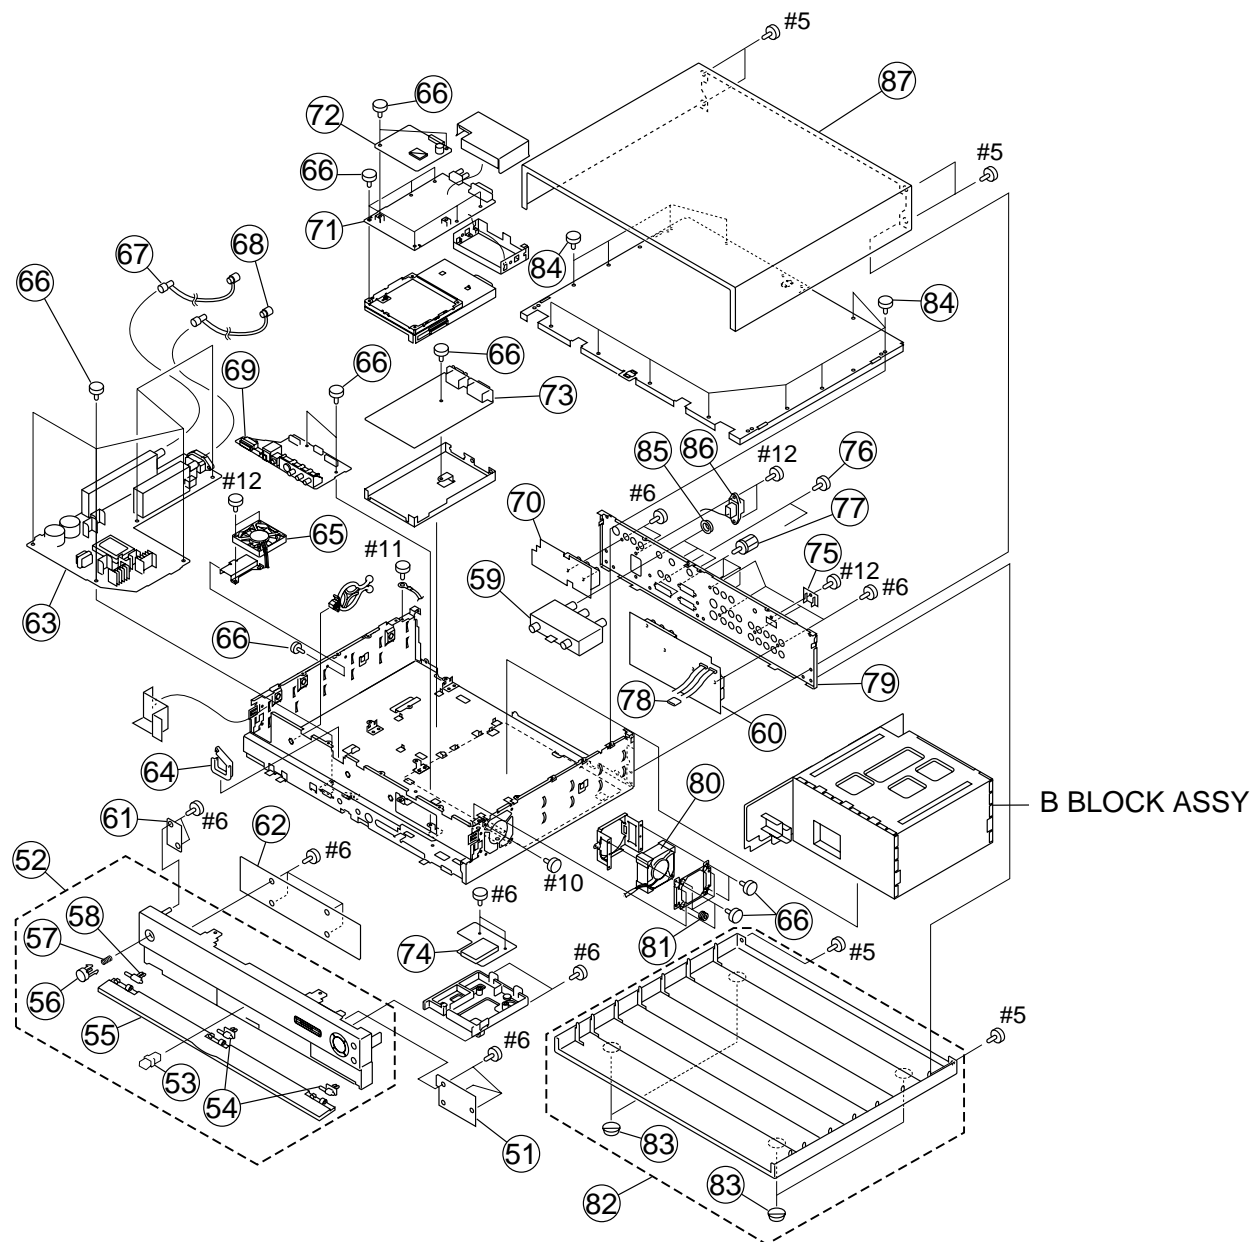

| REF.NO. | PART NO. | DESCRIPTION | REMARK |
|---------|----------|-------------|--------|
|---------|----------|-------------|--------|

|    |                |                   |       |
|----|----------------|-------------------|-------|
| 51 | * A-1401-937-A | H3 BOARD, MOUNT   |       |
| 52 | X-4040-969-1   | PANEL ASSY, FRONT | 53-58 |
| 53 | 4-042-192-21   | CATCHER, PUSH     |       |
| 54 | 3-703-035-11   | SHAFT, DOOR       |       |
| 55 | X-4040-970-2   | DOOR ASSY         |       |

|    |                |                     |  |
|----|----------------|---------------------|--|
| 56 | * 4-091-608-01 | BUTTON, POWER       |  |
| 57 | 4-036-405-01   | SPRING, COMPRESSION |  |
| 58 | 4-045-250-51   | DAMPER              |  |
| 59 | 1-771-787-11   | SWITCH, RF ANTENNA  |  |
| 60 | * A-1401-660-A | U1 BOARD, MOUNT     |  |

|    |                |                       |  |
|----|----------------|-----------------------|--|
| 61 | * A-1401-938-A | H4 BOARD, MOUNT       |  |
| 62 | * A-1401-936-A | H1 BOARD, MOUNT       |  |
| 63 | * A-1300-807-B | A BOARD, MOUNT        |  |
| 64 | 2-433-598-01   | HOLDER (LT-11U), WIRE |  |
| 65 | 1-763-659-11   | FAN, DC               |  |

|    |                |                         |  |
|----|----------------|-------------------------|--|
| 66 | 4-382-854-01   | SCREW (M3X8), P, SW (+) |  |
| 67 | * 1-555-110-00 | P-P CABLE               |  |
| 68 | * 1-557-056-31 | CABLE, P-P              |  |
| 69 | * A-1401-935-A | H2 BOARD, MOUNT         |  |
| 70 | * A-1401-661-A | U2 BOARD, MOUNT         |  |

|    |                |                  |  |
|----|----------------|------------------|--|
| 71 | * A-1401-934-A | AD BOARD, MOUNT  |  |
| 72 | * A-1401-662-B | AU BOARD, MOUNT  |  |
| 73 | * A-1300-944-B | M BOARD, MOUNT   |  |
| 74 | * A-1401-751-A | MS2 BOARD, MOUNT |  |
| 75 | 4-087-363-01   | COVER, CONNECTOR |  |

|    |                |                        |  |
|----|----------------|------------------------|--|
| 76 | 4-662-693-03   | GRIP, M2.6 S HEAD (EG) |  |
| 77 | 4-093-921-01   | SCREW (HEX)            |  |
| 78 | 1-543-936-11   | CORE (FPC)             |  |
| 79 | * 4-091-624-01 | PANEL (UC), REAR       |  |
| 80 | 1-763-962-11   | FAN, D.C.              |  |


| REF.NO. | PART NO. | DESCRIPTION | REMARK |
|---------|----------|-------------|--------|
|---------|----------|-------------|--------|

|    |              |                     |    |
|----|--------------|---------------------|----|
| 81 | 3-074-851-01 | DAMPER (FAN 25)     |    |
| 82 | X-4040-972-1 | COVER ASSY, BOTTOM  | 83 |
| 83 | 3-078-830-01 | FOOT                |    |
| 84 | 4-670-040-01 | SCREW               |    |
| 85 | 3-682-691-00 | NUT, WASHER HEXAGON |    |

|    |                |                 |  |
|----|----------------|-----------------|--|
| 86 | 1-580-375-51   | INLET 3P        |  |
| 87 | * X-4041-313-1 | ASSY, COVER TOP |  |


|     |              |                             |  |
|-----|--------------|-----------------------------|--|
| #5  | 7-682-948-09 | SCREW +PSW 3X8              |  |
| #6  | 7-685-648-79 | SCREW +BVTP 3X12 TYPE2 IT-3 |  |
| #10 | 7-682-149-04 | SCREW +P 3X10               |  |
| #11 | 7-682-961-01 | SCREW +PSW 4X8              |  |
| #12 | 7-682-951-01 | SCREW +PSW 3X14             |  |

### 5-3. MEDIA RECEIVER UNIT-2(MBT-XBR900)

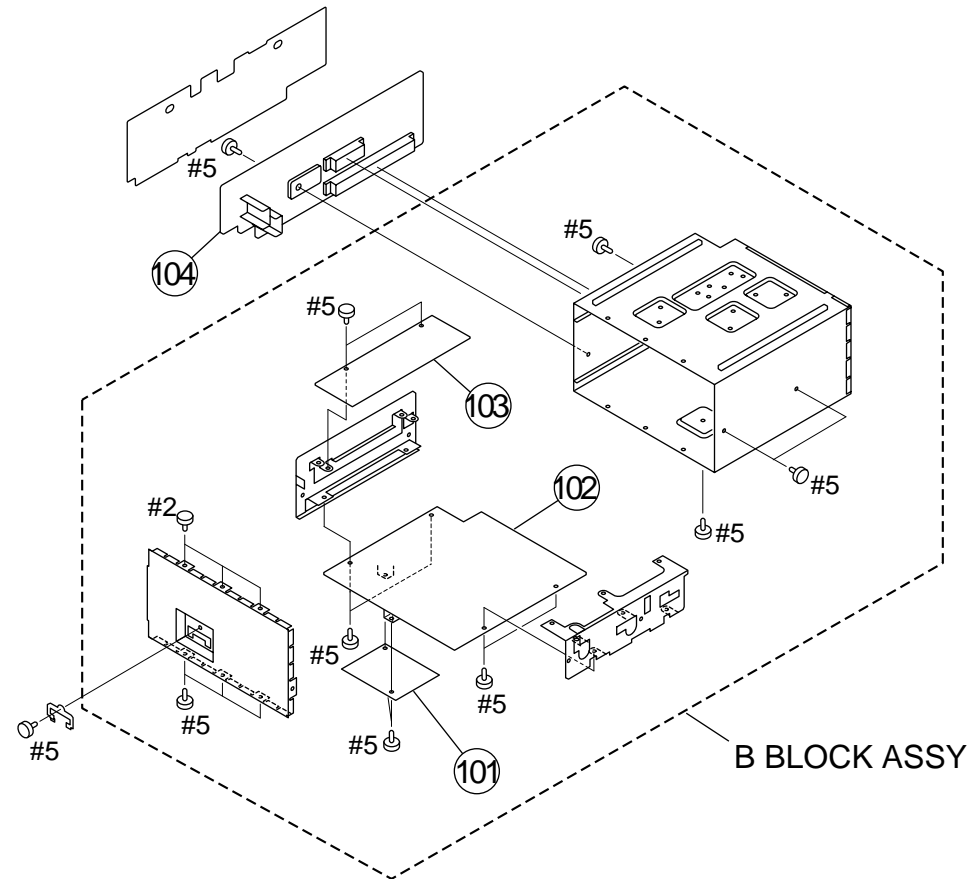


| REF.NO. | PART NO.         | DESCRIPTION       | REMARK |
|---------|------------------|-------------------|--------|
| 101     | * A-1300-834-C   | BM1C BOARD, MOUNT |        |
| 102     | * A-1300-806-A   | DICA BOARD, MOUNT |        |
| 103     | * A-1401-663-A   | DP BOARD, MOUNT   |        |
| 104     | * A-1401-66099-B | IFA BOARD, MOUNT  |        |
| #5      | 7-682-948-09     | SCREW +PSW 3X8    |        |

## 5-4. PACKING MATERIALS FOR DISPLAY UNIT(PDM-4200)

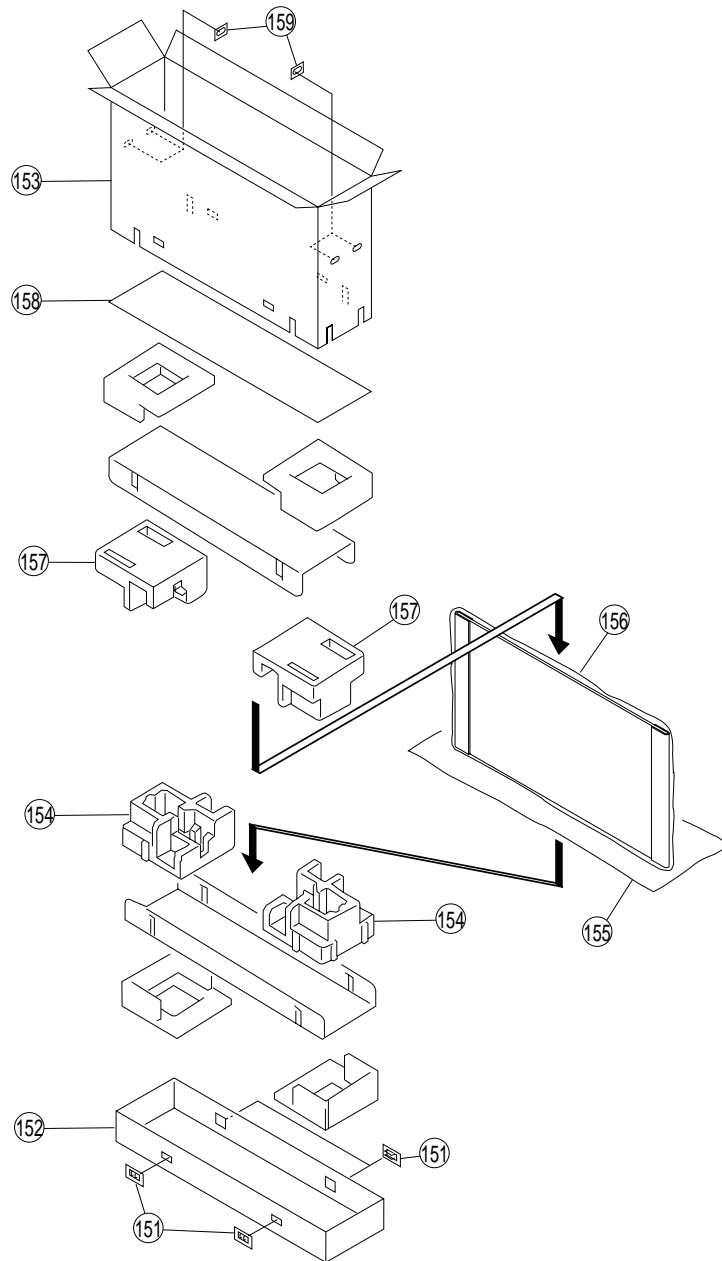

| REF.NO. | PART NO.       | DESCRIPTION       | REMARK |
|---------|----------------|-------------------|--------|
| 151     | * 4-030-895-01 | JOINT             |        |
| 152     | * 4-091-471-01 | TRAY              |        |
| 153     | * 4-092-151-02 | INDIVIDUAL CARTON |        |
| 154     | * 4-091-473-01 | CUSHION (LOWER)   |        |
| 155     | * 4-092-670-01 | SHEET, PROTECTION |        |
| 156     | * 4-091-475-01 | BAG, PROTECTION   |        |
| 157     | * 4-091-472-01 | CUSHION (UPPER)   |        |
| 158     | * 4-091-474-01 | BOARD, TOP        |        |
| 159     | * 3-704-066-01 | HANDLE (B)        |        |

## 5-5. PACKING MATERIALS FOR MEDIA RECEIVER UNIT(MBT-XBR900)

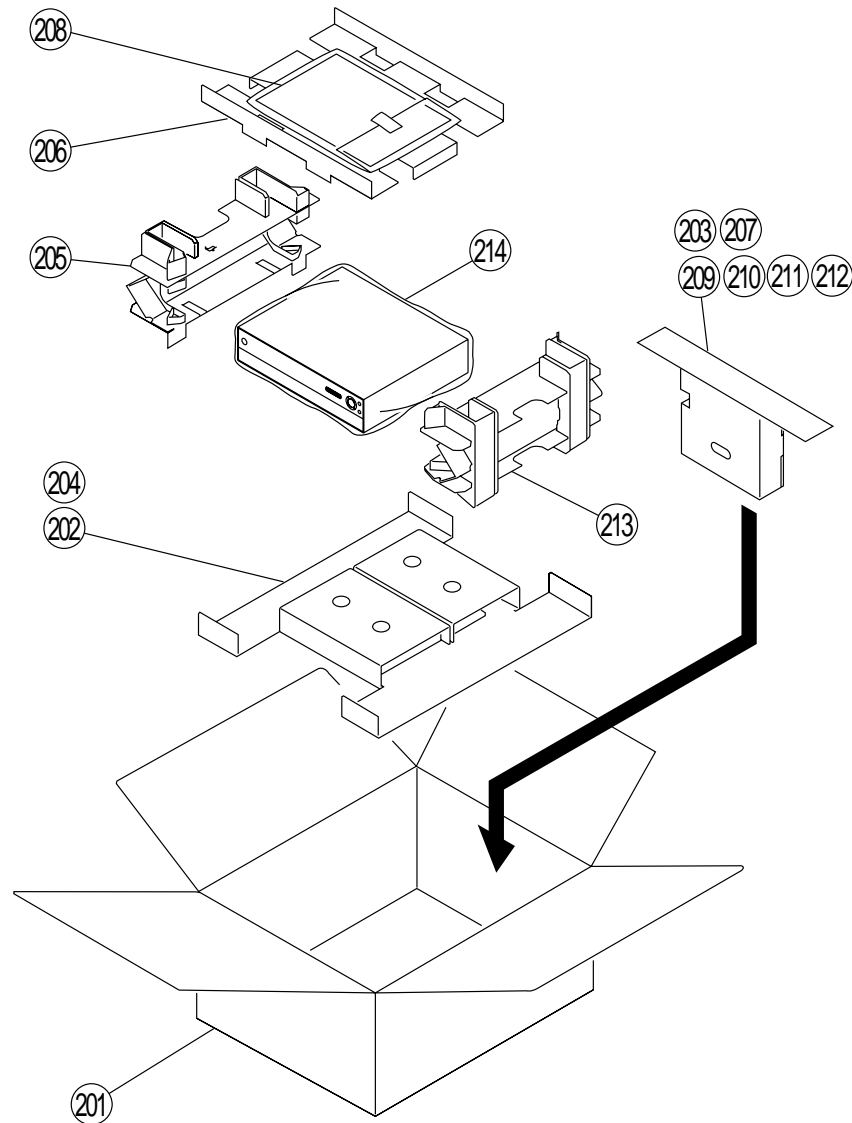

| REF.NO. | PART NO.       | DESCRIPTION                    | REMARK |
|---------|----------------|--------------------------------|--------|
| 201     | * 4-091-998-01 | INDIVIDUAL CARTON              |        |
| 202     | * 4-091-737-01 | SPACER (B)                     |        |
| 203     | ⚠ 1-823-863-21 | CORD, POWER                    |        |
| 204     | 1-824-831-11   | CORD WITH CONNECTOR            |        |
| 205     | * 4-091-735-01 | CUSHION, LEFT                  |        |
| 206     | * 4-091-736-01 | SPACER (A)                     |        |
| 207     | 2-990-242-01   | HOLDER (B), PLUG               |        |
| 208     | 4-092-940-12   | MANUAL, INSTRUCTION (ENGLISH)  |        |
|         | 4-092-940-25   | MANUAL, INSTRUCTION (FRENCH)   |        |
|         | 4-092-940-35   | MANUAL, INSTRUCTION (SPANISH)  |        |
| 209     | * 4-091-738-01 | BOX, ACCESSORY                 |        |
| 210     | 1-477-687-11   | REMOTE COMMANDER (RM-927Y)     |        |
| 211     | 1-757-319-41   | CABLE, COAXIAL (WITH (F) PLUG) |        |
| 212     | X-4040-886-1   | ASSY, CLEANING CLOTH           |        |
| 213     | * 4-091-734-01 | CUSHION, RIGHT                 |        |
| 214     | * 3-704-297-01 | BAG, PROTECTION                |        |

## SECTION 6

### ELECTRICAL PARTS LIST

#### NOTE:

The components identified  $\triangle$  marked are critical for safety.  
Replace only with the part number specified.

Les composants identifiés par la marque  $\triangle$  sont critiques pour la sécurité.  
Ne les remplacer que par une pièce portant le numéro spécifié.

When indicating parts by reference number, please include the board name.

- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- Items marked " \* " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

#### RESISTORS

- All resistors are in ohms
- F : nonflammable



| No. | # | Board | Type       | △/* | Ref.No. | Part No.     | Description                     | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|------------|-----|---------|--------------|---------------------------------|-----------|-----------|------------|
| 1   |   | R1    | CAPACITOR  |     | C701    | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V     |           |           |            |
| 2   |   | R1    | CAPACITOR  |     | C702    | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V          |           |           |            |
| 3   |   | R1    | CONNECTOR  | *   | CN701   | 1-565-882-11 | PIN, CONNECTOR (PC BOARD) 10P   |           |           |            |
| 4   |   | R1    | DIODE      |     | D701    | 6-500-487-01 | DIODE SMLU12D16W                |           |           |            |
| 5   |   | R1    | DIODE      |     | D703    | 6-500-487-01 | DIODE SMLU12D16W                |           |           |            |
| 6   |   | R1    | DIODE      |     | D705    | 6-500-425-01 | DIODE SELU1E50CM                |           |           |            |
| 7   |   | R1    | IC         |     | IC701   | 6-600-117-01 | IC GP1UM27SRK                   |           |           |            |
| 8   |   | R1    | TRANSISTOR |     | Q701    | 8-729-028-73 | TRANSISTOR DTA114EUA-T106       |           |           |            |
| 9   |   | R1    | TRANSISTOR |     | Q702    | 8-729-028-73 | TRANSISTOR DTA114EUA-T106       |           |           |            |
| 10  |   | R1    | TRANSISTOR |     | Q703    | 8-729-028-73 | TRANSISTOR DTA114EUA-T106       |           |           |            |
| 11  |   | R1    | TRANSISTOR |     | Q704    | 8-729-028-73 | TRANSISTOR DTA114EUA-T106       |           |           |            |
| 12  |   | R1    | TRANSISTOR |     | Q705    | 8-729-028-73 | TRANSISTOR DTA114EUA-T106       |           |           |            |
| 13  |   | R1    | TRANSISTOR |     | Q706    | 8-729-028-73 | TRANSISTOR DTA114EUA-T106       |           |           |            |
| 14  |   | R1    | RESISTOR   |     | R701    | 1-216-812-11 | METAL CHIP 180 5% 1/10W         |           |           |            |
| 15  |   | R1    | RESISTOR   |     | R702    | 1-216-809-11 | METAL CHIP 100 5% 1/10W         |           |           |            |
| 16  |   | R1    | RESISTOR   |     | R703    | 1-216-812-11 | METAL CHIP 180 5% 1/10W         |           |           |            |
| 17  |   | R1    | RESISTOR   |     | R704    | 1-216-820-11 | METAL CHIP 820 5% 1/10W         |           |           |            |
| 18  |   | R1    | RESISTOR   |     | R705    | 1-216-814-11 | METAL CHIP 270 5% 1/10W         |           |           |            |
| 19  |   | R1    | RESISTOR   |     | R706    | 1-216-820-11 | METAL CHIP 820 5% 1/10W         |           |           |            |
| 20  |   | R1    | RESISTOR   |     | R710    | 1-216-805-11 | METAL CHIP 47 5% 1/10W          |           |           |            |
| 21  |   | R2    | CONNECTOR  | *   | CN751   | 1-565-876-11 | PIN, CONNECTOR (PC BOARD) 4P    |           |           |            |
| 22  |   | R2    | DIODE      |     | D751    | 6-500-488-01 | DIODE NSPW515BS                 |           |           |            |
| 23  |   | R2    | DIODE      |     | D752    | 6-500-488-01 | DIODE NSPW515BS                 |           |           |            |
| 24  |   | R2    | DIODE      |     | D753    | 6-500-488-01 | DIODE NSPW515BS                 |           |           |            |
| 25  |   | R2    | DIODE      |     | D754    | 6-500-488-01 | DIODE NSPW515BS                 |           |           |            |
| 26  |   | R2    | TRANSISTOR |     | Q751    | 8-729-028-73 | TRANSISTOR DTA114EUA-T106       |           |           |            |
| 27  |   | R2    | TRANSISTOR |     | Q752    | 8-729-028-73 | TRANSISTOR DTA114EUA-T106       |           |           |            |
| 28  |   | R2    | TRANSISTOR |     | Q753    | 8-729-028-73 | TRANSISTOR DTA114EUA-T106       |           |           |            |
| 29  |   | R2    | TRANSISTOR |     | Q754    | 8-729-028-73 | TRANSISTOR DTA114EUA-T106       |           |           |            |
| 30  |   | R2    | RESISTOR   |     | R751    | 1-216-809-11 | METAL CHIP 100 5% 1/10W         |           |           |            |
| 31  |   | R2    | RESISTOR   |     | R752    | 1-216-809-11 | METAL CHIP 100 5% 1/10W         |           |           |            |
| 32  |   | R2    | RESISTOR   |     | R753    | 1-216-809-11 | METAL CHIP 100 5% 1/10W         |           |           |            |
| 33  |   | R2    | RESISTOR   |     | R754    | 1-216-809-11 | METAL CHIP 100 5% 1/10W         |           |           |            |
| 34  |   | G     | CAPACITOR  |     | C1001   | 1-161-830-00 | CERAMIC 0.0047UF 99% 500V       |           |           |            |
| 35  |   | G     | CAPACITOR  |     | C1002   | 1-115-185-11 | CERAMIC CHIP 0.033UF 10.00% 50V |           |           |            |
| 36  |   | G     | CAPACITOR  |     | C1003   | 1-161-830-00 | CERAMIC 0.0047UF 99% 500V       |           |           |            |
| 37  |   | G     | CAPACITOR  |     | C1004   | 1-163-037-11 | CERAMIC CHIP 0.022UF 10.00% 50V |           |           |            |
| 38  |   | G     | CAPACITOR  |     | C1005   | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V   |           |           |            |
| 39  |   | G     | CAPACITOR  |     | C1006   | 1-107-823-11 | CERAMIC CHIP 0.47UF 10.00% 16V  |           |           |            |
| 40  |   | G     | CAPACITOR  |     | C1007   | 1-107-533-11 | MYLAR 1UF 20.00% 250V           |           |           |            |
| 41  |   | G     | CAPACITOR  |     | C1008   | 1-161-830-00 | CERAMIC 0.0047UF 99% 500V       |           |           |            |
| 42  |   | G     | CAPACITOR  |     | C1009   | 1-161-830-00 | CERAMIC 0.0047UF 99% 500V       |           |           |            |
| 43  |   | G     | CAPACITOR  |     | C1010   | 1-163-005-91 | CERAMIC CHIP 470PF 10.00% 50V   |           |           |            |

| No. | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                      | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|-----------|-----|---------|--------------|---------------------------------|-----------|-----------|------------|
| 44  |   | G     | CAPACITOR |     | C1011   | 1-161-830-00 | CERAMIC 0.0047UF 99% 500V       |           |           |            |
| 45  |   | G     | CAPACITOR |     | C1012   | 1-163-251-11 | CERAMIC CHIP 100PF 5.00% 50V    |           |           |            |
| 46  |   | G     | CAPACITOR |     | C1013   | 1-161-830-00 | CERAMIC 0.0047UF 99% 500V       |           |           |            |
| 47  |   | G     | CAPACITOR |     | C1014   | 1-117-227-11 | MYLAR 1UF 10.00% 450V           |           |           |            |
| 48  |   | G     | CAPACITOR |     | C1015   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |
| 49  |   | G     | CAPACITOR |     | C1017   | 1-126-947-11 | ELECT 47UF 20.00% 35V           |           |           |            |
| 50  |   | G     | CAPACITOR |     | C1018   | 1-117-227-11 | MYLAR 1UF 10.00% 450V           |           |           |            |
| 51  |   | G     | CAPACITOR |     | C1019   | 1-117-227-11 | MYLAR 1UF 10.00% 450V           |           |           |            |
| 52  |   | G     | CAPACITOR |     | C1020   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V  |           |           |            |
| 53  |   | G     | CAPACITOR |     | C1021   | 1-163-037-11 | CERAMIC CHIP 0.022UF 10.00% 50V |           |           |            |
| 54  |   | G     | CAPACITOR |     | C1022   | 1-104-666-11 | ELECT 220UF 20.00% 25V          |           |           |            |
| 55  |   | G     | CAPACITOR |     | C1023   | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V   |           |           |            |
| 56  |   | G     | CAPACITOR |     | C1024   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V  |           |           |            |
| 57  |   | G     | CAPACITOR |     | C1025   | 1-163-037-11 | CERAMIC CHIP 0.022UF 10.00% 50V |           |           |            |
| 58  |   | G     | CAPACITOR |     | C1026   | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V   |           |           |            |
| 59  |   | G     | CAPACITOR |     | C1027   | 1-126-964-11 | ELECT 10UF 20.00% 50V           |           |           |            |
| 60  |   | G     | CAPACITOR |     | C1028   | 1-163-275-11 | CERAMIC CHIP 0.001UF 5.00% 50V  |           |           |            |
| 61  |   | G     | CAPACITOR |     | C1029   | 1-104-760-11 | CERAMIC CHIP 0.047UF 10.00% 50V |           |           |            |
| 62  |   | G     | CAPACITOR |     | C1030   | 1-104-330-91 | CERAMIC 470PF 10.00% 1KV        |           |           |            |
| 63  |   | G     | CAPACITOR |     | C1032   | 1-163-145-00 | CERAMIC CHIP 0.0015UF 5.00% 50V |           |           |            |
| 64  |   | G     | CAPACITOR |     | C1033   | 1-104-330-91 | CERAMIC 470PF 10.00% 1KV        |           |           |            |
| 65  |   | G     | CAPACITOR |     | C1034   | 1-117-751-11 | ELECT(BLOCK) 220UF 20.00% 450V  |           |           |            |
| 66  |   | G     | CAPACITOR |     | C1035   | 1-163-037-11 | CERAMIC CHIP 0.022UF 10.00% 50V |           |           |            |
| 67  |   | G     | CAPACITOR |     | C1036   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V  |           |           |            |
| 68  |   | G     | CAPACITOR |     | C1037   | 1-117-751-11 | ELECT(BLOCK) 220UF 20.00% 450V  |           |           |            |
| 69  |   | G     | CAPACITOR |     | C1038   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V  |           |           |            |
| 70  |   | G     | CAPACITOR |     | C1039   | 1-117-751-11 | ELECT(BLOCK) 220UF 20.00% 450V  |           |           |            |
| 71  |   | G     | CAPACITOR |     | C1040   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V  |           |           |            |
| 72  |   | G     | CAPACITOR |     | C1041   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V  |           |           |            |
| 73  |   | G     | CAPACITOR |     | C1042   | 1-126-947-11 | ELECT 47UF 20.00% 35V           |           |           |            |
| 74  |   | G     | CAPACITOR |     | C1043   | 1-126-964-11 | ELECT 10UF 20.00% 50V           |           |           |            |
| 75  |   | G     | CAPACITOR |     | C1044   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V  |           |           |            |
| 76  |   | G     | CAPACITOR |     | C1045   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V  |           |           |            |
| 77  |   | G     | CAPACITOR |     | C1046   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V  |           |           |            |
| 78  |   | G     | CAPACITOR |     | C1047   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V  |           |           |            |
| 79  |   | G     | CAPACITOR |     | C1048   | 1-126-960-11 | ELECT 1UF 20.00% 50V            |           |           |            |
| 80  |   | G     | CAPACITOR |     | C1049   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V  |           |           |            |
| 81  |   | G     | CAPACITOR |     | C1050   | 1-126-948-11 | ELECT 100UF 20.00% 35V          |           |           |            |
| 82  |   | G     | CAPACITOR |     | C1051   | 1-126-968-11 | ELECT 100UF 20.00% 50V          |           |           |            |
| 83  |   | G     | CAPACITOR |     | C1052   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V  |           |           |            |
| 84  |   | G     | CAPACITOR |     | C1053   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |
| 85  |   | G     | CAPACITOR |     | C1054   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |
| 86  |   | G     | CAPACITOR |     | C1055   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |

| No. | # | Board | Type      | △/* | Ref.No. | Part No.     | Description                     | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|-----------|-----|---------|--------------|---------------------------------|-----------|-----------|------------|
| 87  |   | G     | CAPACITOR |     | C1201   | 1-137-639-71 | MYLAR 0.47UF 10% 450V           |           |           |            |
| 88  |   | G     | CAPACITOR |     | C1202   | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V   |           |           |            |
| 89  |   | G     | CAPACITOR |     | C1203   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V  |           |           |            |
| 90  |   | G     | CAPACITOR |     | C1204   | 1-126-962-11 | ELECT 3.3UF 20.00% 50V          |           |           |            |
| 91  |   | G     | CAPACITOR |     | C1205   | 1-126-951-11 | ELECT 470UF 20.00% 35V          |           |           |            |
| 92  |   | G     | CAPACITOR |     | C1206   | 1-126-962-11 | ELECT 3.3UF 20.00% 50V          |           |           |            |
| 93  |   | G     | CAPACITOR |     | C1207   | 1-136-479-11 | FILM 0.001UF 5.00% 100V         |           |           |            |
| 94  |   | G     | CAPACITOR |     | C1208   | 1-126-964-11 | ELECT 10UF 20.00% 50V           |           |           |            |
| 95  |   | G     | CAPACITOR |     | C1209   | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V        |           |           |            |
| 96  |   | G     | CAPACITOR |     | C1210   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |
| 97  |   | G     | CAPACITOR |     | C1211   | 1-136-165-00 | FILM 0.1UF 5.00% 50V            |           |           |            |
| 98  |   | G     | CAPACITOR |     | C1212   | 1-126-947-11 | ELECT 47UF 20.00% 35V           |           |           |            |
| 99  |   | G     | CAPACITOR |     | C1213   | 1-126-968-11 | ELECT 100UF 20.00% 50V          |           |           |            |
| 100 |   | G     | CAPACITOR |     | C1214   | 1-107-824-11 | CERAMIC 220PF 5.00% 1KV         |           |           |            |
| 101 |   | G     | CAPACITOR |     | C1215   | 1-107-824-11 | CERAMIC 220PF 5.00% 1KV         |           |           |            |
| 102 |   | G     | CAPACITOR |     | C1216   | 1-165-608-11 | FILM 15000PF 3% 800V            |           |           |            |
| 103 |   | G     | CAPACITOR |     | C1217   | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V   |           |           |            |
| 104 |   | G     | CAPACITOR |     | C1230   | 1-126-935-11 | ELECT 470UF 20.00% 16V          |           |           |            |
| 105 |   | G     | CAPACITOR |     | C1231   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V  |           |           |            |
| 106 |   | G     | CAPACITOR |     | C1232   | 1-126-964-11 | ELECT 10UF 20.00% 50V           |           |           |            |
| 107 |   | G     | CAPACITOR |     | C1301   | 1-128-951-31 | ELECT 2200UF 20% 16V            |           |           |            |
| 108 |   | G     | CAPACITOR |     | C1302   | 1-128-951-31 | ELECT 2200UF 20% 16V            |           |           |            |
| 109 |   | G     | CAPACITOR |     | C1303   | 1-128-549-11 | ELECT 3300UF 20.00% 35V         |           |           |            |
| 110 |   | G     | CAPACITOR |     | C1304   | 1-137-906-31 | ELECT 680UF 20% 16V             |           |           |            |
| 111 |   | G     | CAPACITOR |     | C1305   | 1-137-906-31 | ELECT 680UF 20% 16V             |           |           |            |
| 112 |   | G     | CAPACITOR |     | C1306   | 1-137-906-31 | ELECT 680UF 20% 16V             |           |           |            |
| 113 |   | G     | CAPACITOR |     | C1307   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V  |           |           |            |
| 114 |   | G     | CAPACITOR |     | C1308   | 1-137-800-31 | ELECT 560UF 20% 6.3V            |           |           |            |
| 115 |   | G     | CAPACITOR |     | C1309   | 1-163-275-11 | CERAMIC CHIP 0.001UF 5.00% 50V  |           |           |            |
| 116 |   | G     | CAPACITOR |     | C1310   | 1-128-551-11 | ELECT 22UF 20.00% 63V           |           |           |            |
| 117 |   | G     | CAPACITOR |     | C1311   | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V   |           |           |            |
| 118 |   | G     | CAPACITOR |     | C1312   | 1-163-037-11 | CERAMIC CHIP 0.022UF 10.00% 50V |           |           |            |
| 119 |   | G     | CAPACITOR |     | C1313   | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V   |           |           |            |
| 120 |   | G     | CAPACITOR |     | C1314   | 1-164-346-11 | CERAMIC CHIP 1UF 16V            |           |           |            |
| 121 |   | G     | CAPACITOR |     | C1315   | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V        |           |           |            |
| 122 |   | G     | CAPACITOR |     | C1316   | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V   |           |           |            |
| 123 |   | G     | CAPACITOR |     | C1317   | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V   |           |           |            |
| 124 |   | G     | CAPACITOR |     | C1318   | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V   |           |           |            |
| 125 |   | G     | CAPACITOR |     | C1319   | 1-100-398-21 | ELECT 270UF 20% 10V             |           |           |            |
| 126 |   | G     | CAPACITOR |     | C1320   | 1-126-926-11 | ELECT 1000UF 20.00% 10V         |           |           |            |
| 127 |   | G     | CAPACITOR |     | C1321   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V  |           |           |            |
| 128 |   | G     | CAPACITOR |     | C1322   | 1-126-947-11 | ELECT 47UF 20.00% 35V           |           |           |            |
| 129 |   | G     | CAPACITOR |     | C1323   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |

| No. | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                       | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|-----------|-----|---------|--------------|----------------------------------|-----------|-----------|------------|
| 130 |   | G     | CAPACITOR |     | C1324   | 1-107-823-11 | CERAMIC CHIP 0.47UF 10.00% 16V   |           |           |            |
| 131 |   | G     | CAPACITOR |     | C1325   | 1-161-830-00 | CERAMIC 0.0047UF 99% 500V        |           |           |            |
| 132 |   | G     | CAPACITOR |     | C1326   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V   |           |           |            |
| 133 |   | G     | CAPACITOR |     | C1327   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V   |           |           |            |
| 134 |   | G     | CAPACITOR |     | C1328   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 135 |   | G     | CAPACITOR |     | C1329   | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V    |           |           |            |
| 136 |   | G     | CAPACITOR |     | C1330   | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V    |           |           |            |
| 137 |   | G     | CAPACITOR |     | C1401   | 1-117-227-11 | MYLAR 1UF 10.00% 450V            |           |           |            |
| 138 |   | G     | CAPACITOR |     | C1402   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 139 |   | G     | CAPACITOR |     | C1403   | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V    |           |           |            |
| 140 |   | G     | CAPACITOR |     | C1404   | 1-126-965-91 | ELECT 22UF 20.00% 50V            |           |           |            |
| 141 |   | G     | CAPACITOR |     | C1405   | 1-126-967-11 | ELECT 47UF 20.00% 50V            |           |           |            |
| 142 |   | G     | CAPACITOR |     | C1406   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V   |           |           |            |
| 143 |   | G     | CAPACITOR |     | C1407   | 1-136-479-11 | FILM 0.001UF 5.00% 100V          |           |           |            |
| 144 |   | G     | CAPACITOR |     | C1408   | 1-126-964-11 | ELECT 10UF 20.00% 50V            |           |           |            |
| 145 |   | G     | CAPACITOR |     | C1409   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V   |           |           |            |
| 146 |   | G     | CAPACITOR |     | C1410   | 1-137-194-81 | FILM 0.47UF 5.00% 50V            |           |           |            |
| 147 |   | G     | CAPACITOR |     | C1411   | 1-136-165-00 | FILM 0.1UF 5.00% 50V             |           |           |            |
| 148 |   | G     | CAPACITOR |     | C1412   | 1-126-947-11 | ELECT 47UF 20.00% 35V            |           |           |            |
| 149 |   | G     | CAPACITOR |     | C1413   | 1-107-824-11 | CERAMIC 220PF 5.00% 1KV          |           |           |            |
| 150 |   | G     | CAPACITOR |     | C1414   | 1-107-824-11 | CERAMIC 220PF 5.00% 1KV          |           |           |            |
| 151 |   | G     | CAPACITOR |     | C1415   | 1-100-400-11 | FILM 39000PF 3% 1KV              |           |           |            |
| 152 |   | G     | CAPACITOR |     | C1416   | 1-119-886-51 | CERAMIC 470PF 10.00% 250V        |           |           |            |
| 153 |   | G     | CAPACITOR |     | C1417   | 1-119-886-51 | CERAMIC 470PF 10.00% 250V        |           |           |            |
| 154 |   | G     | CAPACITOR |     | C1501   | 1-165-776-31 | ELECT 680UF 20% 100V             |           |           |            |
| 155 |   | G     | CAPACITOR |     | C1502   | 1-102-244-00 | CERAMIC 220PF 10.00% 500V        |           |           |            |
| 156 |   | G     | CAPACITOR |     | C1503   | 1-165-776-31 | ELECT 680UF 20% 100V             |           |           |            |
| 157 |   | G     | CAPACITOR |     | C1504   | 1-128-567-51 | ELECT 1000UF 20.00% 100V         |           |           |            |
| 158 |   | G     | CAPACITOR |     | C1505   | 1-163-017-00 | CERAMIC CHIP 0.0047UF 10.00% 50V |           |           |            |
| 159 |   | G     | CAPACITOR |     | C1506   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 160 |   | G     | CAPACITOR |     | C1507   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 161 |   | G     | CAPACITOR |     | C1508   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V   |           |           |            |
| 162 |   | G     | CAPACITOR |     | C1601   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 163 |   | G     | CAPACITOR |     | C1602   | 1-117-228-71 | MYLAR 2.2UF 10.00% 450V          |           |           |            |
| 164 |   | G     | CAPACITOR |     | C1603   | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V    |           |           |            |
| 165 |   | G     | CAPACITOR |     | C1604   | 1-126-964-11 | ELECT 10UF 20.00% 50V            |           |           |            |
| 166 |   | G     | CAPACITOR |     | C1605   | 1-126-964-11 | ELECT 10UF 20.00% 50V            |           |           |            |
| 167 |   | G     | CAPACITOR |     | C1606   | 1-126-967-11 | ELECT 47UF 20.00% 50V            |           |           |            |
| 168 |   | G     | CAPACITOR |     | C1607   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V   |           |           |            |
| 169 |   | G     | CAPACITOR |     | C1608   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V   |           |           |            |
| 170 |   | G     | CAPACITOR |     | C1609   | 1-136-479-11 | FILM 0.001UF 5.00% 100V          |           |           |            |
| 171 |   | G     | CAPACITOR |     | C1610   | 1-126-964-11 | ELECT 10UF 20.00% 50V            |           |           |            |
| 172 |   | G     | CAPACITOR |     | C1611   | 1-137-194-81 | FILM 0.47UF 5.00% 50V            |           |           |            |

| No. | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                       | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|-----------|-----|---------|--------------|----------------------------------|-----------|-----------|------------|
| 173 |   | G     | CAPACITOR |     | C1612   | 1-136-165-00 | FILM 0.1UF 5.00% 50V             |           |           |            |
| 174 |   | G     | CAPACITOR |     | C1613   | 1-126-947-11 | ELECT 47UF 20.00% 35V            |           |           |            |
| 175 |   | G     | CAPACITOR |     | C1614   | 1-104-330-91 | CERAMIC 470PF 10.00% 1KV         |           |           |            |
| 176 |   | G     | CAPACITOR |     | C1615   | 1-104-330-91 | CERAMIC 470PF 10.00% 1KV         |           |           |            |
| 177 |   | G     | CAPACITOR |     | C1616   | 1-100-400-11 | FILM 39000PF 3% 1KV              |           |           |            |
| 178 |   | G     | CAPACITOR |     | C1617   | 1-100-400-11 | FILM 39000PF 3% 1KV              |           |           |            |
| 179 |   | G     | CAPACITOR |     | C1619   | 1-119-886-51 | CERAMIC 470PF 10.00% 250V        |           |           |            |
| 180 |   | G     | CAPACITOR |     | C1701   | 1-100-402-11 | ELECT 1000UF 20% 250V            |           |           |            |
| 181 |   | G     | CAPACITOR |     | C1702   | 1-102-244-00 | CERAMIC 220PF 10.00% 500V        |           |           |            |
| 182 |   | G     | CAPACITOR |     | C1703   | 1-163-017-00 | CERAMIC CHIP 0.0047UF 10.00% 50V |           |           |            |
| 183 |   | G     | CAPACITOR |     | C1704   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 184 |   | G     | CAPACITOR |     | C1705   | 1-100-402-11 | ELECT 1000UF 20% 250V            |           |           |            |
| 185 |   | G     | CAPACITOR |     | C1706   | 1-100-402-11 | ELECT 1000UF 20% 250V            |           |           |            |
| 186 |   | G     | CAPACITOR |     | C1707   | 1-100-402-11 | ELECT 1000UF 20% 250V            |           |           |            |
| 187 |   | G     | CAPACITOR |     | C1708   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 188 |   | G     | CAPACITOR |     | C1709   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V   |           |           |            |
| 189 |   | G     | CAPACITOR |     | C1801   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 190 |   | G     | CAPACITOR |     | C1802   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 191 |   | G     | CAPACITOR |     | C1803   | 1-165-319-11 | CERAMIC CHIP 0.1UF 50V           |           |           |            |
| 192 |   | G     | CAPACITOR |     | C1804   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V   |           |           |            |
| 193 |   | G     | CAPACITOR |     | C1805   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 194 |   | G     | CAPACITOR |     | C1806   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 195 |   | G     | CAPACITOR |     | C1807   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 196 |   | G     | CAPACITOR |     | C1808   | 1-165-319-11 | CERAMIC CHIP 0.1UF 50V           |           |           |            |
| 197 |   | G     | CAPACITOR |     | C1809   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V   |           |           |            |
| 198 |   | G     | CAPACITOR |     | C1810   | 1-126-964-11 | ELECT 10UF 20.00% 50V            |           |           |            |
| 199 |   | G     | CAPACITOR |     | C1811   | 1-126-963-11 | ELECT 4.7UF 20.00% 50V           |           |           |            |
| 200 |   | G     | CAPACITOR |     | C1812   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V   |           |           |            |
| 201 |   | G     | CAPACITOR |     | C1813   | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 202 |   | G     | CONNECTOR | *   | CN1003  | 1-580-843-11 | PIN, CONNECTOR (POWER)           |           |           |            |
| 203 |   | G     | CONNECTOR | *   | CN1005  | 1-564-705-11 | PIN, CONNECTOR (SMALL TYPE) 3P   |           |           |            |
| 204 |   | G     | CONNECTOR | *   | CN1006  | 1-766-175-11 | PIN, CONNECTOR (PC BOARD) 5P     |           |           |            |
| 205 |   | G     | CONNECTOR | *   | CN1007  | 1-564-715-11 | PIN, CONNECTOR (SMALL TYPE)13P   |           |           |            |
| 206 |   | G     | CONNECTOR | *   | CN1008  | 1-564-704-11 | PIN, CONNECTOR (SMALL TYPE) 2P   |           |           |            |
| 207 |   | G     | CONNECTOR | *   | CN1009  | 1-580-838-11 | PIN, CONNECTOR (PC BOARD) 4P     |           |           |            |
| 208 |   | G     | CONNECTOR |     | CN1010  | 1-779-092-11 | PIN, CONNECTOR (PC BOARD) 10P    |           |           |            |
| 209 |   | G     | CONNECTOR | *   | CN1011  | 1-564-705-11 | PIN, CONNECTOR (SMALL TYPE) 3P   |           |           |            |
| 210 |   | G     | DIODE     |     | D1001   | 8-719-056-84 | DIODE UDZ-TE-17-7.5B             |           |           |            |
| 211 |   | G     | DIODE     |     | D1002   | 8-719-304-63 | DIODE RM11C                      |           |           |            |
| 212 |   | G     | DIODE     |     | D1003   | 8-719-056-84 | DIODE UDZ-TE-17-7.5B             |           |           |            |
| 213 |   | G     | DIODE     |     | D1004   | 8-719-073-32 | DIODE D25XB60                    |           |           |            |
| 214 |   | G     | DIODE     |     | D1005   | 8-719-071-94 | DIODE HRU0103ATRF                |           |           |            |
| 215 |   | G     | DIODE     |     | D1006   | 8-719-071-94 | DIODE HRU0103ATRF                |           |           |            |

| No. | # | Board | Type  | △/* | Ref.No. | Part No.     | Description           | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|-------|-----|---------|--------------|-----------------------|-----------|-----------|------------|
| 216 |   | G     | DIODE |     | D1007   | 8-719-073-32 | DIODE D25XB60         |           |           |            |
| 217 |   | G     | DIODE |     | D1008   | 8-719-404-50 | DIODE MA111-TX        |           |           |            |
| 218 |   | G     | DIODE |     | D1009   | 8-719-304-63 | DIODE RM11C           |           |           |            |
| 219 |   | G     | DIODE |     | D1010   | 8-719-056-84 | DIODE UDZ-TE-17-7.5B  |           |           |            |
| 220 |   | G     | DIODE |     | D1011   | 8-719-071-94 | DIODE HRU0103ATRF     |           |           |            |
| 221 |   | G     | DIODE |     | D1012   | 8-719-041-97 | DIODE MA113-(TX)      |           |           |            |
| 222 |   | G     | DIODE |     | D1013   | 8-719-041-97 | DIODE MA113-(TX)      |           |           |            |
| 223 |   | G     | DIODE |     | D1014   | 8-719-304-63 | DIODE RM11C           |           |           |            |
| 224 |   | G     | DIODE |     | D1015   | 8-719-041-97 | DIODE MA113-(TX)      |           |           |            |
| 225 |   | G     | DIODE |     | D1016   | 6-500-407-01 | DIODE SF20L60U-4015   |           |           |            |
| 226 |   | G     | DIODE |     | D1018   | 8-719-041-97 | DIODE MA113-(TX)      |           |           |            |
| 227 |   | G     | DIODE |     | D1019   | 8-719-404-50 | DIODE MA111-TX        |           |           |            |
| 228 |   | G     | DIODE |     | D1020   | 8-719-404-50 | DIODE MA111-TX        |           |           |            |
| 229 |   | G     | DIODE |     | D1021   | 8-719-083-83 | DIODE UDZS-TE17-15B   |           |           |            |
| 230 |   | G     | DIODE |     | D1022   | 8-719-083-83 | DIODE UDZS-TE17-15B   |           |           |            |
| 231 |   | G     | DIODE |     | D1023   | 8-719-083-83 | DIODE UDZS-TE17-15B   |           |           |            |
| 232 |   | G     | DIODE |     | D1201   | 8-719-056-85 | DIODE UDZ-TE-17-8.2B  |           |           |            |
| 233 |   | G     | DIODE |     | D1204   | 8-719-404-50 | DIODE MA111-TX        |           |           |            |
| 234 |   | G     | DIODE |     | D1205   | 8-719-979-64 | DIODE UF4005PKG23     |           |           |            |
| 235 |   | G     | DIODE |     | D1206   | 8-719-083-83 | DIODE UDZS-TE17-15B   |           |           |            |
| 236 |   | G     | DIODE |     | D1207   | 8-719-083-83 | DIODE UDZS-TE17-15B   |           |           |            |
| 237 |   | G     | DIODE |     | D1208   | 8-719-063-73 | DIODE D1NL20U-TR      |           |           |            |
| 238 |   | G     | DIODE |     | D1209   | 8-719-404-50 | DIODE MA111-TX        |           |           |            |
| 239 |   | G     | DIODE |     | D1301   | 8-719-055-40 | DIODE FCQ30A04        |           |           |            |
| 240 |   | G     | DIODE |     | D1302   | 8-719-052-92 | DIODE D10SBS4F        |           |           |            |
| 241 |   | G     | DIODE |     | D1303   | 8-719-078-04 | DIODE EC31QS03L-TE12L |           |           |            |
| 242 |   | G     | DIODE |     | D1304   | 8-719-404-50 | DIODE MA111-TX        |           |           |            |
| 243 |   | G     | DIODE |     | D1305   | 8-719-404-50 | DIODE MA111-TX        |           |           |            |
| 244 |   | G     | DIODE |     | D1306   | 8-719-404-50 | DIODE MA111-TX        |           |           |            |
| 245 |   | G     | DIODE |     | D1307   | 8-719-911-19 | DIODE 1SS119-25       |           |           |            |
| 246 |   | G     | DIODE |     | D1308   | 8-719-911-19 | DIODE 1SS119-25       |           |           |            |
| 247 |   | G     | DIODE |     | D1309   | 8-719-911-19 | DIODE 1SS119-25       |           |           |            |
| 248 |   | G     | DIODE |     | D1310   | 8-719-404-50 | DIODE MA111-TX        |           |           |            |
| 249 |   | G     | DIODE |     | D1311   | 8-719-078-04 | DIODE EC31QS03L-TE12L |           |           |            |
| 250 |   | G     | DIODE |     | D1312   | 8-719-404-50 | DIODE MA111-TX        |           |           |            |
| 251 |   | G     | DIODE |     | D1313   | 8-719-404-50 | DIODE MA111-TX        |           |           |            |
| 252 |   | G     | DIODE |     | D1314   | 8-719-404-50 | DIODE MA111-TX        |           |           |            |
| 253 |   | G     | DIODE |     | D1315   | 8-719-160-29 | DIODE RD6.2FB2        |           |           |            |
| 254 |   | G     | DIODE |     | D1316   | 8-719-404-50 | DIODE MA111-TX        |           |           |            |
| 255 |   | G     | DIODE |     | D1318   | 8-719-083-83 | DIODE UDZS-TE17-15B   |           |           |            |
| 256 |   | G     | DIODE |     | D1319   | 8-719-083-83 | DIODE UDZS-TE17-15B   |           |           |            |
| 257 |   | G     | DIODE |     | D1320   | 8-719-160-20 | DIODE RD4.7FB2        |           |           |            |
| 258 |   | G     | DIODE |     | D1401   | 8-719-404-50 | DIODE MA111-TX        |           |           |            |

| No. | # | Board | Type  | △/* | Ref.No. | Part No.     | Descrption          | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|-------|-----|---------|--------------|---------------------|-----------|-----------|------------|
| 259 |   | G     | DIODE |     | D1404   | 8-719-979-64 | DIODE UF4005PKG23   |           |           |            |
| 260 |   | G     | DIODE |     | D1405   | 8-719-041-97 | DIODE MA113-(TX)    |           |           |            |
| 261 |   | G     | DIODE |     | D1406   | 8-719-041-97 | DIODE MA113-(TX)    |           |           |            |
| 262 |   | G     | DIODE |     | D1407   | 8-719-083-83 | DIODE UDZS-TE17-15B |           |           |            |
| 263 |   | G     | DIODE |     | D1408   | 8-719-083-83 | DIODE UDZS-TE17-15B |           |           |            |
| 264 |   | G     | DIODE |     | D1501   | 8-719-054-51 | DIODE D8LC20U-4012  |           |           |            |
| 265 |   | G     | DIODE |     | D1502   | 8-719-083-63 | DIODE UDZSTE-1713B  |           |           |            |
| 266 |   | G     | DIODE |     | D1503   | 8-719-059-50 | DIODE MA3J142D0LSO  |           |           |            |
| 267 |   | G     | DIODE |     | D1601   | 8-719-404-50 | DIODE MA111-TX      |           |           |            |
| 268 |   | G     | DIODE |     | D1602   | 8-719-083-82 | DIODE UDZS-TE17-12B |           |           |            |
| 269 |   | G     | DIODE |     | D1605   | 8-719-979-64 | DIODE UF4005PKG23   |           |           |            |
| 270 |   | G     | DIODE |     | D1606   | 8-719-041-97 | DIODE MA113-(TX)    |           |           |            |
| 271 |   | G     | DIODE |     | D1607   | 8-719-041-97 | DIODE MA113-(TX)    |           |           |            |
| 272 |   | G     | DIODE |     | D1608   | 8-719-083-83 | DIODE UDZS-TE17-15B |           |           |            |
| 273 |   | G     | DIODE |     | D1609   | 8-719-083-83 | DIODE UDZS-TE17-15B |           |           |            |
| 274 |   | G     | DIODE |     | D1701   | 6-500-439-01 | DIODE D8LD40-F1     |           |           |            |
| 275 |   | G     | DIODE |     | D1702   | 8-719-059-50 | DIODE MA3J142D0LSO  |           |           |            |
| 276 |   | G     | DIODE |     | D1703   | 8-719-059-50 | DIODE MA3J142D0LSO  |           |           |            |
| 277 |   | G     | DIODE |     | D1704   | 8-719-083-63 | DIODE UDZSTE-1713B  |           |           |            |
| 278 |   | G     | DIODE |     | D1801   | 8-719-404-50 | DIODE MA111-TX      |           |           |            |
| 279 |   | G     | DIODE |     | D1802   | 8-719-404-50 | DIODE MA111-TX      |           |           |            |
| 280 |   | G     | DIODE |     | D1803   | 8-719-059-50 | DIODE MA3J142D0LSO  |           |           |            |
| 281 |   | G     | DIODE |     | D1804   | 8-719-069-54 | DIODE UDZSTE-175.1B |           |           |            |
| 282 |   | G     | DIODE |     | D1805   | 8-719-041-97 | DIODE MA113-(TX)    |           |           |            |
| 283 |   | G     | DIODE |     | D1806   | 8-719-041-97 | DIODE MA113-(TX)    |           |           |            |
| 284 |   | G     | IC    |     | IC1001  | 6-703-132-01 | IC UC3854BN         |           |           |            |
| 285 |   | G     | IC    |     | IC1002  | 8-759-058-50 | IC XRA10324AF       |           |           |            |
| 286 |   | G     | IC    |     | IC1003  | 8-759-643-48 | IC BA00ASFP-E2      |           |           |            |
| 287 |   | G     | IC    |     | IC1004  | 8-759-198-31 | IC UPC1093J-1-T     |           |           |            |
| 288 |   | G     | IC    |     | IC1201  | 6-703-355-01 | IC MCZ3001DA        |           |           |            |
| 289 |   | G     | IC    |     | IC1301  | 8-759-198-31 | IC UPC1093J-1-T     |           |           |            |
| 290 |   | G     | IC    |     | IC1302  | 8-759-659-28 | IC SI-8033S         |           |           |            |
| 291 |   | G     | IC    |     | IC1303  | 8-759-643-48 | IC BA00ASFP-E2      |           |           |            |
| 292 |   | G     | IC    |     | IC1304  | 8-759-198-31 | IC UPC1093J-1-T     |           |           |            |
| 293 |   | G     | IC    |     | IC1305  | 8-759-085-67 | IC LM339NS          |           |           |            |
| 294 |   | G     | IC    |     | IC1306  | 6-703-182-01 | IC IRU3037          |           |           |            |
| 295 |   | G     | IC    |     | IC1401  | 6-703-355-01 | IC MCZ3001DA        |           |           |            |
| 296 |   | G     | IC    |     | IC1501  | 8-759-198-31 | IC UPC1093J-1-T     |           |           |            |
| 297 |   | G     | IC    |     | IC1601  | 6-703-355-01 | IC MCZ3001DA        |           |           |            |
| 298 |   | G     | IC    |     | IC1701  | 8-759-198-31 | IC UPC1093J-1-T     |           |           |            |
| 299 |   | G     | IC    |     | IC1801  | 8-759-198-31 | IC UPC1093J-1-T     |           |           |            |
| 300 |   | G     | IC    |     | IC1802  | 8-759-085-67 | IC LM339NS          |           |           |            |
| 301 |   | G     | IC    |     | IC1803  | 8-759-198-31 | IC UPC1093J-1-T     |           |           |            |

| No. | # | Board | Type          | △/* | Ref.No. | Part No.     | Descrption                  | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|---------------|-----|---------|--------------|-----------------------------|-----------|-----------|------------|
| 302 |   | G     | IC            |     | IC1804  | 8-759-085-67 | IC LM339NS                  |           |           |            |
| 303 |   | G     | COIL          |     | L1001   | 1-416-489-11 | INDUCTOR 143UH              |           |           |            |
| 304 |   | G     | COIL          |     | L1002   | 1-456-273-11 | INDUCTOR 60UH               |           |           |            |
| 305 |   | G     | COIL          |     | L1003   | 1-456-273-11 | INDUCTOR 60UH               |           |           |            |
| 306 |   | G     | COIL          |     | L1201   | 1-406-667-11 | INDUCTOR 220UH              |           |           |            |
| 307 |   | G     | COIL          |     | L1303   | 1-406-659-11 | INDUCTOR 10UH               |           |           |            |
| 308 |   | G     | COIL          |     | L1304   | 1-412-525-31 | INDUCTOR 10UH               |           |           |            |
| 309 |   | G     | COIL          |     | L1305   | 1-406-978-11 | INDUCTOR 150UH              |           |           |            |
| 310 |   | G     | COIL          |     | L1306   | 1-419-757-11 | INDUCTOR 22UH               |           |           |            |
| 311 |   | G     | COIL          |     | L1401   | 1-406-665-11 | INDUCTOR 100UH              |           |           |            |
| 312 |   | G     | COIL          |     | L1601   | 1-406-977-61 | INDUCTOR 100UH              |           |           |            |
| 313 |   | G     | COIL          |     | L1701   | 1-406-656-21 | INDUCTOR 3.3UH              |           |           |            |
| 314 |   | G     | PHOTO COUPLER |     | PH1001  | 8-749-010-64 | PHOTO COUPLER PC123F2       |           |           |            |
| 315 |   | G     | PHOTO COUPLER |     | PH1002  | 8-749-010-64 | PHOTO COUPLER PC123F2       |           |           |            |
| 316 |   | G     | PHOTO COUPLER |     | PH1201  | 8-749-010-64 | PHOTO COUPLER PC123F2       |           |           |            |
| 317 |   | G     | PHOTO COUPLER |     | PH1202  | 8-749-010-64 | PHOTO COUPLER PC123F2       |           |           |            |
| 318 |   | G     | PHOTO COUPLER |     | PH1401  | 8-749-010-64 | PHOTO COUPLER PC123F2       |           |           |            |
| 319 |   | G     | PHOTO COUPLER |     | PH1402  | 8-749-010-64 | PHOTO COUPLER PC123F2       |           |           |            |
| 320 |   | G     | PHOTO COUPLER |     | PH1601  | 8-749-010-64 | PHOTO COUPLER PC123F2       |           |           |            |
| 321 |   | G     | PHOTO COUPLER |     | PH1602  | 8-749-010-64 | PHOTO COUPLER PC123F2       |           |           |            |
| 322 |   | G     | TRANSISTOR    |     | Q1001   | 8-729-040-89 | TRANSISTOR 2SK1590-T1B      |           |           |            |
| 323 |   | G     | TRANSISTOR    |     | Q1003   | 8-729-820-86 | TRANSISTOR 2SB1121-ST       |           |           |            |
| 324 |   | G     | TRANSISTOR    |     | Q1004   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 325 |   | G     | TRANSISTOR    |     | Q1005   | 8-729-807-17 | TRANSISTOR 2SD1621-S        |           |           |            |
| 326 |   | G     | TRANSISTOR    |     | Q1006   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 327 |   | G     | TRANSISTOR    |     | Q1007   | 6-550-372-01 | TRANSISTOR SPA20N60C3 E8152 |           |           |            |
| 328 |   | G     | TRANSISTOR    |     | Q1008   | 6-550-372-01 | TRANSISTOR SPA20N60C3 E8152 |           |           |            |
| 329 |   | G     | TRANSISTOR    |     | Q1009   | 6-550-372-01 | TRANSISTOR SPA20N60C3 E8152 |           |           |            |
| 330 |   | G     | TRANSISTOR    |     | Q1010   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 331 |   | G     | TRANSISTOR    |     | Q1011   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 332 |   | G     | TRANSISTOR    |     | Q1012   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 333 |   | G     | TRANSISTOR    |     | Q1013   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 334 |   | G     | TRANSISTOR    |     | Q1014   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 335 |   | G     | TRANSISTOR    |     | Q1015   | 8-729-023-22 | TRANSISTOR 2SD2114K         |           |           |            |
| 336 |   | G     | TRANSISTOR    |     | Q1016   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 337 |   | G     | TRANSISTOR    |     | Q1017   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 338 |   | G     | TRANSISTOR    |     | Q1018   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 339 |   | G     | TRANSISTOR    |     | Q1019   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 340 |   | G     | TRANSISTOR    |     | Q1020   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 341 |   | G     | TRANSISTOR    |     | Q1021   | 8-729-023-22 | TRANSISTOR 2SD2114K         |           |           |            |
| 342 |   | G     | TRANSISTOR    |     | Q1022   | 8-729-023-22 | TRANSISTOR 2SD2114K         |           |           |            |
| 343 |   | G     | TRANSISTOR    |     | Q1023   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 344 |   | G     | TRANSISTOR    |     | Q1024   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |



| No. | # | Board | Type       | △/* | Ref.No. | Part No.     | Descrption                  | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|------------|-----|---------|--------------|-----------------------------|-----------|-----------|------------|
| 345 |   | G     | TRANSISTOR |     | Q1201   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 346 |   | G     | TRANSISTOR |     | Q1202   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 347 |   | G     | TRANSISTOR |     | Q1203   | 8-729-052-32 | TRANSISTOR IRFIB7N50A-LF31  |           |           |            |
| 348 |   | G     | TRANSISTOR |     | Q1204   | 8-729-052-32 | TRANSISTOR IRFIB7N50A-LF31  |           |           |            |
| 349 |   | G     | TRANSISTOR |     | Q1205   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 350 |   | G     | TRANSISTOR |     | Q1206   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 351 |   | G     | TRANSISTOR |     | Q1207   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 352 |   | G     | TRANSISTOR |     | Q1301   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 353 |   | G     | TRANSISTOR |     | Q1302   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 354 |   | G     | TRANSISTOR |     | Q1303   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 355 |   | G     | TRANSISTOR |     | Q1304   | 6-550-373-01 | TRANSISTOR IRF3707          |           |           |            |
| 356 |   | G     | TRANSISTOR |     | Q1305   | 8-729-054-35 | TRANSISTOR HAT2070R-EL      |           |           |            |
| 357 |   | G     | TRANSISTOR |     | Q1306   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 358 |   | G     | TRANSISTOR |     | Q1307   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 359 |   | G     | TRANSISTOR |     | Q1308   | 6-550-380-01 | TRANSISTOR IRFR5305TR       |           |           |            |
| 360 |   | G     | TRANSISTOR |     | Q1309   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 361 |   | G     | TRANSISTOR |     | Q1401   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 362 |   | G     | TRANSISTOR |     | Q1402   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 363 |   | G     | TRANSISTOR |     | Q1403   | 8-729-820-86 | TRANSISTOR 2SB1121-ST       |           |           |            |
| 364 |   | G     | TRANSISTOR |     | Q1404   | 8-729-820-86 | TRANSISTOR 2SB1121-ST       |           |           |            |
| 365 |   | G     | TRANSISTOR |     | Q1405   | 6-550-372-01 | TRANSISTOR SPA20N60C3 E8152 |           |           |            |
| 366 |   | G     | TRANSISTOR |     | Q1406   | 6-550-372-01 | TRANSISTOR SPA20N60C3 E8152 |           |           |            |
| 367 |   | G     | TRANSISTOR |     | Q1501   | 8-729-044-42 | TRANSISTOR IRFI644G-LF36    |           |           |            |
| 368 |   | G     | TRANSISTOR |     | Q1502   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 369 |   | G     | TRANSISTOR |     | Q1503   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 370 |   | G     | TRANSISTOR |     | Q1504   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 371 |   | G     | TRANSISTOR |     | Q1601   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 372 |   | G     | TRANSISTOR |     | Q1602   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 373 |   | G     | TRANSISTOR |     | Q1603   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 374 |   | G     | TRANSISTOR |     | Q1604   | 8-729-820-86 | TRANSISTOR 2SB1121-ST       |           |           |            |
| 375 |   | G     | TRANSISTOR |     | Q1605   | 8-729-820-86 | TRANSISTOR 2SB1121-ST       |           |           |            |
| 376 |   | G     | TRANSISTOR |     | Q1606   | 6-550-372-01 | TRANSISTOR SPA20N60C3 E8152 |           |           |            |
| 377 |   | G     | TRANSISTOR |     | Q1607   | 6-550-372-01 | TRANSISTOR SPA20N60C3 E8152 |           |           |            |
| 378 |   | G     | TRANSISTOR |     | Q1701   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 379 |   | G     | TRANSISTOR |     | Q1702   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 380 |   | G     | TRANSISTOR |     | Q1704   | 8-729-044-42 | TRANSISTOR IRFI644G-LF36    |           |           |            |
| 381 |   | G     | TRANSISTOR |     | Q1705   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 382 |   | G     | TRANSISTOR |     | Q1801   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 383 |   | G     | TRANSISTOR |     | Q1802   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 384 |   | G     | TRANSISTOR |     | Q1803   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 385 |   | G     | TRANSISTOR |     | Q1804   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 386 |   | G     | TRANSISTOR |     | Q1805   | 8-729-054-34 | TRANSISTOR FDN304P          |           |           |            |
| 387 |   | G     | TRANSISTOR |     | Q1806   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |

| No. | # | Board | Type       | △/* | Ref.No. | Part No.     | Descrption                  | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|------------|-----|---------|--------------|-----------------------------|-----------|-----------|------------|
| 388 |   | G     | TRANSISTOR |     | Q1807   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 389 |   | G     | TRANSISTOR |     | Q1808   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 390 |   | G     | TRANSISTOR |     | Q1809   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 391 |   | G     | TRANSISTOR |     | Q1810   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 392 |   | G     | TRANSISTOR |     | Q1811   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 393 |   | G     | RESISTOR   |     | R1001   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W      |           |           |            |
| 394 |   | G     | RESISTOR   |     | R1002   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W      |           |           |            |
| 395 |   | G     | RESISTOR   |     | R1003   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W      |           |           |            |
| 396 |   | G     | RESISTOR   |     | R1004   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W      |           |           |            |
| 397 |   | G     | RESISTOR   |     | R1005   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W      |           |           |            |
| 398 |   | G     | RESISTOR   |     | R1006   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W      |           |           |            |
| 399 |   | G     | RESISTOR   |     | R1007   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W      |           |           |            |
| 400 |   | G     | RESISTOR   |     | R1008   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W      |           |           |            |
| 401 |   | G     | RESISTOR   |     | R1009   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W      |           |           |            |
| 402 |   | G     | RESISTOR   |     | R1010   | 1-216-699-91 | METAL CHIP 100K 0.5% 1/10W  |           |           |            |
| 403 |   | G     | RESISTOR   |     | R1011   | 1-216-079-00 | RES-CHIP 18K 5% 1/10W       |           |           |            |
| 404 |   | G     | RESISTOR   |     | R1012   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W      |           |           |            |
| 405 |   | G     | RESISTOR   |     | R1013   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W      |           |           |            |
| 406 |   | G     | RESISTOR   |     | R1014   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W      |           |           |            |
| 407 |   | G     | RESISTOR   |     | R1015   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W      |           |           |            |
| 408 |   | G     | RESISTOR   |     | R1016   | 1-216-057-00 | RES-CHIP 2.2K 5% 1/10W      |           |           |            |
| 409 |   | G     | RESISTOR   |     | R1017   | 1-216-650-11 | METAL CHIP 910 0.5% 1/10W   |           |           |            |
| 410 |   | G     | RESISTOR   |     | R1018   | 1-216-121-11 | RES-CHIP 1M 5% 1/10W        |           |           |            |
| 411 |   | G     | RESISTOR   |     | R1019   | 1-216-075-00 | RES-CHIP 12K 5% 1/10W       |           |           |            |
| 412 |   | G     | RESISTOR   |     | R1020   | 1-216-067-00 | RES-CHIP 5.6K 5% 1/10W      |           |           |            |
| 413 |   | G     | RESISTOR   |     | R1021   | 1-216-121-11 | RES-CHIP 1M 5% 1/10W        |           |           |            |
| 414 |   | G     | RESISTOR   |     | R1023   | 1-216-081-00 | RES-CHIP 22K 5% 1/10W       |           |           |            |
| 415 |   | G     | RESISTOR   |     | R1024   | 1-202-972-61 | FUSIBLE 1 5% 1/4W           |           |           |            |
| 416 |   | G     | RESISTOR   |     | R1025   | 1-219-393-11 | METAL 0.05 10% 5W           |           |           |            |
| 417 |   | G     | RESISTOR   |     | R1026   | 1-219-393-11 | METAL 0.05 10% 5W           |           |           |            |
| 418 |   | G     | RESISTOR   |     | R1027   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W       |           |           |            |
| 419 |   | G     | RESISTOR   |     | R1028   | 1-216-308-00 | RES-CHIP 4.7 5% 1/10W       |           |           |            |
| 420 |   | G     | RESISTOR   |     | R1029   | 1-249-393-11 | CARBON 10 5% 1/4W           |           |           |            |
| 421 |   | G     | RESISTOR   |     | R1030   | 1-216-308-00 | RES-CHIP 4.7 5% 1/10W       |           |           |            |
| 422 |   | G     | RESISTOR   |     | R1031   | 1-216-057-00 | RES-CHIP 2.2K 5% 1/10W      |           |           |            |
| 423 |   | G     | RESISTOR   |     | R1032   | 1-249-393-11 | CARBON 10 5% 1/4W           |           |           |            |
| 424 |   | G     | RESISTOR   |     | R1033   | 1-249-393-11 | CARBON 10 5% 1/4W           |           |           |            |
| 425 |   | G     | RESISTOR   |     | R1034   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W       |           |           |            |
| 426 |   | G     | RESISTOR   |     | R1035   | 1-249-405-11 | CARBON 100 5% 1/4W          |           |           |            |
| 427 |   | G     | RESISTOR   |     | R1036   | 1-249-393-11 | CARBON 10 5% 1/4W           |           |           |            |
| 428 |   | G     | RESISTOR   |     | R1037   | 1-216-081-00 | RES-CHIP 22K 5% 1/10W       |           |           |            |
| 429 |   | G     | RESISTOR   |     | R1038   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W       |           |           |            |
| 430 |   | G     | RESISTOR   |     | R1039   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W      |           |           |            |

| No. | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption                 | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|----------|-----|---------|--------------|----------------------------|-----------|-----------|------------|
| 431 |   | G     | RESISTOR |     | R1041   | 1-216-065-91 | RES-CHIP 4.7K 5% 1/10W     |           |           |            |
| 432 |   | G     | RESISTOR |     | R1042   | 1-216-081-00 | RES-CHIP 22K 5% 1/10W      |           |           |            |
| 433 |   | G     | RESISTOR |     | R1043   | 1-216-308-00 | RES-CHIP 4.7 5% 1/10W      |           |           |            |
| 434 |   | G     | RESISTOR |     | R1044   | 1-216-065-91 | RES-CHIP 4.7K 5% 1/10W     |           |           |            |
| 435 |   | G     | RESISTOR |     | R1045   | 1-216-081-00 | RES-CHIP 22K 5% 1/10W      |           |           |            |
| 436 |   | G     | RESISTOR |     | R1046   | 1-249-393-11 | CARBON 10 5% 1/4W          |           |           |            |
| 437 |   | G     | RESISTOR |     | R1047   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 438 |   | G     | RESISTOR |     | R1048   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 439 |   | G     | RESISTOR |     | R1049   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 440 |   | G     | RESISTOR |     | R1050   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 441 |   | G     | RESISTOR |     | R1051   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 442 |   | G     | RESISTOR |     | R1052   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 443 |   | G     | RESISTOR |     | R1053   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 444 |   | G     | RESISTOR |     | R1054   | 1-216-655-11 | METAL CHIP 1.5K 0.5% 1/10W |           |           |            |
| 445 |   | G     | RESISTOR |     | R1055   | 1-208-801-11 | METAL CHIP 6.2K 0.5% 1/10W |           |           |            |
| 446 |   | G     | RESISTOR |     | R1056   | 1-215-882-00 | METAL OXIDE 22 5% 2W       |           |           |            |
| 447 |   | G     | RESISTOR |     | R1057   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 448 |   | G     | RESISTOR |     | R1058   | 1-216-077-91 | RES-CHIP 15K 5% 1/10W      |           |           |            |
| 449 |   | G     | RESISTOR |     | R1059   | 1-216-081-00 | RES-CHIP 22K 5% 1/10W      |           |           |            |
| 450 |   | G     | RESISTOR |     | R1060   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 451 |   | G     | RESISTOR |     | R1061   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 452 |   | G     | RESISTOR |     | R1062   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 453 |   | G     | RESISTOR |     | R1063   | 1-216-089-91 | RES-CHIP 47K 5% 1/10W      |           |           |            |
| 454 |   | G     | RESISTOR |     | R1064   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 455 |   | G     | RESISTOR |     | R1065   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 456 |   | G     | RESISTOR |     | R1066   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 457 |   | G     | RESISTOR |     | R1067   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 458 |   | G     | RESISTOR |     | R1068   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 459 |   | G     | RESISTOR |     | R1069   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 460 |   | G     | RESISTOR |     | R1070   | 1-216-101-00 | RES-CHIP 150K 5% 1/10W     |           |           |            |
| 461 |   | G     | RESISTOR |     | R1071   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 462 |   | G     | RESISTOR |     | R1072   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 463 |   | G     | RESISTOR |     | R1073   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 464 |   | G     | RESISTOR |     | R1074   | 1-216-089-91 | RES-CHIP 47K 5% 1/10W      |           |           |            |
| 465 |   | G     | RESISTOR |     | R1075   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 466 |   | G     | RESISTOR |     | R1076   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 467 |   | G     | RESISTOR |     | R1077   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 468 |   | G     | RESISTOR |     | R1078   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 469 |   | G     | RESISTOR |     | R1079   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 470 |   | G     | RESISTOR |     | R1080   | 1-216-295-91 | SHORT CHIP 0               |           |           |            |
| 471 |   | G     | RESISTOR |     | R1081   | 1-216-295-91 | SHORT CHIP 0               |           |           |            |
| 472 |   | G     | RESISTOR |     | R1082   | 1-216-065-91 | RES-CHIP 4.7K 5% 1/10W     |           |           |            |
| 473 |   | G     | RESISTOR |     | R1083   | 1-216-065-91 | RES-CHIP 4.7K 5% 1/10W     |           |           |            |

| No. | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption                 | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|----------|-----|---------|--------------|----------------------------|-----------|-----------|------------|
| 474 |   | G     | RESISTOR |     | R1084   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 475 |   | G     | RESISTOR |     | R1085   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 476 |   | G     | RESISTOR |     | R1087   | 1-216-089-91 | RES-CHIP 47K 5% 1/10W      |           |           |            |
| 477 |   | G     | RESISTOR |     | R1088   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W     |           |           |            |
| 478 |   | G     | RESISTOR |     | R1089   | 1-216-001-00 | RES-CHIP 10 5% 1/10W       |           |           |            |
| 479 |   | G     | RESISTOR |     | R1090   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 480 |   | G     | RESISTOR |     | R1091   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 481 |   | G     | RESISTOR |     | R1092   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 482 |   | G     | RESISTOR |     | R1093   | 1-216-065-91 | RES-CHIP 4.7K 5% 1/10W     |           |           |            |
| 483 |   | G     | RESISTOR |     | R1094   | 1-216-065-91 | RES-CHIP 4.7K 5% 1/10W     |           |           |            |
| 484 |   | G     | RESISTOR |     | R1095   | 1-240-251-11 | CEMENTED 6.8 5% 10W        |           |           |            |
| 485 |   | G     | RESISTOR |     | R1096   | 1-240-251-11 | CEMENTED 6.8 5% 10W        |           |           |            |
| 486 |   | G     | RESISTOR |     | R1097   | 1-216-635-11 | METAL CHIP 220 0.5% 1/10W  |           |           |            |
| 487 |   | G     | RESISTOR |     | R1098   | 1-208-798-11 | METAL CHIP 4.7K 0.5% 1/10W |           |           |            |
| 488 |   | G     | RESISTOR |     | R1099   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 489 |   | G     | RESISTOR |     | R1100   | 1-216-655-11 | METAL CHIP 1.5K 0.5% 1/10W |           |           |            |
| 490 |   | G     | RESISTOR |     | R1101   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 491 |   | G     | RESISTOR |     | R1102   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 492 |   | G     | RESISTOR |     | R1103   | 1-216-089-91 | RES-CHIP 47K 5% 1/10W      |           |           |            |
| 493 |   | G     | RESISTOR |     | R1104   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 494 |   | G     | RESISTOR |     | R1105   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 495 |   | G     | RESISTOR |     | R1106   | 1-208-804-11 | METAL CHIP 8.2K 0.5% 1/10W |           |           |            |
| 496 |   | G     | RESISTOR |     | R1107   | 1-216-081-00 | RES-CHIP 22K 5% 1/10W      |           |           |            |
| 497 |   | G     | RESISTOR |     | R1108   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 498 |   | G     | RESISTOR |     | R1109   | 1-216-121-11 | RES-CHIP 1M 5% 1/10W       |           |           |            |
| 499 |   | G     | RESISTOR |     | R1110   | 1-216-121-11 | RES-CHIP 1M 5% 1/10W       |           |           |            |
| 500 |   | G     | RESISTOR |     | R1111   | 1-216-121-11 | RES-CHIP 1M 5% 1/10W       |           |           |            |
| 501 |   | G     | RESISTOR |     | R1112   | 1-216-121-11 | RES-CHIP 1M 5% 1/10W       |           |           |            |
| 502 |   | G     | RESISTOR |     | R1201   | 1-202-933-61 | FUSE 0.1 10% 1/2W          |           |           |            |
| 503 |   | G     | RESISTOR |     | R1202   | 1-208-812-11 | METAL CHIP 18K 0.5% 1/10W  |           |           |            |
| 504 |   | G     | RESISTOR |     | R1203   | 1-216-089-91 | RES-CHIP 47K 5% 1/10W      |           |           |            |
| 505 |   | G     | RESISTOR |     | R1204   | 1-216-089-91 | RES-CHIP 47K 5% 1/10W      |           |           |            |
| 506 |   | G     | RESISTOR |     | R1205   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 507 |   | G     | RESISTOR |     | R1206   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 508 |   | G     | RESISTOR |     | R1207   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 509 |   | G     | RESISTOR |     | R1208   | 1-216-065-91 | RES-CHIP 4.7K 5% 1/10W     |           |           |            |
| 510 |   | G     | RESISTOR |     | R1209   | 1-216-041-00 | RES-CHIP 470 5% 1/10W      |           |           |            |
| 511 |   | G     | RESISTOR |     | R1210   | 1-216-676-11 | METAL CHIP 11K 0.5% 1/10W  |           |           |            |
| 512 |   | G     | RESISTOR |     | R1212   | 1-216-089-91 | RES-CHIP 47K 5% 1/10W      |           |           |            |
| 513 |   | G     | RESISTOR |     | R1214   | 1-216-097-11 | RES-CHIP 100K 5% 1/10W     |           |           |            |
| 514 |   | G     | RESISTOR |     | R1215   | 1-216-295-91 | SHORT CHIP 0               |           |           |            |
| 515 |   | G     | RESISTOR |     | R1216   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 516 |   | G     | RESISTOR |     | R1217   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |

| No. | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption                 | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|----------|-----|---------|--------------|----------------------------|-----------|-----------|------------|
| 517 |   | G     | RESISTOR |     | R1218   | 1-216-025-11 | RES-CHIP 100 5% 1/10W      |           |           |            |
| 518 |   | G     | RESISTOR |     | R1219   | 1-216-017-91 | RES-CHIP 47 5% 1/10W       |           |           |            |
| 519 |   | G     | RESISTOR |     | R1220   | 1-249-417-11 | CARBON 1K 5% 1/4W          |           |           |            |
| 520 |   | G     | RESISTOR |     | R1221   | 1-216-061-91 | RES-CHIP 3.3K 5% 1/10W     |           |           |            |
| 521 |   | G     | RESISTOR |     | R1222   | 1-216-061-91 | RES-CHIP 3.3K 5% 1/10W     |           |           |            |
| 522 |   | G     | RESISTOR |     | R1223   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 523 |   | G     | RESISTOR |     | R1224   | 1-249-393-11 | CARBON 10 5% 1/4W          |           |           |            |
| 524 |   | G     | RESISTOR |     | R1225   | 1-249-393-11 | CARBON 10 5% 1/4W          |           |           |            |
| 525 |   | G     | RESISTOR |     | R1226   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 526 |   | G     | RESISTOR |     | R1227   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 527 |   | G     | RESISTOR |     | R1228   | 1-260-304-51 | CARBON 10 5% 1/2W          |           |           |            |
| 528 |   | G     | RESISTOR |     | R1229   | 1-217-611-00 | METAL 0.1 10% 2W           |           |           |            |
| 529 |   | G     | RESISTOR |     | R1230   | 1-216-081-00 | RES-CHIP 22K 5% 1/10W      |           |           |            |
| 530 |   | G     | RESISTOR |     | R1231   | 1-208-836-11 | METAL CHIP 180K 0.5% 1/10W |           |           |            |
| 531 |   | G     | RESISTOR |     | R1232   | 1-216-089-91 | RES-CHIP 47K 5% 1/10W      |           |           |            |
| 532 |   | G     | RESISTOR |     | R1233   | 1-216-065-91 | RES-CHIP 4.7K 5% 1/10W     |           |           |            |
| 533 |   | G     | RESISTOR |     | R1234   | 1-216-025-11 | RES-CHIP 100 5% 1/10W      |           |           |            |
| 534 |   | G     | RESISTOR |     | R1235   | 1-216-097-11 | RES-CHIP 100K 5% 1/10W     |           |           |            |
| 535 |   | G     | RESISTOR |     | R1236   | 1-216-089-91 | RES-CHIP 47K 5% 1/10W      |           |           |            |
| 536 |   | G     | RESISTOR |     | R1238   | 1-208-836-11 | METAL CHIP 180K 0.5% 1/10W |           |           |            |
| 537 |   | G     | RESISTOR |     | R1239   | 1-208-836-11 | METAL CHIP 180K 0.5% 1/10W |           |           |            |
| 538 |   | G     | RESISTOR |     | R1301   | 1-216-308-00 | RES-CHIP 4.7 5% 1/10W      |           |           |            |
| 539 |   | G     | RESISTOR |     | R1302   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 540 |   | G     | RESISTOR |     | R1303   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 541 |   | G     | RESISTOR |     | R1304   | 1-216-611-11 | METAL CHIP 22 0.5% 1/10W   |           |           |            |
| 542 |   | G     | RESISTOR |     | R1305   | 1-216-295-91 | SHORT CHIP 0               |           |           |            |
| 543 |   | G     | RESISTOR |     | R1306   | 1-216-687-11 | METAL CHIP 33K 0.5% 1/10W  |           |           |            |
| 544 |   | G     | RESISTOR |     | R1307   | 1-216-673-11 | METAL CHIP 8.2K 0.5% 1/10W |           |           |            |
| 545 |   | G     | RESISTOR |     | R1310   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 546 |   | G     | RESISTOR |     | R1311   | 1-216-682-11 | METAL CHIP 20K 0.5% 1/10W  |           |           |            |
| 547 |   | G     | RESISTOR |     | R1312   | 1-216-665-11 | METAL CHIP 3.9K 0.5% 1/10W |           |           |            |
| 548 |   | G     | RESISTOR |     | R1314   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 549 |   | G     | RESISTOR |     | R1317   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 550 |   | G     | RESISTOR |     | R1318   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 551 |   | G     | RESISTOR |     | R1319   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 552 |   | G     | RESISTOR |     | R1320   | 1-216-065-91 | RES-CHIP 4.7K 5% 1/10W     |           |           |            |
| 553 |   | G     | RESISTOR |     | R1321   | 1-216-065-91 | RES-CHIP 4.7K 5% 1/10W     |           |           |            |
| 554 |   | G     | RESISTOR |     | R1322   | 1-216-667-11 | METAL CHIP 4.7K 0.5% 1/10W |           |           |            |
| 555 |   | G     | RESISTOR |     | R1323   | 1-216-651-11 | METAL CHIP 1K 0.5% 1/10W   |           |           |            |
| 556 |   | G     | RESISTOR |     | R1324   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 557 |   | G     | RESISTOR |     | R1325   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 558 |   | G     | RESISTOR |     | R1326   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 559 |   | G     | RESISTOR |     | R1327   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |

| No. | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption                 | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|----------|-----|---------|--------------|----------------------------|-----------|-----------|------------|
| 560 |   | G     | RESISTOR |     | R1328   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 561 |   | G     | RESISTOR |     | R1329   | 1-216-659-11 | METAL CHIP 2.2K 0.5% 1/10W |           |           |            |
| 562 |   | G     | RESISTOR |     | R1330   | 1-216-651-11 | METAL CHIP 1K 0.5% 1/10W   |           |           |            |
| 563 |   | G     | RESISTOR |     | R1331   | 1-216-085-91 | RES-CHIP 33K 5% 1/10W      |           |           |            |
| 564 |   | G     | RESISTOR |     | R1332   | 1-216-295-91 | SHORT CHIP 0               |           |           |            |
| 565 |   | G     | RESISTOR |     | R1333   | 1-216-295-91 | SHORT CHIP 0               |           |           |            |
| 566 |   | G     | RESISTOR |     | R1334   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 567 |   | G     | RESISTOR |     | R1335   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 568 |   | G     | RESISTOR |     | R1336   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 569 |   | G     | RESISTOR |     | R1337   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 570 |   | G     | RESISTOR |     | R1338   | 1-216-065-91 | RES-CHIP 4.7K 5% 1/10W     |           |           |            |
| 571 |   | G     | RESISTOR |     | R1339   | 1-216-667-11 | METAL CHIP 4.7K 0.5% 1/10W |           |           |            |
| 572 |   | G     | RESISTOR |     | R1340   | 1-216-665-11 | METAL CHIP 3.9K 0.5% 1/10W |           |           |            |
| 573 |   | G     | RESISTOR |     | R1341   | 1-216-675-91 | METAL CHIP 10K 0.5% 1/10W  |           |           |            |
| 574 |   | G     | RESISTOR |     | R1342   | 1-216-663-11 | METAL CHIP 3.3K 0.5% 1/10W |           |           |            |
| 575 |   | G     | RESISTOR |     | R1343   | 1-216-677-11 | METAL CHIP 12K 0.5% 1/10W  |           |           |            |
| 576 |   | G     | RESISTOR |     | R1344   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 577 |   | G     | RESISTOR |     | R1345   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 578 |   | G     | RESISTOR |     | R1346   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 579 |   | G     | RESISTOR |     | R1347   | 1-207-923-00 | WIREWOUND 27 10% 3W        |           |           |            |
| 580 |   | G     | RESISTOR |     | R1348   | 1-216-097-11 | RES-CHIP 100K 5% 1/10W     |           |           |            |
| 581 |   | G     | RESISTOR |     | R1349   | 1-216-103-00 | RES-CHIP 180K 5% 1/10W     |           |           |            |
| 582 |   | G     | RESISTOR |     | R1350   | 1-216-089-91 | RES-CHIP 47K 5% 1/10W      |           |           |            |
| 583 |   | G     | RESISTOR |     | R1351   | 1-216-089-91 | RES-CHIP 47K 5% 1/10W      |           |           |            |
| 584 |   | G     | RESISTOR |     | R1353   | 1-216-089-91 | RES-CHIP 47K 5% 1/10W      |           |           |            |
| 585 |   | G     | RESISTOR |     | R1354   | 1-216-689-11 | METAL CHIP 39K 0.5% 1/10W  |           |           |            |
| 586 |   | G     | RESISTOR |     | R1401   | 1-216-089-91 | RES-CHIP 47K 5% 1/10W      |           |           |            |
| 587 |   | G     | RESISTOR |     | R1402   | 1-249-405-11 | CARBON 100 5% 1/4W         |           |           |            |
| 588 |   | G     | RESISTOR |     | R1403   | 1-202-933-61 | FUSE 0.1 10% 1/2W          |           |           |            |
| 589 |   | G     | RESISTOR |     | R1404   | 1-208-798-11 | METAL CHIP 4.7K 0.5% 1/10W |           |           |            |
| 590 |   | G     | RESISTOR |     | R1405   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 591 |   | G     | RESISTOR |     | R1406   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 592 |   | G     | RESISTOR |     | R1407   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 593 |   | G     | RESISTOR |     | R1408   | 1-216-041-00 | RES-CHIP 470 5% 1/10W      |           |           |            |
| 594 |   | G     | RESISTOR |     | R1410   | 1-216-678-11 | METAL CHIP 13K 0.5% 1/10W  |           |           |            |
| 595 |   | G     | RESISTOR |     | R1411   | 1-216-623-11 | METAL CHIP 68 0.5% 1/10W   |           |           |            |
| 596 |   | G     | RESISTOR |     | R1412   | 1-216-627-11 | METAL CHIP 100 0.5% 1/10W  |           |           |            |
| 597 |   | G     | RESISTOR |     | R1413   | 1-249-393-11 | CARBON 10 5% 1/4W          |           |           |            |
| 598 |   | G     | RESISTOR |     | R1414   | 1-249-393-11 | CARBON 10 5% 1/4W          |           |           |            |
| 599 |   | G     | RESISTOR |     | R1415   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 600 |   | G     | RESISTOR |     | R1416   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 601 |   | G     | RESISTOR |     | R1417   | 1-217-625-00 | METAL 0.05 10% 2W          |           |           |            |
| 602 |   | G     | RESISTOR |     | R1418   | 1-216-041-00 | RES-CHIP 470 5% 1/10W      |           |           |            |

| No. | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption                 | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|----------|-----|---------|--------------|----------------------------|-----------|-----------|------------|
| 603 |   | G     | RESISTOR |     | R1419   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W     |           |           |            |
| 604 |   | G     | RESISTOR |     | R1420   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W     |           |           |            |
| 605 |   | G     | RESISTOR |     | R1421   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W     |           |           |            |
| 606 |   | G     | RESISTOR |     | R1422   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W     |           |           |            |
| 607 |   | G     | RESISTOR |     | R1423   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W     |           |           |            |
| 608 |   | G     | RESISTOR |     | R1424   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W     |           |           |            |
| 609 |   | G     | RESISTOR |     | R1425   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W     |           |           |            |
| 610 |   | G     | RESISTOR |     | R1426   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W     |           |           |            |
| 611 |   | G     | RESISTOR |     | R1427   | 1-208-836-11 | METAL CHIP 180K 0.5% 1/10W |           |           |            |
| 612 |   | G     | RESISTOR |     | R1428   | 1-208-836-11 | METAL CHIP 180K 0.5% 1/10W |           |           |            |
| 613 |   | G     | RESISTOR |     | R1429   | 1-208-836-11 | METAL CHIP 180K 0.5% 1/10W |           |           |            |
| 614 |   | G     | RESISTOR |     | R1501   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 615 |   | G     | RESISTOR |     | R1502   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 616 |   | G     | RESISTOR |     | R1503   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 617 |   | G     | RESISTOR |     | R1504   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 618 |   | G     | RESISTOR |     | R1505   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 619 |   | G     | RESISTOR |     | R1506   | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W |           |           |            |
| 620 |   | G     | RESISTOR |     | R1507   | 1-218-760-11 | METAL CHIP 220K 0.5% 1/10W |           |           |            |
| 621 |   | G     | RESISTOR |     | R1508   | 1-208-806-11 | METAL CHIP 10K 0.5% 1/10W  |           |           |            |
| 622 |   | G     | RESISTOR |     | R1509   | 1-202-962-11 | CEMENTED 3.3 5% 10W        |           |           |            |
| 623 |   | G     | RESISTOR |     | R1509   | 1-202-962-11 | CEMENTED 3.3 5% 10W        |           |           |            |
| 624 |   | G     | RESISTOR |     | R1510   | 1-216-089-91 | RES-CHIP 47K 5% 1/10W      |           |           |            |
| 625 |   | G     | RESISTOR |     | R1511   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 626 |   | G     | RESISTOR |     | R1512   | 1-216-065-91 | RES-CHIP 4.7K 5% 1/10W     |           |           |            |
| 627 |   | G     | RESISTOR |     | R1513   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 628 |   | G     | RESISTOR |     | R1514   | 1-215-900-11 | METAL OXIDE 22K 5% 2W      |           |           |            |
| 629 |   | G     | RESISTOR |     | R1515   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 630 |   | G     | RESISTOR |     | R1516   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 631 |   | G     | RESISTOR |     | R1517   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 632 |   | G     | RESISTOR |     | R1518   | 1-208-832-11 | METAL CHIP 120K 0.5% 1/10W |           |           |            |
| 633 |   | G     | RESISTOR |     | R1519   | 1-216-001-00 | RES-CHIP 10 5% 1/10W       |           |           |            |
| 634 |   | G     | RESISTOR |     | R1530   | 1-220-893-11 | METAL 0.22 10% 5W          |           |           |            |
| 635 |   | G     | RESISTOR |     | R1601   | 1-216-089-91 | RES-CHIP 47K 5% 1/10W      |           |           |            |
| 636 |   | G     | RESISTOR |     | R1602   | 1-249-405-11 | CARBON 100 5% 1/4W         |           |           |            |
| 637 |   | G     | RESISTOR |     | R1603   | 1-220-886-11 | FUSIBLE 0.1 10% 1W         |           |           |            |
| 638 |   | G     | RESISTOR |     | R1604   | 1-208-800-11 | METAL CHIP 5.6K 0.5% 1/10W |           |           |            |
| 639 |   | G     | RESISTOR |     | R1605   | 1-216-623-11 | METAL CHIP 68 0.5% 1/10W   |           |           |            |
| 640 |   | G     | RESISTOR |     | R1606   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 641 |   | G     | RESISTOR |     | R1607   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 642 |   | G     | RESISTOR |     | R1608   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 643 |   | G     | RESISTOR |     | R1609   | 1-216-041-00 | RES-CHIP 470 5% 1/10W      |           |           |            |
| 644 |   | G     | RESISTOR |     | R1611   | 1-216-678-11 | METAL CHIP 13K 0.5% 1/10W  |           |           |            |
| 645 |   | G     | RESISTOR |     | R1612   | 1-216-057-00 | RES-CHIP 2.2K 5% 1/10W     |           |           |            |

| No. | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption                 | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|----------|-----|---------|--------------|----------------------------|-----------|-----------|------------|
| 646 |   | G     | RESISTOR |     | R1613   | 1-216-625-11 | METAL CHIP 82 0.5% 1/10W   |           |           |            |
| 647 |   | G     | RESISTOR |     | R1614   | 1-216-057-00 | RES-CHIP 2.2K 5% 1/10W     |           |           |            |
| 648 |   | G     | RESISTOR |     | R1615   | 1-249-393-11 | CARBON 10 5% 1/4W          |           |           |            |
| 649 |   | G     | RESISTOR |     | R1616   | 1-249-393-11 | CARBON 10 5% 1/4W          |           |           |            |
| 650 |   | G     | RESISTOR |     | R1617   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 651 |   | G     | RESISTOR |     | R1618   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 652 |   | G     | RESISTOR |     | R1619   | 1-202-965-11 | METAL 0.02 10% 2W          |           |           |            |
| 653 |   | G     | RESISTOR |     | R1620   | 1-216-041-00 | RES-CHIP 470 5% 1/10W      |           |           |            |
| 654 |   | G     | RESISTOR |     | R1621   | 1-247-289-00 | METAL 8.2M 5% 1W           |           |           |            |
| 655 |   | G     | RESISTOR |     | R1622   | 1-208-836-11 | METAL CHIP 180K 0.5% 1/10W |           |           |            |
| 656 |   | G     | RESISTOR |     | R1623   | 1-208-836-11 | METAL CHIP 180K 0.5% 1/10W |           |           |            |
| 657 |   | G     | RESISTOR |     | R1624   | 1-208-836-11 | METAL CHIP 180K 0.5% 1/10W |           |           |            |
| 658 |   | G     | RESISTOR |     | R1701   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 659 |   | G     | RESISTOR |     | R1702   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 660 |   | G     | RESISTOR |     | R1703   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 661 |   | G     | RESISTOR |     | R1704   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 662 |   | G     | RESISTOR |     | R1705   | 1-216-105-91 | RES-CHIP 220K 5% 1/10W     |           |           |            |
| 663 |   | G     | RESISTOR |     | R1707   | 1-205-998-11 | CEMENTED 1 5% 10W          |           |           |            |
| 664 |   | G     | RESISTOR |     | R1708   | 1-205-998-11 | CEMENTED 1 5% 10W          |           |           |            |
| 665 |   | G     | RESISTOR |     | R1709   | 1-208-842-11 | METAL CHIP 330K 0.5% 1/10W |           |           |            |
| 666 |   | G     | RESISTOR |     | R1710   | 1-208-842-11 | METAL CHIP 330K 0.5% 1/10W |           |           |            |
| 667 |   | G     | RESISTOR |     | R1711   | 1-208-848-11 | METAL CHIP 560K 0.5% 1/10W |           |           |            |
| 668 |   | G     | RESISTOR |     | R1712   | 1-208-806-11 | METAL CHIP 10K 0.5% 1/10W  |           |           |            |
| 669 |   | G     | RESISTOR |     | R1713   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 670 |   | G     | RESISTOR |     | R1714   | 1-216-089-91 | RES-CHIP 47K 5% 1/10W      |           |           |            |
| 671 |   | G     | RESISTOR |     | R1715   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 672 |   | G     | RESISTOR |     | R1716   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 673 |   | G     | RESISTOR |     | R1719   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 674 |   | G     | RESISTOR |     | R1720   | 1-245-447-11 | CEMENTED 22 5% 20W         |           |           |            |
| 675 |   | G     | RESISTOR |     | R1721   | 1-216-001-00 | RES-CHIP 10 5% 1/10W       |           |           |            |
| 676 |   | G     | RESISTOR |     | R1722   | 1-218-642-11 | METAL OXIDE 100K 5% 1W     |           |           |            |
| 677 |   | G     | RESISTOR |     | R1723   | 1-218-642-11 | METAL OXIDE 100K 5% 1W     |           |           |            |
| 678 |   | G     | RESISTOR |     | R1801   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 679 |   | G     | RESISTOR |     | R1802   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 680 |   | G     | RESISTOR |     | R1803   | 1-208-829-11 | METAL CHIP 91K 0.5% 1/10W  |           |           |            |
| 681 |   | G     | RESISTOR |     | R1804   | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W |           |           |            |
| 682 |   | G     | RESISTOR |     | R1805   | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W |           |           |            |
| 683 |   | G     | RESISTOR |     | R1806   | 1-208-806-11 | METAL CHIP 10K 0.5% 1/10W  |           |           |            |
| 684 |   | G     | RESISTOR |     | R1807   | 1-216-065-91 | RES-CHIP 4.7K 5% 1/10W     |           |           |            |
| 685 |   | G     | RESISTOR |     | R1808   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 686 |   | G     | RESISTOR |     | R1809   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 687 |   | G     | RESISTOR |     | R1810   | 1-216-675-91 | METAL CHIP 10K 0.5% 1/10W  |           |           |            |
| 688 |   | G     | RESISTOR |     | R1811   | 1-216-675-91 | METAL CHIP 10K 0.5% 1/10W  |           |           |            |



| No. | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption                 | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|----------|-----|---------|--------------|----------------------------|-----------|-----------|------------|
| 689 |   | G     | RESISTOR |     | R1812   | 1-216-089-91 | RES-CHIP 47K 5% 1/10W      |           |           |            |
| 690 |   | G     | RESISTOR |     | R1813   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 691 |   | G     | RESISTOR |     | R1814   | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W |           |           |            |
| 692 |   | G     | RESISTOR |     | R1815   | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W |           |           |            |
| 693 |   | G     | RESISTOR |     | R1816   | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W |           |           |            |
| 694 |   | G     | RESISTOR |     | R1817   | 1-208-830-11 | METAL CHIP 100K 0.5% 1/10W |           |           |            |
| 695 |   | G     | RESISTOR |     | R1818   | 1-208-832-11 | METAL CHIP 120K 0.5% 1/10W |           |           |            |
| 696 |   | G     | RESISTOR |     | R1819   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 697 |   | G     | RESISTOR |     | R1820   | 1-208-834-11 | METAL CHIP 150K 0.5% 1/10W |           |           |            |
| 698 |   | G     | RESISTOR |     | R1821   | 1-208-806-11 | METAL CHIP 10K 0.5% 1/10W  |           |           |            |
| 699 |   | G     | RESISTOR |     | R1822   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 700 |   | G     | RESISTOR |     | R1823   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 701 |   | G     | RESISTOR |     | R1824   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 702 |   | G     | RESISTOR |     | R1825   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 703 |   | G     | RESISTOR |     | R1826   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 704 |   | G     | RESISTOR |     | R1827   | 1-208-827-11 | METAL CHIP 75K 0.5% 1/10W  |           |           |            |
| 705 |   | G     | RESISTOR |     | R1828   | 1-208-827-11 | METAL CHIP 75K 0.5% 1/10W  |           |           |            |
| 706 |   | G     | RESISTOR |     | R1829   | 1-208-806-11 | METAL CHIP 10K 0.5% 1/10W  |           |           |            |
| 707 |   | G     | RESISTOR |     | R1830   | 1-216-065-91 | RES-CHIP 4.7K 5% 1/10W     |           |           |            |
| 708 |   | G     | RESISTOR |     | R1831   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 709 |   | G     | RESISTOR |     | R1832   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 710 |   | G     | RESISTOR |     | R1833   | 1-216-675-91 | METAL CHIP 10K 0.5% 1/10W  |           |           |            |
| 711 |   | G     | RESISTOR |     | R1834   | 1-216-675-91 | METAL CHIP 10K 0.5% 1/10W  |           |           |            |
| 712 |   | G     | RESISTOR |     | R1835   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 713 |   | G     | RESISTOR |     | R1836   | 1-216-065-91 | RES-CHIP 4.7K 5% 1/10W     |           |           |            |
| 714 |   | G     | RESISTOR |     | R1837   | 1-216-675-91 | METAL CHIP 10K 0.5% 1/10W  |           |           |            |
| 715 |   | G     | RESISTOR |     | R1838   | 1-216-679-11 | METAL CHIP 15K 0.5% 1/10W  |           |           |            |
| 716 |   | G     | RESISTOR |     | R1840   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 717 |   | G     | RESISTOR |     | R1841   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 718 |   | G     | RESISTOR |     | R1842   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 719 |   | G     | RESISTOR |     | R1843   | 1-218-768-11 | METAL CHIP 470K 0.5% 1/10W |           |           |            |
| 720 |   | G     | RESISTOR |     | R1844   | 1-218-768-11 | METAL CHIP 470K 0.5% 1/10W |           |           |            |
| 721 |   | G     | RESISTOR |     | R1845   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 722 |   | G     | RESISTOR |     | R1846   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 723 |   | G     | RESISTOR |     | R1847   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 724 |   | G     | RESISTOR |     | R1848   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 725 |   | G     | RESISTOR |     | R1849   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 726 |   | G     | RESISTOR |     | R1850   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 727 |   | G     | RESISTOR |     | R1851   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 728 |   | G     | RESISTOR |     | R1852   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 729 |   | G     | RESISTOR |     | R1853   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 730 |   | G     | RESISTOR |     | R1854   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |
| 731 |   | G     | RESISTOR |     | R1855   | 1-216-073-91 | RES-CHIP 10K 5% 1/10W      |           |           |            |

| No. | # | Board | Type              | △/* | Ref.No. | Part No.     | Description                    | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|-------------------|-----|---------|--------------|--------------------------------|-----------|-----------|------------|
| 732 |   | G     | RESISTOR          |     | R1856   | 1-216-097-11 | RES-CHIP 100K 5% 1/10W         |           |           |            |
| 733 |   | G     | RESISTOR          |     | R1857   | 1-216-097-11 | RES-CHIP 100K 5% 1/10W         |           |           |            |
| 734 |   | G     | RESISTOR          |     | R1858   | 1-216-682-11 | METAL CHIP 20K 0.5% 1/10W      |           |           |            |
| 735 |   | G     | VARIABLE RESISTOR |     | RV1001  | 1-241-762-11 | RES, ADJ, CARBON 2.2K          |           |           |            |
| 736 |   | G     | VARIABLE RESISTOR |     | RV1501  | 1-241-768-11 | RES, ADJ, CARBON 220K          |           |           |            |
| 737 |   | G     | VARIABLE RESISTOR |     | RV1701  | 1-223-387-21 | RES, ADJ, CARBON 330K          |           |           |            |
| 738 |   | G     | RELAY             |     | RY1001  | 1-755-357-11 | RELAY, AC POWER                |           |           |            |
| 739 |   | G     | TRANSFORMER       |     | T1201   | 1-437-972-11 | DC-DC CONVERTER TRANSFORMER    |           |           |            |
| 740 |   | G     | TRANSFORMER       |     | T1401   | 1-437-973-11 | TRANSFORMER, DC-DC CONVERTER   |           |           |            |
| 741 |   | G     | TRANSFORMER       |     | T1601   | 1-437-974-11 | TRANSFORMER, DC-DC CONVERTER   |           |           |            |
| 742 |   | G     | TRANSFORMER       |     | T1602   | 1-437-974-11 | TRANSFORMER, DC-DC CONVERTER   |           |           |            |
| 743 |   | G     | THERMISTOR        |     | TH1001  | 1-809-789-71 | THERMISTOR, POSITIVE           |           |           |            |
| 744 |   | G     | THERMISTOR        |     | TH1002  | 1-809-789-71 | THERMISTOR, POSITIVE           |           |           |            |
| 745 |   | G     | THERMISTOR        |     | TH1003  | 1-809-789-71 | THERMISTOR, POSITIVE           |           |           |            |
| 746 |   | G     | THERMISTOR        |     | TH1301  | 1-804-045-11 | THERMISTOR                     |           |           |            |
| 747 |   | G     | THERMISTOR        |     | TH1701  | 1-809-789-71 | THERMISTOR, POSITIVE           |           |           |            |
| 748 |   | G     | TEST POINT        |     | TP1001  | 1-535-881-21 | TERMINAL, TP (AUTO INSERTION)  |           |           |            |
| 749 |   | G     | TEST POINT        |     | TP1002  | 1-535-881-21 | TERMINAL, TP (AUTO INSERTION)  |           |           |            |
| 750 |   | G     | TEST POINT        |     | TP1201  | 1-535-881-21 | TERMINAL, TP (AUTO INSERTION)  |           |           |            |
| 751 |   | G     | TEST POINT        |     | TP1301  | 1-535-881-21 | TERMINAL, TP (AUTO INSERTION)  |           |           |            |
| 752 |   | G     | TEST POINT        |     | TP1302  | 1-535-881-21 | TERMINAL, TP (AUTO INSERTION)  |           |           |            |
| 753 |   | G     | TEST POINT        |     | TP1303  | 1-535-881-21 | TERMINAL, TP (AUTO INSERTION)  |           |           |            |
| 754 |   | G     | TEST POINT        |     | TP1401  | 1-535-881-21 | TERMINAL, TP (AUTO INSERTION)  |           |           |            |
| 755 |   | G     | TEST POINT        |     | TP1501  | 1-535-881-21 | TERMINAL, TP (AUTO INSERTION)  |           |           |            |
| 756 |   | G     | TEST POINT        |     | TP1502  | 1-535-881-21 | TERMINAL, TP (AUTO INSERTION)  |           |           |            |
| 757 |   | G     | TEST POINT        |     | TP1701  | 1-535-881-21 | TERMINAL, TP (AUTO INSERTION)  |           |           |            |
| 758 |   | P     | CAPACITOR         |     | C3101   | 1-128-993-21 | ELECT CHIP 22UF 20% 10V        |           |           |            |
| 759 |   | P     | CAPACITOR         |     | C3102   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V  |           |           |            |
| 760 |   | P     | CAPACITOR         |     | C3103   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V  |           |           |            |
| 761 |   | P     | CAPACITOR         |     | C3105   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V  |           |           |            |
| 762 |   | P     | CAPACITOR         |     | C3107   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V  |           |           |            |
| 763 |   | P     | CAPACITOR         |     | C3108   | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V    |           |           |            |
| 764 |   | P     | CAPACITOR         |     | C3109   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 765 |   | P     | CAPACITOR         |     | C3110   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 766 |   | P     | CAPACITOR         |     | C3111   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 767 |   | P     | CAPACITOR         |     | C3112   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 768 |   | P     | CAPACITOR         |     | C3113   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 769 |   | P     | CAPACITOR         |     | C3114   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 770 |   | P     | CAPACITOR         |     | C3115   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 771 |   | P     | CAPACITOR         |     | C3116   | 1-127-760-11 | CERAMIC CHIP 4.7UF 10% 6.3V    |           |           |            |
| 772 |   | P     | CAPACITOR         |     | C3117   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 773 |   | P     | CAPACITOR         |     | C3118   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 774 |   | P     | CAPACITOR         |     | C3119   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |

| No. | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                      | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|-----------|-----|---------|--------------|---------------------------------|-----------|-----------|------------|
| 775 |   | P     | CAPACITOR |     | C3120   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 776 |   | P     | CAPACITOR |     | C3121   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 777 |   | P     | CAPACITOR |     | C3122   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 778 |   | P     | CAPACITOR |     | C3123   | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V     |           |           |            |
| 779 |   | P     | CAPACITOR |     | C3124   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 780 |   | P     | CAPACITOR |     | C3125   | 1-117-863-11 | CERAMIC CHIP 0.47UF 10.00% 6.3V |           |           |            |
| 781 |   | P     | CAPACITOR |     | C3126   | 1-117-863-11 | CERAMIC CHIP 0.47UF 10.00% 6.3V |           |           |            |
| 782 |   | P     | CAPACITOR |     | C3201   | 1-128-993-21 | ELECT CHIP 22UF 20% 10V         |           |           |            |
| 783 |   | P     | CAPACITOR |     | C3202   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 784 |   | P     | CAPACITOR |     | C3203   | 1-128-993-21 | ELECT CHIP 22UF 20% 10V         |           |           |            |
| 785 |   | P     | CAPACITOR |     | C3205   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V       |           |           |            |
| 786 |   | P     | CAPACITOR |     | C3206   | 1-164-227-11 | CERAMIC CHIP 0.022UF 10.00% 25V |           |           |            |
| 787 |   | P     | CAPACITOR |     | C3207   | 1-162-910-11 | CERAMIC CHIP 5PF 0.25PF 50V     |           |           |            |
| 788 |   | P     | CAPACITOR |     | C3208   | 1-162-915-11 | CERAMIC CHIP 10PF 0.50PF 50V    |           |           |            |
| 789 |   | P     | CAPACITOR |     | C3209   | 1-162-915-11 | CERAMIC CHIP 10PF 0.50PF 50V    |           |           |            |
| 790 |   | P     | CAPACITOR |     | C3210   | 1-162-910-11 | CERAMIC CHIP 5PF 0.25PF 50V     |           |           |            |
| 791 |   | P     | CAPACITOR |     | C3211   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 792 |   | P     | CAPACITOR |     | C3212   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V       |           |           |            |
| 793 |   | P     | CAPACITOR |     | C3213   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 794 |   | P     | CAPACITOR |     | C3214   | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V     |           |           |            |
| 795 |   | P     | CAPACITOR |     | C3215   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 796 |   | P     | CAPACITOR |     | C3216   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 797 |   | P     | CAPACITOR |     | C3217   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 798 |   | P     | CAPACITOR |     | C3218   | 1-128-993-21 | ELECT CHIP 22UF 20% 10V         |           |           |            |
| 799 |   | P     | CAPACITOR |     | C3219   | 1-126-206-11 | ELECT CHIP 100UF 20.00% 6.3V    |           |           |            |
| 800 |   | P     | CAPACITOR |     | C3220   | 1-126-395-11 | ELECT CHIP 22UF 20.00% 16V      |           |           |            |
| 801 |   | P     | CAPACITOR |     | C3221   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 802 |   | P     | CAPACITOR |     | C3222   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 803 |   | P     | CAPACITOR |     | C3223   | 1-125-838-11 | CERAMIC CHIP 2.2UF 10% 6.3V     |           |           |            |
| 804 |   | P     | CAPACITOR |     | C3224   | 1-164-315-11 | CERAMIC CHIP 470PF 5.00% 50V    |           |           |            |
| 805 |   | P     | CAPACITOR |     | C3225   | 1-128-993-21 | ELECT CHIP 22UF 20% 10V         |           |           |            |
| 806 |   | P     | CAPACITOR |     | C3226   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V       |           |           |            |
| 807 |   | P     | CAPACITOR |     | C3227   | 1-164-315-11 | CERAMIC CHIP 470PF 5.00% 50V    |           |           |            |
| 808 |   | P     | CAPACITOR |     | C3228   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 809 |   | P     | CAPACITOR |     | C3229   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 810 |   | P     | CAPACITOR |     | C3230   | 1-107-823-11 | CERAMIC CHIP 0.47UF 10.00% 16V  |           |           |            |
| 811 |   | P     | CAPACITOR |     | C3231   | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V     |           |           |            |
| 812 |   | P     | CAPACITOR |     | C3232   | 1-107-823-11 | CERAMIC CHIP 0.47UF 10.00% 16V  |           |           |            |
| 813 |   | P     | CAPACITOR |     | C3233   | 1-126-395-11 | ELECT CHIP 22UF 20.00% 16V      |           |           |            |
| 814 |   | P     | CAPACITOR |     | C3234   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V       |           |           |            |
| 815 |   | P     | CAPACITOR |     | C3235   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V       |           |           |            |
| 816 |   | P     | CAPACITOR |     | C3238   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 817 |   | P     | CAPACITOR |     | C3239   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V       |           |           |            |

| No. | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                      | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|-----------|-----|---------|--------------|---------------------------------|-----------|-----------|------------|
| 818 |   | P     | CAPACITOR |     | C3240   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 819 |   | P     | CAPACITOR |     | C3302   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 820 |   | P     | CAPACITOR |     | C3303   | 1-128-993-21 | ELECT CHIP 22UF 20% 10V         |           |           |            |
| 821 |   | P     | CAPACITOR |     | C3304   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 822 |   | P     | CAPACITOR |     | C3305   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 823 |   | P     | CAPACITOR |     | C3306   | 1-128-993-21 | ELECT CHIP 22UF 20% 10V         |           |           |            |
| 824 |   | P     | CAPACITOR |     | C3307   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 825 |   | P     | CAPACITOR |     | C3308   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 826 |   | P     | CAPACITOR |     | C3309   | 1-128-993-21 | ELECT CHIP 22UF 20% 10V         |           |           |            |
| 827 |   | P     | CAPACITOR |     | C3310   | 1-117-863-11 | CERAMIC CHIP 0.47UF 10.00% 6.3V |           |           |            |
| 828 |   | P     | CAPACITOR |     | C3311   | 1-126-246-11 | ELECT CHIP 220UF 20.00% 4V      |           |           |            |
| 829 |   | P     | CAPACITOR |     | C3313   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 830 |   | P     | CAPACITOR |     | C3401   | 1-162-916-11 | CERAMIC CHIP 12PF 5.00% 50V     |           |           |            |
| 831 |   | P     | CAPACITOR |     | C3402   | 1-162-908-11 | CERAMIC CHIP 3PF 0.25PF 50V     |           |           |            |
| 832 |   | P     | CAPACITOR |     | C3403   | 1-126-206-11 | ELECT CHIP 100UF 20.00% 6.3V    |           |           |            |
| 833 |   | P     | CAPACITOR |     | C3404   | 1-126-246-11 | ELECT CHIP 220UF 20.00% 4V      |           |           |            |
| 834 |   | P     | CAPACITOR |     | C3405   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 835 |   | P     | CAPACITOR |     | C3406   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 836 |   | P     | CAPACITOR |     | C3407   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 837 |   | P     | CAPACITOR |     | C3408   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 838 |   | P     | CAPACITOR |     | C3409   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 839 |   | P     | CAPACITOR |     | C3410   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 840 |   | P     | CAPACITOR |     | C3411   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 841 |   | P     | CAPACITOR |     | C3412   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 842 |   | P     | CAPACITOR |     | C3413   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 843 |   | P     | CAPACITOR |     | C3414   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 844 |   | P     | CAPACITOR |     | C3415   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 845 |   | P     | CAPACITOR |     | C3416   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 846 |   | P     | CAPACITOR |     | C3417   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 847 |   | P     | CAPACITOR |     | C3418   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 848 |   | P     | CAPACITOR |     | C3419   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 849 |   | P     | CAPACITOR |     | C3420   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 850 |   | P     | CAPACITOR |     | C3421   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 851 |   | P     | CAPACITOR |     | C3422   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 852 |   | P     | CAPACITOR |     | C3423   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 853 |   | P     | CAPACITOR |     | C3424   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 854 |   | P     | CAPACITOR |     | C3425   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 855 |   | P     | CAPACITOR |     | C3426   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 856 |   | P     | CAPACITOR |     | C3427   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 857 |   | P     | CAPACITOR |     | C3428   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 858 |   | P     | CAPACITOR |     | C3429   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 859 |   | P     | CAPACITOR |     | C3430   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 860 |   | P     | CAPACITOR |     | C3431   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |

| No. | # | Board | Type      | △ /* | Ref.No. | Part No.     | Description                     | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|-----------|------|---------|--------------|---------------------------------|-----------|-----------|------------|
| 861 |   | P     | CAPACITOR |      | C3432   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 862 |   | P     | CAPACITOR |      | C3433   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 863 |   | P     | CAPACITOR |      | C3434   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 864 |   | P     | CAPACITOR |      | C3435   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 865 |   | P     | CAPACITOR |      | C3451   | 1-128-993-21 | ELECT CHIP 22UF 20% 10V         |           |           |            |
| 866 |   | P     | CAPACITOR |      | C3452   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 867 |   | P     | CAPACITOR |      | C3453   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 868 |   | P     | CAPACITOR |      | C3454   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 869 |   | P     | CAPACITOR |      | C3501   | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V     |           |           |            |
| 870 |   | P     | CAPACITOR |      | C3502   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 871 |   | P     | CAPACITOR |      | C3503   | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |
| 872 |   | P     | CAPACITOR |      | C3504   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 873 |   | P     | CAPACITOR |      | C3505   | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |
| 874 |   | P     | CAPACITOR |      | C3506   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 875 |   | P     | CAPACITOR |      | C3507   | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |
| 876 |   | P     | CAPACITOR |      | C3508   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 877 |   | P     | CAPACITOR |      | C3509   | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V     |           |           |            |
| 878 |   | P     | CAPACITOR |      | C3510   | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |
| 879 |   | P     | CAPACITOR |      | C3511   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 880 |   | P     | CAPACITOR |      | C3512   | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |
| 881 |   | P     | CAPACITOR |      | C3513   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 882 |   | P     | CAPACITOR |      | C3514   | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |
| 883 |   | P     | CAPACITOR |      | C3515   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 884 |   | P     | CONNECTOR |      | CN3101  | 1-817-120-11 | CONNECTOR, DVI-D                |           |           |            |
| 885 |   | P     | CONNECTOR |      | CN3102  | 1-817-112-11 | HALF PITCH CONNECTOR (26PIN)    |           |           |            |
| 886 |   | P     | CONNECTOR | *    | CN3201  | 1-779-268-21 | PIN, CONNECTOR (1.5MM)(SMD)11P  |           |           |            |
| 887 |   | P     | CONNECTOR |      | CN3202  | 1-766-382-21 | PIN, CONNECTOR (1.5MM)(SMD)10P  |           |           |            |
| 888 |   | P     | CONNECTOR |      | CN3204  | 1-815-954-21 | PIN, CONNECTOR (PC BOARD) 13P   |           |           |            |
| 889 |   | P     | CONNECTOR |      | CN3205  | 1-573-290-21 | PIN, CONNECTOR (1.5MM) (SMD)4P  |           |           |            |
| 890 |   | P     | CONNECTOR |      | CN3207  | 1-766-383-11 | PIN, CONNECTOR (1.5MM)(SMD)12P  |           |           |            |
| 891 |   | P     | CONNECTOR | *    | CN3209  | 1-573-768-21 | PIN, CONNECTOR (1.5MM) (SMD)5P  |           |           |            |
| 892 |   | P     | CONNECTOR |      | CN3501  | 1-817-110-21 | BOARD TO WIRE CONNECTOR 31P     |           |           |            |
| 893 |   | P     | DIODE     |      | D3101   | 8-719-069-55 | DIODE UDZSTE-175.6B             |           |           |            |
| 894 |   | P     | DIODE     |      | D3103   | 8-719-069-55 | DIODE UDZSTE-175.6B             |           |           |            |
| 895 |   | P     | DIODE     |      | D3104   | 8-719-024-77 | DIODE HN1D03FU-TE85L            |           |           |            |
| 896 |   | P     | DIODE     |      | D3105   | 8-719-024-77 | DIODE HN1D03FU-TE85L            |           |           |            |
| 897 |   | P     | DIODE     |      | D3106   | 8-719-024-77 | DIODE HN1D03FU-TE85L            |           |           |            |
| 898 |   | P     | DIODE     |      | D3107   | 8-719-024-77 | DIODE HN1D03FU-TE85L            |           |           |            |
| 899 |   | P     | DIODE     |      | D3108   | 8-719-083-58 | DIODE UDZSTE-173.9B             |           |           |            |
| 900 |   | P     | DIODE     |      | D3110   | 8-719-069-55 | DIODE UDZSTE-175.6B             |           |           |            |
| 901 |   | P     | DIODE     |      | D3111   | 8-719-024-77 | DIODE HN1D03FU-TE85L            |           |           |            |
| 902 |   | P     | DIODE     |      | D3112   | 8-719-024-77 | DIODE HN1D03FU-TE85L            |           |           |            |
| 903 |   | P     | DIODE     |      | D3113   | 8-719-024-77 | DIODE HN1D03FU-TE85L            |           |           |            |

| No. | # | Board | Type    | △/* | Ref.No. | Part No.     | Descrption             | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|---------|-----|---------|--------------|------------------------|-----------|-----------|------------|
| 904 |   | P     | DIODE   |     | D3114   | 8-719-024-77 | DIODE HN1D03FU-TE85L   |           |           |            |
| 905 |   | P     | DIODE   |     | D3201   | 8-719-081-19 | DIODE 1SS383(T5RSONY1) |           |           |            |
| 906 |   | P     | DIODE   |     | D3202   | 8-719-081-19 | DIODE 1SS383(T5RSONY1) |           |           |            |
| 907 |   | P     | DIODE   |     | D3203   | 8-719-404-50 | DIODE MA111-TX         |           |           |            |
| 908 |   | P     | DIODE   |     | D3204   | 8-719-404-50 | DIODE MA111-TX         |           |           |            |
| 909 |   | P     | DIODE   |     | D3205   | 8-719-404-50 | DIODE MA111-TX         |           |           |            |
| 910 |   | P     | DIODE   |     | D3206   | 8-719-069-55 | DIODE UDZSTE-175.6B    |           |           |            |
| 911 |   | P     | DIODE   |     | D3207   | 8-719-404-50 | DIODE MA111-TX         |           |           |            |
| 912 |   | P     | DIODE   |     | D3209   | 8-719-069-55 | DIODE UDZSTE-175.6B    |           |           |            |
| 913 |   | P     | DIODE   |     | D3210   | 8-719-069-55 | DIODE UDZSTE-175.6B    |           |           |            |
| 914 |   | P     | DIODE   |     | D3211   | 8-719-404-50 | DIODE MA111-TX         |           |           |            |
| 915 |   | P     | DIODE   |     | D3301   | 8-719-404-50 | DIODE MA111-TX         |           |           |            |
| 916 |   | P     | FERRITE |     | FB3101  | 1-414-445-11 | FERRITE 0UH            |           |           |            |
| 917 |   | P     | FERRITE |     | FB3102  | 1-414-445-11 | FERRITE 0UH            |           |           |            |
| 918 |   | P     | FERRITE |     | FB3103  | 1-414-445-11 | FERRITE 0UH            |           |           |            |
| 919 |   | P     | FERRITE |     | FB3104  | 1-414-445-11 | FERRITE 0UH            |           |           |            |
| 920 |   | P     | FERRITE |     | FB3105  | 1-414-445-11 | FERRITE 0UH            |           |           |            |
| 921 |   | P     | FERRITE |     | FB3201  | 1-414-445-11 | FERRITE 0UH            |           |           |            |
| 922 |   | P     | FERRITE |     | FB3202  | 1-414-864-11 | FERRITE 0UH            |           |           |            |
| 923 |   | P     | FERRITE |     | FB3203  | 1-414-864-11 | FERRITE 0UH            |           |           |            |
| 924 |   | P     | FERRITE |     | FB3205  | 1-414-864-11 | FERRITE 0UH            |           |           |            |
| 925 |   | P     | FERRITE |     | FB3206  | 1-414-864-11 | FERRITE 0UH            |           |           |            |
| 926 |   | P     | FERRITE |     | FB3208  | 1-414-445-11 | FERRITE 0UH            |           |           |            |
| 927 |   | P     | FERRITE |     | FB3209  | 1-414-445-11 | FERRITE 0UH            |           |           |            |
| 928 |   | P     | FERRITE |     | FB3210  | 1-414-445-11 | FERRITE 0UH            |           |           |            |
| 929 |   | P     | FERRITE |     | FB3211  | 1-414-864-11 | FERRITE 0UH            |           |           |            |
| 930 |   | P     | FERRITE |     | FB3212  | 1-414-445-11 | FERRITE 0UH            |           |           |            |
| 931 |   | P     | FERRITE |     | FB3213  | 1-414-864-11 | FERRITE 0UH            |           |           |            |
| 932 |   | P     | FERRITE |     | FB3303  | 1-414-445-11 | FERRITE 0UH            |           |           |            |
| 933 |   | P     | FERRITE |     | FB3304  | 1-414-864-11 | FERRITE 0UH            |           |           |            |
| 934 |   | P     | FERRITE |     | FB3305  | 1-414-864-11 | FERRITE 0UH            |           |           |            |
| 935 |   | P     | FERRITE |     | FB3451  | 1-414-445-11 | FERRITE 0UH            |           |           |            |
| 936 |   | P     | FERRITE |     | FB3501  | 1-414-445-11 | FERRITE 0UH            |           |           |            |
| 937 |   | P     | FERRITE |     | FB3502  | 1-414-445-11 | FERRITE 0UH            |           |           |            |
| 938 |   | P     | FERRITE |     | FB3503  | 1-414-445-11 | FERRITE 0UH            |           |           |            |
| 939 |   | P     | IC      |     | IC3101  | 8-759-675-46 | IC SN65LVDS1050PWR     |           |           |            |
| 940 |   | P     | IC      |     | IC3102  | 8-759-683-99 | IC BA8274F-E2          |           |           |            |
| 941 |   | P     | IC      |     | IC3105  | 8-759-596-39 | IC SN74LV4052APWR      |           |           |            |
| 942 |   | P     | IC      |     | IC3106  | 6-700-150-01 | IC M24C04-WMN6T(A)     |           |           |            |
| 943 |   | P     | IC      |     | IC3107  | 6-703-097-01 | IC TFP501PZP           |           |           |            |
| 944 |   | P     | IC      |     | IC3108  | 8-759-338-95 | IC NJM2903V(Te2)       |           |           |            |
| 945 |   | P     | IC      |     | IC3109  | 8-759-596-29 | IC SN74LV4066APWR      |           |           |            |
| 946 |   | P     | IC      |     | IC3201  | 8-759-082-58 | IC TC7W08FU            |           |           |            |

| No. | # | Board | Type       | △ / * | Ref.No. | Part No.     | Descrption                  | Remarks-1 | Remarks-2 | Difference |
|-----|---|-------|------------|-------|---------|--------------|-----------------------------|-----------|-----------|------------|
| 947 |   | P     | IC         |       | IC3202  | 8-759-824-69 | IC PST9245NL                |           |           |            |
| 948 |   | P     | IC         |       | IC3203  | 6-703-095-01 | IC HD64F2134AFA20V          |           |           |            |
| 949 |   | P     | IC         |       | IC3204  | 6-702-688-01 | IC M24C64-WMN6T(B)          |           |           |            |
| 950 |   | P     | IC         |       | IC3205  | 8-759-585-53 | IC SN74AHCT245PWR           |           |           |            |
| 951 |   | P     | IC         |       | IC3206  | 8-759-549-15 | IC SN74LV245APWR            |           |           |            |
| 952 |   | P     | IC         |       | IC3207  | 8-759-579-31 | IC PQ20WZ1U                 |           |           |            |
| 953 |   | P     | IC         |       | IC3208  | 8-759-082-60 | IC TC7S66FU                 |           |           |            |
| 954 |   | P     | IC         |       | IC3209  | 6-701-977-01 | IC MM1565AFBE               |           |           |            |
| 955 |   | P     | IC         |       | IC3210  | 8-759-581-11 | IC NJM2125F(TE2)            |           |           |            |
| 956 |   | P     | IC         |       | IC3301  | 8-759-669-75 | IC TLC2932IPWR              |           |           |            |
| 957 |   | P     | IC         |       | IC3302  | 6-700-439-01 | IC SN74ALVC00PWR            |           |           |            |
| 958 |   | P     | IC         |       | IC3303  | 6-700-394-01 | IC BA25BC0FP-E2             |           |           |            |
| 959 |   | P     | IC         |       | IC3401  | 6-703-096-01 | IC CXD9738R                 |           |           |            |
| 960 |   | P     | IC         |       | IC3451  | 6-802-480-01 | IC XC9572XL-10VQ44C-ORBIT   |           |           |            |
| 961 |   | P     | IC         |       | IC3501  | 6-700-592-01 | IC DS90C387VJDX             |           |           |            |
| 962 |   | P     | IC         |       | IC3502  | 6-701-762-11 | IC DS90LV018ATMX            |           |           |            |
| 963 |   | P     | COIL       |       | L3201   | 1-469-553-21 | INDUCTOR 4.7UH              |           |           |            |
| 964 |   | P     | COIL       |       | L3202   | 1-419-630-21 | INDUCTOR 4.7UH              |           |           |            |
| 965 |   | P     | COIL       |       | L3301   | 1-469-561-21 | INDUCTOR 100UH              |           |           |            |
| 966 |   | P     | COIL       |       | L3302   | 1-469-561-21 | INDUCTOR 100UH              |           |           |            |
| 967 |   | P     | TRANSISTOR |       | Q3101   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX     |           |           |            |
| 968 |   | P     | TRANSISTOR |       | Q3102   | 8-729-029-14 | TRANSISTOR DTC144EUA-T106   |           |           |            |
| 969 |   | P     | TRANSISTOR |       | Q3103   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 970 |   | P     | TRANSISTOR |       | Q3104   | 6-550-014-01 | TRANSISTOR SSM6N15FU(TE85R) |           |           |            |
| 971 |   | P     | TRANSISTOR |       | Q3105   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 972 |   | P     | TRANSISTOR |       | Q3106   | 8-729-028-86 | TRANSISTOR DTA143EUA-T106   |           |           |            |
| 973 |   | P     | TRANSISTOR |       | Q3107   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 974 |   | P     | TRANSISTOR |       | Q3108   | 8-729-046-75 | TRANSISTOR SI2301DS-T1      |           |           |            |
| 975 |   | P     | TRANSISTOR |       | Q3109   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 976 |   | P     | TRANSISTOR |       | Q3201   | 6-550-014-01 | TRANSISTOR SSM6N15FU(TE85R) |           |           |            |
| 977 |   | P     | TRANSISTOR |       | Q3203   | 6-550-014-01 | TRANSISTOR SSM6N15FU(TE85R) |           |           |            |
| 978 |   | P     | TRANSISTOR |       | Q3204   | 8-729-028-86 | TRANSISTOR DTA143EUA-T106   |           |           |            |
| 979 |   | P     | TRANSISTOR |       | Q3205   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 980 |   | P     | TRANSISTOR |       | Q3206   | 8-729-028-86 | TRANSISTOR DTA143EUA-T106   |           |           |            |
| 981 |   | P     | TRANSISTOR |       | Q3207   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 982 |   | P     | TRANSISTOR |       | Q3301   | 8-729-046-75 | TRANSISTOR SI2301DS-T1      |           |           |            |
| 983 |   | P     | TRANSISTOR |       | Q3302   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 984 |   | P     | RESISTOR   |       | R3101   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W     |           |           |            |
| 985 |   | P     | RESISTOR   |       | R3102   | 1-216-813-11 | METAL CHIP 220 5% 1/10W     |           |           |            |
| 986 |   | P     | RESISTOR   |       | R3103   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W     |           |           |            |
| 987 |   | P     | RESISTOR   |       | R3104   | 1-218-823-11 | METAL CHIP 100 0.5% 1/10W   |           |           |            |
| 988 |   | P     | RESISTOR   |       | R3105   | 1-218-823-11 | METAL CHIP 100 0.5% 1/10W   |           |           |            |
| 989 |   | P     | RESISTOR   |       | R3107   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W     |           |           |            |

| No.  | # | Board | Type     | △/* | Ref.No. | Part No.     | Description |      |    |       | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|-----|---------|--------------|-------------|------|----|-------|-----------|-----------|------------|
| 990  |   | P     | RESISTOR |     | R3108   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 991  |   | P     | RESISTOR |     | R3110   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 992  |   | P     | RESISTOR |     | R3113   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 993  |   | P     | RESISTOR |     | R3115   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 994  |   | P     | RESISTOR |     | R3116   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 995  |   | P     | RESISTOR |     | R3118   | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W |           |           |            |
| 996  |   | P     | RESISTOR |     | R3120   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 997  |   | P     | RESISTOR |     | R3121   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 998  |   | P     | RESISTOR |     | R3122   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 999  |   | P     | RESISTOR |     | R3123   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 1000 |   | P     | RESISTOR |     | R3124   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 1001 |   | P     | RESISTOR |     | R3125   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 1002 |   | P     | RESISTOR |     | R3126   | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W |           |           |            |
| 1003 |   | P     | RESISTOR |     | R3127   | 1-216-829-11 | METAL CHIP  | 4.7K | 5% | 1/10W |           |           |            |
| 1004 |   | P     | RESISTOR |     | R3128   | 1-216-829-11 | METAL CHIP  | 4.7K | 5% | 1/10W |           |           |            |
| 1005 |   | P     | RESISTOR |     | R3129   | 1-216-829-11 | METAL CHIP  | 4.7K | 5% | 1/10W |           |           |            |
| 1006 |   | P     | RESISTOR |     | R3130   | 1-216-829-11 | METAL CHIP  | 4.7K | 5% | 1/10W |           |           |            |
| 1007 |   | P     | RESISTOR |     | R3133   | 1-216-829-11 | METAL CHIP  | 4.7K | 5% | 1/10W |           |           |            |
| 1008 |   | P     | RESISTOR |     | R3134   | 1-216-841-11 | METAL CHIP  | 47K  | 5% | 1/10W |           |           |            |
| 1009 |   | P     | RESISTOR |     | R3135   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 1010 |   | P     | RESISTOR |     | R3137   | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W |           |           |            |
| 1011 |   | P     | RESISTOR |     | R3138   | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W |           |           |            |
| 1012 |   | P     | RESISTOR |     | R3139   | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W |           |           |            |
| 1013 |   | P     | RESISTOR |     | R3141   | 1-216-841-11 | METAL CHIP  | 47K  | 5% | 1/10W |           |           |            |
| 1014 |   | P     | RESISTOR |     | R3142   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 1015 |   | P     | RESISTOR |     | R3143   | 1-216-829-11 | METAL CHIP  | 4.7K | 5% | 1/10W |           |           |            |
| 1016 |   | P     | RESISTOR |     | R3144   | 1-216-829-11 | METAL CHIP  | 4.7K | 5% | 1/10W |           |           |            |
| 1017 |   | P     | RESISTOR |     | R3145   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 1018 |   | P     | RESISTOR |     | R3146   | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W |           |           |            |
| 1019 |   | P     | RESISTOR |     | R3147   | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W |           |           |            |
| 1020 |   | P     | RESISTOR |     | R3148   | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W |           |           |            |
| 1021 |   | P     | RESISTOR |     | R3149   | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W |           |           |            |
| 1022 |   | P     | RESISTOR |     | R3151   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 1023 |   | P     | RESISTOR |     | R3152   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 1024 |   | P     | RESISTOR |     | R3153   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 1025 |   | P     | RESISTOR |     | R3154   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 1026 |   | P     | RESISTOR |     | R3159   | 1-216-829-11 | METAL CHIP  | 4.7K | 5% | 1/10W |           |           |            |
| 1027 |   | P     | RESISTOR |     | R3161   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 1028 |   | P     | RESISTOR |     | R3201   | 1-216-829-11 | METAL CHIP  | 4.7K | 5% | 1/10W |           |           |            |
| 1029 |   | P     | RESISTOR |     | R3202   | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W |           |           |            |
| 1030 |   | P     | RESISTOR |     | R3203   | 1-216-829-11 | METAL CHIP  | 4.7K | 5% | 1/10W |           |           |            |
| 1031 |   | P     | RESISTOR |     | R3204   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 1032 |   | P     | RESISTOR |     | R3206   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |



| No.  | # | Board | Type     | △ /* | Ref.No. | Part No.     | Descrption                 | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|------|---------|--------------|----------------------------|-----------|-----------|------------|
| 1033 |   | P     | RESISTOR |      | R3207   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 1034 |   | P     | RESISTOR |      | R3208   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 1035 |   | P     | RESISTOR |      | R3209   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 1036 |   | P     | RESISTOR |      | R3210   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 1037 |   | P     | RESISTOR |      | R3212   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 1038 |   | P     | RESISTOR |      | R3213   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 1039 |   | P     | RESISTOR |      | R3214   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W   |           |           |            |
| 1040 |   | P     | RESISTOR |      | R3215   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 1041 |   | P     | RESISTOR |      | R3216   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W   |           |           |            |
| 1042 |   | P     | RESISTOR |      | R3217   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 1043 |   | P     | RESISTOR |      | R3218   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 1044 |   | P     | RESISTOR |      | R3219   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W   |           |           |            |
| 1045 |   | P     | RESISTOR |      | R3221   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 1046 |   | P     | RESISTOR |      | R3222   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 1047 |   | P     | RESISTOR |      | R3223   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 1048 |   | P     | RESISTOR |      | R3224   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 1049 |   | P     | RESISTOR |      | R3225   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 1050 |   | P     | RESISTOR |      | R3226   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 1051 |   | P     | RESISTOR |      | R3227   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 1052 |   | P     | RESISTOR |      | R3228   | 1-218-866-11 | METAL CHIP 6.2K 0.5% 1/10W |           |           |            |
| 1053 |   | P     | RESISTOR |      | R3229   | 1-218-853-11 | METAL CHIP 1.8K 0.5% 1/10W |           |           |            |
| 1054 |   | P     | RESISTOR |      | R3230   | 1-216-835-11 | METAL CHIP 15K 5% 1/10W    |           |           |            |
| 1055 |   | P     | RESISTOR |      | R3231   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 1056 |   | P     | RESISTOR |      | R3232   | 1-216-832-11 | METAL CHIP 8.2K 5% 1/10W   |           |           |            |
| 1057 |   | P     | RESISTOR |      | R3233   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W   |           |           |            |
| 1058 |   | P     | RESISTOR |      | R3234   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W   |           |           |            |
| 1059 |   | P     | RESISTOR |      | R3235   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 1060 |   | P     | RESISTOR |      | R3236   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 1061 |   | P     | RESISTOR |      | R3238   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W   |           |           |            |
| 1062 |   | P     | RESISTOR |      | R3241   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 1063 |   | P     | RESISTOR |      | R3242   | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W  |           |           |            |
| 1064 |   | P     | RESISTOR |      | R3243   | 1-218-863-11 | METAL CHIP 4.7K 0.5% 1/10W |           |           |            |
| 1065 |   | P     | RESISTOR |      | R3244   | 1-218-855-11 | METAL CHIP 2.2K 0.5% 1/10W |           |           |            |
| 1066 |   | P     | RESISTOR |      | R3245   | 1-218-847-11 | METAL CHIP 1K 0.5% 1/10W   |           |           |            |
| 1067 |   | P     | RESISTOR |      | R3246   | 1-218-847-11 | METAL CHIP 1K 0.5% 1/10W   |           |           |            |
| 1068 |   | P     | RESISTOR |      | R3247   | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W  |           |           |            |
| 1069 |   | P     | RESISTOR |      | R3248   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 1070 |   | P     | RESISTOR |      | R3249   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W    |           |           |            |
| 1071 |   | P     | RESISTOR |      | R3252   | 1-216-835-11 | METAL CHIP 15K 5% 1/10W    |           |           |            |
| 1072 |   | P     | RESISTOR |      | R3253   | 1-216-835-11 | METAL CHIP 15K 5% 1/10W    |           |           |            |
| 1073 |   | P     | RESISTOR |      | R3256   | 1-216-801-11 | METAL CHIP 22 5% 1/10W     |           |           |            |
| 1074 |   | P     | RESISTOR |      | R3258   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 1075 |   | P     | RESISTOR |      | R3259   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W   |           |           |            |

| No.  | # | Board | Type     | △ /* | Ref.No. | Part No.     | Descrption                | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|------|---------|--------------|---------------------------|-----------|-----------|------------|
| 1076 |   | P     | RESISTOR |      | R3262   | 1-216-809-11 | METAL CHIP 100 5% 1/10W   |           |           |            |
| 1077 |   | P     | RESISTOR |      | R3263   | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W |           |           |            |
| 1078 |   | P     | RESISTOR |      | R3264   | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W |           |           |            |
| 1079 |   | P     | RESISTOR |      | R3265   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 1080 |   | P     | RESISTOR |      | R3266   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 1081 |   | P     | RESISTOR |      | R3267   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 1082 |   | P     | RESISTOR |      | R3268   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 1083 |   | P     | RESISTOR |      | R3269   | 1-216-809-11 | METAL CHIP 100 5% 1/10W   |           |           |            |
| 1084 |   | P     | RESISTOR |      | R3270   | 1-216-809-11 | METAL CHIP 100 5% 1/10W   |           |           |            |
| 1085 |   | P     | RESISTOR |      | R3272   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 1086 |   | P     | RESISTOR |      | R3273   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 1087 |   | P     | RESISTOR |      | R3274   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 1088 |   | P     | RESISTOR |      | R3276   | 1-216-864-11 | SHORT CHIP 0              |           |           |            |
| 1089 |   | P     | RESISTOR |      | R3277   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 1090 |   | P     | RESISTOR |      | R3301   | 1-218-847-11 | METAL CHIP 1K 0.5% 1/10W  |           |           |            |
| 1091 |   | P     | RESISTOR |      | R3302   | 1-218-858-11 | METAL CHIP 3K 0.5% 1/10W  |           |           |            |
| 1092 |   | P     | RESISTOR |      | R3303   | 1-218-885-11 | METAL CHIP 39K 0.5% 1/10W |           |           |            |
| 1093 |   | P     | RESISTOR |      | R3306   | 1-216-864-11 | SHORT CHIP 0              |           |           |            |
| 1094 |   | P     | RESISTOR |      | R3307   | 1-216-864-11 | SHORT CHIP 0              |           |           |            |
| 1095 |   | P     | RESISTOR |      | R3309   | 1-216-864-11 | SHORT CHIP 0              |           |           |            |
| 1096 |   | P     | RESISTOR |      | R3310   | 1-216-864-11 | SHORT CHIP 0              |           |           |            |
| 1097 |   | P     | RESISTOR |      | R3314   | 1-216-805-11 | METAL CHIP 47 5% 1/10W    |           |           |            |
| 1098 |   | P     | RESISTOR |      | R3317   | 1-216-801-11 | METAL CHIP 22 5% 1/10W    |           |           |            |
| 1099 |   | P     | RESISTOR |      | R3319   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 1100 |   | P     | RESISTOR |      | R3320   | 1-216-864-11 | SHORT CHIP 0              |           |           |            |
| 1101 |   | P     | RESISTOR |      | R3322   | 1-216-864-11 | SHORT CHIP 0              |           |           |            |
| 1102 |   | P     | RESISTOR |      | R3323   | 1-216-864-11 | SHORT CHIP 0              |           |           |            |
| 1103 |   | P     | RESISTOR |      | R3401   | 1-216-864-11 | SHORT CHIP 0              |           |           |            |
| 1104 |   | P     | RESISTOR |      | R3403   | 1-216-864-11 | SHORT CHIP 0              |           |           |            |
| 1105 |   | P     | RESISTOR |      | R3405   | 1-216-864-11 | SHORT CHIP 0              |           |           |            |
| 1106 |   | P     | RESISTOR |      | R3407   | 1-216-864-11 | SHORT CHIP 0              |           |           |            |
| 1107 |   | P     | RESISTOR |      | R3409   | 1-216-811-11 | METAL CHIP 150 5% 1/10W   |           |           |            |
| 1108 |   | P     | RESISTOR |      | R3451   | 1-216-801-11 | METAL CHIP 22 5% 1/10W    |           |           |            |
| 1109 |   | P     | RESISTOR |      | R3501   | 1-216-801-11 | METAL CHIP 22 5% 1/10W    |           |           |            |
| 1110 |   | P     | RESISTOR |      | R3503   | 1-216-864-11 | SHORT CHIP 0              |           |           |            |
| 1111 |   | P     | RESISTOR |      | R3504   | 1-216-864-11 | SHORT CHIP 0              |           |           |            |
| 1112 |   | P     | RESISTOR |      | R3507   | 1-216-864-11 | SHORT CHIP 0              |           |           |            |
| 1113 |   | P     | RESISTOR |      | R3508   | 1-216-864-11 | SHORT CHIP 0              |           |           |            |
| 1114 |   | P     | RESISTOR |      | R3509   | 1-218-823-11 | METAL CHIP 100 0.5% 1/10W |           |           |            |
| 1115 |   | P     | RESISTOR |      | R3511   | 1-216-864-11 | SHORT CHIP 0              |           |           |            |
| 1116 |   | P     | RESISTOR |      | R3512   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 1117 |   | P     | RESISTOR |      | R3513   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 1118 |   | P     | NETWORK  |      | RB3101  | 1-233-785-91 | RES, NETWORK 100 (1608)   |           |           |            |

| No.  | # | Board | Type         | △/* | Ref.No. | Part No.     | Description              | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|--------------|-----|---------|--------------|--------------------------|-----------|-----------|------------|
| 1119 |   | P     | NETWORK      |     | RB3102  | 1-233-785-91 | RES, NETWORK 100 (1608)  |           |           |            |
| 1120 |   | P     | NETWORK      |     | RB3103  | 1-234-370-21 | RES, NETWORK 22X4 (1005) |           |           |            |
| 1121 |   | P     | NETWORK      |     | RB3104  | 1-234-370-21 | RES, NETWORK 22X4 (1005) |           |           |            |
| 1122 |   | P     | NETWORK      |     | RB3105  | 1-234-370-21 | RES, NETWORK 22X4 (1005) |           |           |            |
| 1123 |   | P     | NETWORK      |     | RB3106  | 1-234-370-21 | RES, NETWORK 22X4 (1005) |           |           |            |
| 1124 |   | P     | NETWORK      |     | RB3107  | 1-234-370-21 | RES, NETWORK 22X4 (1005) |           |           |            |
| 1125 |   | P     | NETWORK      |     | RB3108  | 1-234-370-21 | RES, NETWORK 22X4 (1005) |           |           |            |
| 1126 |   | P     | NETWORK      |     | RB3109  | 1-234-370-21 | RES, NETWORK 22X4 (1005) |           |           |            |
| 1127 |   | P     | NETWORK      |     | RB3201  | 1-233-785-91 | RES, NETWORK 100 (1608)  |           |           |            |
| 1128 |   | P     | NETWORK      |     | RB3202  | 1-233-576-11 | RES, CHIP NETWORK 100    |           |           |            |
| 1129 |   | P     | NETWORK      |     | RB3203  | 1-233-576-11 | RES, CHIP NETWORK 100    |           |           |            |
| 1130 |   | P     | NETWORK      |     | RB3204  | 1-233-576-11 | RES, CHIP NETWORK 100    |           |           |            |
| 1131 |   | P     | NETWORK      |     | RB3205  | 1-233-785-91 | RES, NETWORK 100 (1608)  |           |           |            |
| 1132 |   | P     | NETWORK      |     | RB3206  | 1-233-576-11 | RES, CHIP NETWORK 100    |           |           |            |
| 1133 |   | P     | NETWORK      |     | RB3207  | 1-233-785-91 | RES, NETWORK 100 (1608)  |           |           |            |
| 1134 |   | P     | NETWORK      |     | RB3208  | 1-233-576-11 | RES, CHIP NETWORK 100    |           |           |            |
| 1135 |   | P     | NETWORK      |     | RB3209  | 1-236-908-11 | RES, CHIP NETWORK 10K    |           |           |            |
| 1136 |   | P     | NETWORK      |     | RB3210  | 1-233-785-91 | RES, NETWORK 100 (1608)  |           |           |            |
| 1137 |   | P     | NETWORK      |     | RB3211  | 1-233-576-11 | RES, CHIP NETWORK 100    |           |           |            |
| 1138 |   | P     | NETWORK      |     | RB3212  | 1-236-908-11 | RES, CHIP NETWORK 10K    |           |           |            |
| 1139 |   | P     | NETWORK      |     | RB3401  | 1-233-785-91 | RES, NETWORK 100 (1608)  |           |           |            |
| 1140 |   | P     | SWITCH       |     | S3201   | 1-692-271-21 | SWITCH, SLIDE            |           |           |            |
| 1141 |   | P     | CHIP CHECKER |     | TP3101  | 1-535-757-11 | CHIP, CHECKER            |           |           |            |
| 1142 |   | P     | CHIP CHECKER |     | TP3102  | 1-535-757-11 | CHIP, CHECKER            |           |           |            |
| 1143 |   | P     | CHIP CHECKER |     | TP3103  | 1-535-757-11 | CHIP, CHECKER            |           |           |            |
| 1144 |   | P     | CHIP CHECKER |     | TP3201  | 1-535-757-11 | CHIP, CHECKER            |           |           |            |
| 1145 |   | P     | CHIP CHECKER |     | TP3202  | 1-535-757-11 | CHIP, CHECKER            |           |           |            |
| 1146 |   | P     | CHIP CHECKER |     | TP3203  | 1-535-757-11 | CHIP, CHECKER            |           |           |            |
| 1147 |   | P     | CHIP CHECKER |     | TP3204  | 1-535-757-11 | CHIP, CHECKER            |           |           |            |
| 1148 |   | P     | CHIP CHECKER |     | TP3205  | 1-535-757-11 | CHIP, CHECKER            |           |           |            |
| 1149 |   | P     | CHIP CHECKER |     | TP3206  | 1-535-757-11 | CHIP, CHECKER            |           |           |            |
| 1150 |   | P     | CHIP CHECKER |     | TP3207  | 1-535-757-11 | CHIP, CHECKER            |           |           |            |
| 1151 |   | P     | CHIP CHECKER |     | TP3209  | 1-535-757-11 | CHIP, CHECKER            |           |           |            |
| 1152 |   | P     | CHIP CHECKER |     | TP3210  | 1-535-757-11 | CHIP, CHECKER            |           |           |            |
| 1153 |   | P     | CHIP CHECKER |     | TP3401  | 1-535-757-11 | CHIP, CHECKER            |           |           |            |
| 1154 |   | P     | CHIP CHECKER |     | TP3501  | 1-535-757-11 | CHIP, CHECKER            |           |           |            |
| 1155 |   | P     | CHIP CHECKER |     | TP3502  | 1-535-757-11 | CHIP, CHECKER            |           |           |            |
| 1156 |   | P     | VARISTOR     |     | VD3101  | 1-805-043-11 | ABSORBER, CHIP SURGE     |           |           |            |
| 1157 |   | P     | VARISTOR     |     | VD3102  | 1-805-043-11 | ABSORBER, CHIP SURGE     |           |           |            |
| 1158 |   | P     | VARISTOR     |     | VD3103  | 1-805-043-11 | ABSORBER, CHIP SURGE     |           |           |            |
| 1159 |   | P     | VARISTOR     |     | VD3104  | 1-805-043-11 | ABSORBER, CHIP SURGE     |           |           |            |
| 1160 |   | P     | VARISTOR     |     | VD3105  | 1-805-043-11 | ABSORBER, CHIP SURGE     |           |           |            |
| 1161 |   | P     | VARISTOR     |     | VD3106  | 1-805-043-11 | ABSORBER, CHIP SURGE     |           |           |            |

| No.  | # | Board | Type          | △/* | Ref.No. | Part No.     | Descrption                       | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|---------------|-----|---------|--------------|----------------------------------|-----------|-----------|------------|
| 1162 |   | P     | VARISTOR      |     | VD3107  | 1-805-043-11 | ABSORBER, CHIP SURGE             |           |           |            |
| 1163 |   | P     | VARISTOR      |     | VD3108  | 1-805-043-11 | ABSORBER, CHIP SURGE             |           |           |            |
| 1164 |   | P     | CRYSTAL       |     | X3201   | 1-781-514-21 | VIBRATOR, CRYSTAL                |           |           |            |
| 1165 |   | P     | CRYSTAL       |     | X3401   | 1-795-416-21 | VIBRATOR, CRYSTAL                |           |           |            |
| 1166 |   | F     | CAPACITOR     |     | C601    | 1-161-830-00 | CERAMIC 0.0047UF 99% 500V        |           |           |            |
| 1167 |   | F     | CAPACITOR     |     | C602    | 1-161-830-00 | CERAMIC 0.0047UF 99% 500V        |           |           |            |
| 1168 |   | F     | CAPACITOR     |     | C603    | 1-161-830-00 | CERAMIC 0.0047UF 99% 500V        |           |           |            |
| 1169 |   | F     | CAPACITOR     |     | C604    | 1-161-830-00 | CERAMIC 0.0047UF 99% 500V        |           |           |            |
| 1170 |   | F     | CAPACITOR     |     | C605    | 1-107-679-91 | ELECT 10UF 20.00% 450V           |           |           |            |
| 1171 |   | F     | CAPACITOR     |     | C607    | 1-101-821-00 | CERAMIC 0.0022UF 500V            |           |           |            |
| 1172 |   | F     | CAPACITOR     |     | C608    | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V    |           |           |            |
| 1173 |   | F     | CAPACITOR     |     | C609    | 1-107-533-11 | MYLAR 1UF 20.00% 250V            |           |           |            |
| 1174 |   | F     | CAPACITOR     |     | C610    | 1-164-161-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 1175 |   | F     | CAPACITOR     |     | C611    | 1-107-533-11 | MYLAR 1UF 20.00% 250V            |           |           |            |
| 1176 |   | F     | CAPACITOR     |     | C612    | 1-126-964-11 | ELECT 10UF 20.00% 50V            |           |           |            |
| 1177 |   | F     | CAPACITOR     |     | C614    | 1-102-228-00 | CERAMIC 470PF 10.00% 500V        |           |           |            |
| 1178 |   | F     | CAPACITOR     |     | C617    | 1-119-886-51 | CERAMIC 470PF 10.00% 250V        |           |           |            |
| 1179 |   | F     | CAPACITOR     |     | C618    | 1-102-228-00 | CERAMIC 470PF 10.00% 500V        |           |           |            |
| 1180 |   | F     | CAPACITOR     |     | C619    | 1-126-941-11 | ELECT 470UF 20.00% 25V           |           |           |            |
| 1181 |   | F     | CAPACITOR     |     | C620    | 1-164-004-11 | CERAMIC CHIP 0.1UF 10.00% 25V    |           |           |            |
| 1182 |   | F     | CAPACITOR     |     | C621    | 1-104-665-11 | ELECT 100UF 20.00% 25V           |           |           |            |
| 1183 |   | F     | CAPACITOR     |     | C622    | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V   |           |           |            |
| 1184 |   | F     | CONNECTOR     | *   | CN601   | 1-580-843-11 | PIN, CONNECTOR (POWER)           |           |           |            |
| 1185 |   | F     | CONNECTOR     | *   | CN603   | 1-580-843-11 | PIN, CONNECTOR (POWER)           |           |           |            |
| 1186 |   | F     | CONNECTOR     | *   | CN604   | 1-564-705-11 | PIN, CONNECTOR (SMALL TYPE) 3P   |           |           |            |
| 1187 |   | F     | DIODE         |     | D601    | 8-719-051-93 | DIODE DF06M-6031                 |           |           |            |
| 1188 |   | F     | DIODE         |     | D602    | 8-719-030-33 | DIODE EG01CV1                    |           |           |            |
| 1189 |   | F     | DIODE         |     | D603    | 8-719-063-74 | DIODE D1NL20U-TR2                |           |           |            |
| 1190 |   | F     | DIODE         |     | D604    | 8-719-063-74 | DIODE D1NL20U-TR2                |           |           |            |
| 1191 |   | F     | DIODE         |     | D605    | 8-719-041-97 | DIODE MA113-(TX)                 |           |           |            |
| 1192 |   | F     | FUSE          | △   | F601    | 1-576-697-11 | FUSE 15A 125V                    |           |           |            |
| 1193 |   | F     | IC            |     | IC601   | 6-703-136-01 | IC MIP2C20MP1SO                  |           |           |            |
| 1194 |   | F     | IC            |     | IC602   | 8-759-198-31 | IC UPC1093J-1-T                  |           |           |            |
| 1195 |   | F     | COIL          |     | L602    | 1-412-525-31 | INDUCTOR 10UH                    |           |           |            |
| 1196 |   | F     | PHOTO COUPLER |     | PH601   | 8-749-010-64 | PHOTO COUPLER PC123F2            |           |           |            |
| 1197 |   | F     | TRANSISTOR    |     | Q601    | 8-729-023-22 | TRANSISTOR 2SD2114K              |           |           |            |
| 1198 |   | F     | RESISTOR      |     | R601    | 1-218-642-11 | METAL OXIDE 100K 5% 1W           |           |           |            |
| 1199 |   | F     | RESISTOR      |     | R602    | 1-219-759-11 | METAL 1M 5% 1/2W                 |           |           |            |
| 1200 |   | F     | RESISTOR      |     | R603    | 1-216-111-00 | RES-CHIP 390K 5% 1/10W           |           |           |            |
| 1201 |   | F     | RESISTOR      |     | R604    | 1-249-402-11 | CARBON 56 5% 1/4W                |           |           |            |
| 1202 |   | F     | RESISTOR      |     | R605    | 1-216-077-91 | RES-CHIP 15K 5% 1/10W            |           |           |            |
| 1203 |   | F     | RESISTOR      |     | R606    | 1-216-017-91 | RES-CHIP 47 5% 1/10W             |           |           |            |
| 1204 |   | F     | RESISTOR      |     | R607    | 1-216-041-00 | RES-CHIP 470 5% 1/10W            |           |           |            |

| No.  | # | Board | Type        | △/* | Ref.No. | Part No.     | Descrption                       | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-------------|-----|---------|--------------|----------------------------------|-----------|-----------|------------|
| 1205 |   | F     | RESISTOR    |     | R608    | 1-216-081-00 | RES-CHIP 22K 5% 1/10W            |           |           |            |
| 1206 |   | F     | RESISTOR    |     | R609    | 1-216-077-91 | RES-CHIP 15K 5% 1/10W            |           |           |            |
| 1207 |   | F     | RESISTOR    |     | R610    | 1-216-065-91 | RES-CHIP 4.7K 5% 1/10W           |           |           |            |
| 1208 |   | F     | RESISTOR    |     | R611    | 1-216-077-91 | RES-CHIP 15K 5% 1/10W            |           |           |            |
| 1209 |   | F     | RESISTOR    |     | R614    | 1-216-360-11 | METAL OXIDE 8.2 5% 1W            |           |           |            |
| 1210 |   | F     | RELAY       |     | RY601   | 1-755-266-11 | RELAY, AC POWER                  |           |           |            |
| 1211 |   | F     | TRANSFORMER |     | T601    | 1-456-215-11 | COIL, LINE FILTER                |           |           |            |
| 1212 |   | F     | TRANSFORMER |     | T602    | 1-456-215-11 | COIL, LINE FILTER                |           |           |            |
| 1213 |   | F     | TRANSFORMER |     | T603    | 1-437-975-11 | TRANSFORMER, STAND-BY            |           |           |            |
| 1214 |   | F     | TRANSFORMER |     | T604    | 1-456-224-11 | COIL, LINE FILTER                |           |           |            |
| 1215 |   | F     | THERMISTOR  |     | TH601   | 1-803-586-11 | THERMISTOR, NTC                  |           |           |            |
| 1216 |   | F     | VARISTOR    |     | VDR601  | 1-803-830-31 | VARISTOR (ERZV14D621)            |           |           |            |
| 1217 |   | F     | VARISTOR    |     | VDR602  | 1-803-830-31 | VARISTOR (ERZV14D621)            |           |           |            |
| 1218 |   | K     | CAPACITOR   |     | C3001   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 1219 |   | K     | CAPACITOR   |     | C3002   | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V   |           |           |            |
| 1220 |   | K     | CAPACITOR   |     | C3003   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1221 |   | K     | CAPACITOR   |     | C3004   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1222 |   | K     | CAPACITOR   |     | C3005   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 1223 |   | K     | CAPACITOR   |     | C3006   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1224 |   | K     | CAPACITOR   |     | C3007   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 1225 |   | K     | CAPACITOR   |     | C3008   | 1-162-918-11 | CERAMIC CHIP 18PF 5.00% 50V      |           |           |            |
| 1226 |   | K     | CAPACITOR   |     | C3009   | 1-162-918-11 | CERAMIC CHIP 18PF 5.00% 50V      |           |           |            |
| 1227 |   | K     | CAPACITOR   |     | C3010   | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V  |           |           |            |
| 1228 |   | K     | CAPACITOR   |     | C3011   | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V |           |           |            |
| 1229 |   | K     | CAPACITOR   |     | C3012   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1230 |   | K     | CAPACITOR   |     | C3013   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1231 |   | K     | CAPACITOR   |     | C3014   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1232 |   | K     | CAPACITOR   |     | C3015   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 1233 |   | K     | CAPACITOR   |     | C3016   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1234 |   | K     | CAPACITOR   |     | C3017   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1235 |   | K     | CAPACITOR   |     | C3018   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 1236 |   | K     | CAPACITOR   |     | C3021   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 1237 |   | K     | CAPACITOR   |     | C3022   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1238 |   | K     | CAPACITOR   |     | C3023   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1239 |   | K     | CAPACITOR   |     | C3024   | 1-115-185-11 | CERAMIC CHIP 0.033UF 10.00% 50V  |           |           |            |
| 1240 |   | K     | CAPACITOR   |     | C3025   | 1-115-185-11 | CERAMIC CHIP 0.033UF 10.00% 50V  |           |           |            |
| 1241 |   | K     | CAPACITOR   |     | C3026   | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V    |           |           |            |
| 1242 |   | K     | CAPACITOR   |     | C3027   | 1-137-980-91 | CERAMIC CHIP 0.47UF 10% 50V      |           |           |            |
| 1243 |   | K     | CAPACITOR   |     | C3028   | 1-137-980-91 | CERAMIC CHIP 0.47UF 10% 50V      |           |           |            |
| 1244 |   | K     | CAPACITOR   |     | C3029   | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V    |           |           |            |
| 1245 |   | K     | CAPACITOR   |     | C3030   | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V    |           |           |            |
| 1246 |   | K     | CAPACITOR   |     | C3031   | 1-163-037-11 | CERAMIC CHIP 0.022UF 10.00% 50V  |           |           |            |
| 1247 |   | K     | CAPACITOR   |     | C3032   | 1-136-177-00 | FILM 1UF 5.00% 50V               |           |           |            |

| No.  | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                       | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-----|---------|--------------|----------------------------------|-----------|-----------|------------|
| 1248 |   | K     | CAPACITOR |     | C3033   | 1-136-177-00 | FILM 1UF 5.00% 50V               |           |           |            |
| 1249 |   | K     | CAPACITOR |     | C3034   | 1-163-037-11 | CERAMIC CHIP 0.022UF 10.00% 50V  |           |           |            |
| 1250 |   | K     | CAPACITOR |     | C3035   | 1-119-938-51 | ELECT 4700UF 20.00% 35V          |           |           |            |
| 1251 |   | K     | CAPACITOR |     | C3036   | 1-119-938-51 | ELECT 4700UF 20.00% 35V          |           |           |            |
| 1252 |   | K     | CAPACITOR |     | C3037   | 1-119-938-51 | ELECT 4700UF 20.00% 35V          |           |           |            |
| 1253 |   | K     | CAPACITOR |     | C3038   | 1-162-963-11 | CERAMIC CHIP 680PF 10.00% 50V    |           |           |            |
| 1254 |   | K     | CAPACITOR |     | C3039   | 1-162-963-11 | CERAMIC CHIP 680PF 10.00% 50V    |           |           |            |
| 1255 |   | K     | CAPACITOR |     | C3042   | 1-126-200-11 | ELECT CHIP 10UF 20.00% 35V       |           |           |            |
| 1256 |   | K     | CAPACITOR |     | C3043   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V   |           |           |            |
| 1257 |   | K     | CAPACITOR |     | C3044   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V   |           |           |            |
| 1258 |   | K     | CAPACITOR |     | C3045   | 1-117-319-11 | ELECT 4700UF 20.00% 25V          |           |           |            |
| 1259 |   | K     | CAPACITOR |     | C3046   | 1-117-319-11 | ELECT 4700UF 20.00% 25V          |           |           |            |
| 1260 |   | K     | CAPACITOR |     | C3047   | 1-162-963-11 | CERAMIC CHIP 680PF 10.00% 50V    |           |           |            |
| 1261 |   | K     | CAPACITOR |     | C3048   | 1-162-963-11 | CERAMIC CHIP 680PF 10.00% 50V    |           |           |            |
| 1262 |   | K     | CAPACITOR |     | C3049   | 1-117-319-11 | ELECT 4700UF 20.00% 25V          |           |           |            |
| 1263 |   | K     | CAPACITOR |     | C3050   | 1-117-319-11 | ELECT 4700UF 20.00% 25V          |           |           |            |
| 1264 |   | K     | CAPACITOR |     | C3051   | 1-115-339-11 | CERAMIC CHIP 0.1UF 10.00% 50V    |           |           |            |
| 1265 |   | K     | CAPACITOR |     | C3052   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1266 |   | K     | CAPACITOR |     | C3054   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V   |           |           |            |
| 1267 |   | K     | CAPACITOR |     | C3055   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V   |           |           |            |
| 1268 |   | K     | CAPACITOR |     | C3056   | 1-136-169-00 | FILM 0.22UF 5.00% 50V            |           |           |            |
| 1269 |   | K     | CAPACITOR |     | C3057   | 1-136-169-00 | FILM 0.22UF 5.00% 50V            |           |           |            |
| 1270 |   | K     | CAPACITOR |     | C3058   | 1-136-165-00 | FILM 0.1UF 5.00% 50V             |           |           |            |
| 1271 |   | K     | CAPACITOR |     | C3059   | 1-136-165-00 | FILM 0.1UF 5.00% 50V             |           |           |            |
| 1272 |   | K     | CAPACITOR |     | C3061   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1273 |   | K     | CAPACITOR |     | C3062   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1274 |   | K     | CAPACITOR |     | C3063   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 1275 |   | K     | CAPACITOR |     | C3064   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1276 |   | K     | CAPACITOR |     | C3065   | 1-128-006-11 | ELECT CHIP 4.7UF 20.00% 25V      |           |           |            |
| 1277 |   | K     | CAPACITOR |     | C3066   | 1-107-717-11 | ELECT 47UF 20.00% 50V            |           |           |            |
| 1278 |   | K     | CAPACITOR |     | C3067   | 1-126-948-11 | ELECT 100UF 20.00% 35V           |           |           |            |
| 1279 |   | K     | CONNECTOR | *   | CN3001  | 1-779-268-21 | PIN, CONNECTOR (1.5MM)(SMD)11P   |           |           |            |
| 1280 |   | K     | CONNECTOR | *   | CN3002  | 1-580-838-11 | PIN, CONNECTOR (PC BOARD) 4P     |           |           |            |
| 1281 |   | K     | CONNECTOR | *   | CN3003  | 1-766-175-11 | PIN, CONNECTOR (PC BOARD) 5P     |           |           |            |
| 1282 |   | K     | DIODE     |     | D3002   | 8-719-404-50 | DIODE MA111-TX                   |           |           |            |
| 1283 |   | K     | DIODE     |     | D3003   | 8-719-017-35 | DIODE 02DZ22-TPH3                |           |           |            |
| 1284 |   | K     | DIODE     |     | D3004   | 8-719-041-97 | DIODE MA113-(TX)                 |           |           |            |
| 1285 |   | K     | DIODE     |     | D3005   | 8-719-041-97 | DIODE MA113-(TX)                 |           |           |            |
| 1286 |   | K     | DIODE     |     | D3006   | 8-719-041-97 | DIODE MA113-(TX)                 |           |           |            |
| 1287 |   | K     | FUSE      | △   | F3001   | 1-576-458-21 | FUSE 6.3A 63V                    |           |           |            |
| 1288 |   | K     | FUSE      | △   | F3002   | 1-576-458-21 | FUSE 6.3A 63V                    |           |           |            |
| 1289 |   | K     | FUSE      | △   | F3003   | 1-576-458-21 | FUSE 6.3A 63V                    |           |           |            |
| 1290 |   | K     | FERRITE   |     | FB3001  | 1-414-229-11 | FERRITE 0UH                      |           |           |            |

| No.  | # | Board | Type       | △/* | Ref.No. | Part No.     | Descrption                  | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|------------|-----|---------|--------------|-----------------------------|-----------|-----------|------------|
| 1291 |   | K     | FERRITE    |     | FB3002  | 1-414-229-11 | FERRITE 0UH                 |           |           |            |
| 1292 |   | K     | FERRITE    |     | FB3003  | 1-414-229-11 | FERRITE 0UH                 |           |           |            |
| 1293 |   | K     | FERRITE    |     | FB3004  | 1-414-229-11 | FERRITE 0UH                 |           |           |            |
| 1294 |   | K     | FERRITE    |     | FB3005  | 1-414-229-11 | FERRITE 0UH                 |           |           |            |
| 1295 |   | K     | FERRITE    |     | FB3006  | 1-414-229-11 | FERRITE 0UH                 |           |           |            |
| 1296 |   | K     | FERRITE    |     | FB3008  | 1-414-864-11 | FERRITE 0UH                 |           |           |            |
| 1297 |   | K     | IC         |     | IC3001  | 6-702-979-01 | IC AK4114VQ-L               |           |           |            |
| 1298 |   | K     | IC         |     | IC3002  | 6-702-986-01 | IC TAS5001PFBR              |           |           |            |
| 1299 |   | K     | IC         |     | IC3003  | 6-702-980-01 | IC TAS5101DAPR              |           |           |            |
| 1300 |   | K     | IC         |     | IC3004  | 8-759-548-99 | IC SN74LV08APWR             |           |           |            |
| 1301 |   | K     | COIL       |     | L3001   | 1-412-537-31 | INDUCTOR 100UH              |           |           |            |
| 1302 |   | K     | COIL       |     | L3002   | 1-469-555-21 | INDUCTOR 10UH               |           |           |            |
| 1303 |   | K     | COIL       |     | L3003   | 1-469-555-21 | INDUCTOR 10UH               |           |           |            |
| 1304 |   | K     | COIL       |     | L3004   | 1-456-177-11 | INDUCTOR 22UH               |           |           |            |
| 1305 |   | K     | COIL       |     | L3005   | 1-456-177-11 | INDUCTOR 22UH               |           |           |            |
| 1306 |   | K     | COIL       |     | L3006   | 1-406-659-11 | INDUCTOR 10UH               |           |           |            |
| 1307 |   | K     | TRANSISTOR |     | Q3001   | 8-729-928-90 | TRANSISTOR DTC114EE         |           |           |            |
| 1308 |   | K     | TRANSISTOR |     | Q3002   | 8-729-106-68 | TRANSISTOR 2SD1615A-GP      |           |           |            |
| 1309 |   | K     | TRANSISTOR |     | Q3003   | 8-729-230-49 | TRANSISTOR 2SC2712-YG       |           |           |            |
| 1310 |   | K     | TRANSISTOR |     | Q3004   | 8-729-026-49 | TRANSISTOR 2SA1037AK-T146-R |           |           |            |
| 1311 |   | K     | TRANSISTOR |     | Q3005   | 8-729-230-49 | TRANSISTOR 2SC2712-YG       |           |           |            |
| 1312 |   | K     | TRANSISTOR |     | Q3006   | 8-729-230-49 | TRANSISTOR 2SC2712-YG       |           |           |            |
| 1313 |   | K     | TRANSISTOR |     | Q3007   | 8-729-106-68 | TRANSISTOR 2SD1615A-GP      |           |           |            |
| 1314 |   | K     | RESISTOR   |     | R3001   | 1-216-864-11 | SHORT CHIP 0                |           |           |            |
| 1315 |   | K     | RESISTOR   |     | R3002   | 1-216-817-11 | METAL CHIP 470 5% 1/10W     |           |           |            |
| 1316 |   | K     | RESISTOR   |     | R3003   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W    |           |           |            |
| 1317 |   | K     | RESISTOR   |     | R3004   | 1-216-836-11 | METAL CHIP 18K 5% 1/10W     |           |           |            |
| 1318 |   | K     | RESISTOR   |     | R3007   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W     |           |           |            |
| 1319 |   | K     | RESISTOR   |     | R3008   | 1-216-809-11 | METAL CHIP 100 5% 1/10W     |           |           |            |
| 1320 |   | K     | RESISTOR   |     | R3009   | 1-216-809-11 | METAL CHIP 100 5% 1/10W     |           |           |            |
| 1321 |   | K     | RESISTOR   |     | R3010   | 1-216-797-11 | METAL CHIP 10 5% 1/10W      |           |           |            |
| 1322 |   | K     | RESISTOR   |     | R3011   | 1-216-797-11 | METAL CHIP 10 5% 1/10W      |           |           |            |
| 1323 |   | K     | RESISTOR   |     | R3012   | 1-216-797-11 | METAL CHIP 10 5% 1/10W      |           |           |            |
| 1324 |   | K     | RESISTOR   |     | R3013   | 1-216-797-11 | METAL CHIP 10 5% 1/10W      |           |           |            |
| 1325 |   | K     | RESISTOR   |     | R3014   | 1-216-797-11 | METAL CHIP 10 5% 1/10W      |           |           |            |
| 1326 |   | K     | RESISTOR   |     | R3015   | 1-216-813-11 | METAL CHIP 220 5% 1/10W     |           |           |            |
| 1327 |   | K     | RESISTOR   |     | R3016   | 1-216-864-11 | SHORT CHIP 0                |           |           |            |
| 1328 |   | K     | RESISTOR   |     | R3019   | 1-216-994-11 | METAL CHIP 13K 5% 1/10W     |           |           |            |
| 1329 |   | K     | RESISTOR   |     | R3020   | 1-216-994-11 | METAL CHIP 13K 5% 1/10W     |           |           |            |
| 1330 |   | K     | RESISTOR   |     | R3022   | 1-249-381-11 | CARBON 1 5% 1/4W            |           |           |            |
| 1331 |   | K     | RESISTOR   |     | R3023   | 1-249-381-11 | CARBON 1 5% 1/4W            |           |           |            |
| 1332 |   | K     | RESISTOR   |     | R3026   | 1-214-871-81 | METAL 2K 1% 1/2W            |           |           |            |
| 1333 |   | K     | RESISTOR   |     | R3027   | 1-214-871-81 | METAL 2K 1% 1/2W            |           |           |            |

| No.  | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption               | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|-----|---------|--------------|--------------------------|-----------|-----------|------------|
| 1334 |   | K     | RESISTOR |     | R3028   | 1-214-871-81 | METAL 2K 1% 1/2W         |           |           |            |
| 1335 |   | K     | RESISTOR |     | R3029   | 1-214-871-81 | METAL 2K 1% 1/2W         |           |           |            |
| 1336 |   | K     | RESISTOR |     | R3030   | 1-215-872-11 | METAL OXIDE 3.3K 5% 1W   |           |           |            |
| 1337 |   | K     | RESISTOR |     | R3031   | 1-216-308-00 | RES-CHIP 4.7 5% 1/10W    |           |           |            |
| 1338 |   | K     | RESISTOR |     | R3032   | 1-216-308-00 | RES-CHIP 4.7 5% 1/10W    |           |           |            |
| 1339 |   | K     | RESISTOR |     | R3033   | 1-216-308-00 | RES-CHIP 4.7 5% 1/10W    |           |           |            |
| 1340 |   | K     | RESISTOR |     | R3034   | 1-216-308-00 | RES-CHIP 4.7 5% 1/10W    |           |           |            |
| 1341 |   | K     | RESISTOR |     | R3035   | 1-214-871-81 | METAL 2K 1% 1/2W         |           |           |            |
| 1342 |   | K     | RESISTOR |     | R3036   | 1-214-871-81 | METAL 2K 1% 1/2W         |           |           |            |
| 1343 |   | K     | RESISTOR |     | R3037   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 1344 |   | K     | RESISTOR |     | R3038   | 1-216-797-11 | METAL CHIP 10 5% 1/10W   |           |           |            |
| 1345 |   | K     | RESISTOR |     | R3039   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 1346 |   | K     | RESISTOR |     | R3040   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 1347 |   | K     | RESISTOR |     | R3041   | 1-214-871-81 | METAL 2K 1% 1/2W         |           |           |            |
| 1348 |   | K     | RESISTOR |     | R3042   | 1-214-871-81 | METAL 2K 1% 1/2W         |           |           |            |
| 1349 |   | K     | RESISTOR |     | R3043   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 1350 |   | K     | RESISTOR |     | R3044   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 1351 |   | K     | RESISTOR |     | R3045   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 1352 |   | K     | RESISTOR |     | R3046   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 1353 |   | K     | RESISTOR |     | R3047   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 1354 |   | K     | RESISTOR |     | R3048   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 1355 |   | K     | RESISTOR |     | R3049   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 1356 |   | K     | RESISTOR |     | R3050   | 1-216-797-11 | METAL CHIP 10 5% 1/10W   |           |           |            |
| 1357 |   | K     | RESISTOR |     | R3051   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 1358 |   | K     | RESISTOR |     | R3052   | 1-216-797-11 | METAL CHIP 10 5% 1/10W   |           |           |            |
| 1359 |   | K     | RESISTOR |     | R3054   | 1-216-797-11 | METAL CHIP 10 5% 1/10W   |           |           |            |
| 1360 |   | K     | RESISTOR |     | R3060   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W |           |           |            |
| 1361 |   | K     | RESISTOR |     | R3061   | 1-260-304-51 | CARBON 10 5% 1/2W        |           |           |            |
| 1362 |   | K     | RESISTOR |     | R3062   | 1-260-304-51 | CARBON 10 5% 1/2W        |           |           |            |
| 1363 |   | K     | RESISTOR |     | R3063   | 1-216-158-00 | RES-CHIP 22 5% 1/8W      |           |           |            |
| 1364 |   | K     | RESISTOR |     | R3064   | 1-216-158-00 | RES-CHIP 22 5% 1/8W      |           |           |            |
| 1365 |   | K     | RESISTOR |     | R3069   | 1-216-295-91 | SHORT CHIP 0             |           |           |            |
| 1366 |   | K     | RESISTOR |     | R3070   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 1367 |   | K     | RESISTOR |     | R3071   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 1368 |   | K     | RESISTOR |     | R3072   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 1369 |   | K     | RESISTOR |     | R3073   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 1370 |   | K     | RESISTOR |     | R3074   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 1371 |   | K     | RESISTOR |     | R3075   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 1372 |   | K     | RESISTOR |     | R3076   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W  |           |           |            |
| 1373 |   | K     | RESISTOR |     | R3077   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W  |           |           |            |
| 1374 |   | K     | RESISTOR |     | R3078   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W  |           |           |            |
| 1375 |   | K     | RESISTOR |     | R3079   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 1376 |   | K     | RESISTOR |     | R3080   | 1-216-847-11 | METAL CHIP 150K 5% 1/10W |           |           |            |



| No.  | # | Board | Type         | △/* | Ref.No. | Part No.     | Descrption                      | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|--------------|-----|---------|--------------|---------------------------------|-----------|-----------|------------|
| 1377 |   | K     | RESISTOR     |     | R3081   | 1-216-847-11 | METAL CHIP 150K 5% 1/10W        |           |           |            |
| 1378 |   | K     | RESISTOR     |     | R3082   | 1-216-847-11 | METAL CHIP 150K 5% 1/10W        |           |           |            |
| 1379 |   | K     | RESISTOR     |     | R3083   | 1-216-847-11 | METAL CHIP 150K 5% 1/10W        |           |           |            |
| 1380 |   | K     | RESISTOR     |     | R3084   | 1-218-879-11 | METAL CHIP 22K 0.5% 1/10W       |           |           |            |
| 1381 |   | K     | RESISTOR     |     | R3085   | 1-218-879-11 | METAL CHIP 22K 0.5% 1/10W       |           |           |            |
| 1382 |   | K     | CHIP CHECKER |     | TP3001  | 1-535-757-11 | CHIP, CHECKER                   |           |           |            |
| 1383 |   | K     | CHIP CHECKER |     | TP3002  | 1-535-757-11 | CHIP, CHECKER                   |           |           |            |
| 1384 |   | K     | CHIP CHECKER |     | TP3003  | 1-535-757-11 | CHIP, CHECKER                   |           |           |            |
| 1385 |   | K     | CHIP CHECKER |     | TP3004  | 1-535-757-11 | CHIP, CHECKER                   |           |           |            |
| 1386 |   | K     | CHIP CHECKER |     | TP3005  | 1-535-877-22 | CHIP, CHECKER                   |           |           |            |
| 1387 |   | K     | CHIP CHECKER |     | TP3006  | 1-535-877-22 | CHIP, CHECKER                   |           |           |            |
| 1388 |   | K     | CHIP CHECKER |     | TP3007  | 1-535-877-22 | CHIP, CHECKER                   |           |           |            |
| 1389 |   | K     | CRYSTAL      |     | X3001   | 1-795-420-21 | VIBRATOR, CRYSTAL               |           |           |            |
| 1390 |   | F2    | CAPACITOR    |     | C651    | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |
| 1391 |   | F2    | CAPACITOR    |     | C652    | 1-107-937-51 | ELECT 1000UF 20.00% 100V        |           |           |            |
| 1392 |   | F2    | CAPACITOR    |     | C653    | 1-107-937-51 | ELECT 1000UF 20.00% 100V        |           |           |            |
| 1393 |   | F2    | CAPACITOR    |     | C654    | 1-107-937-51 | ELECT 1000UF 20.00% 100V        |           |           |            |
| 1394 |   | F2    | CAPACITOR    |     | C655    | 1-107-937-51 | ELECT 1000UF 20.00% 100V        |           |           |            |
| 1395 |   | F2    | CAPACITOR    |     | C656    | 1-125-659-11 | ELECT(BLOCK) 1000UF 20.00% 250V |           |           |            |
| 1396 |   | F2    | CAPACITOR    |     | C657    | 1-125-659-11 | ELECT(BLOCK) 1000UF 20.00% 250V |           |           |            |
| 1397 |   | F2    | CAPACITOR    |     | C658    | 1-163-009-91 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |
| 1398 |   | F2    | CONNECTOR    |     | CN651   | 1-779-092-11 | PIN, CONNECTOR (PC BOARD) 10P   |           |           |            |
| 1399 |   | F2    | CONNECTOR    |     | CN652   | 1-779-092-11 | PIN, CONNECTOR (PC BOARD) 10P   |           |           |            |
| 1400 |   | F2    | CONNECTOR    | *   | CN653   | 1-564-705-11 | PIN, CONNECTOR (SMALL TYPE) 3P  |           |           |            |
| 1401 |   | F2    | DIODE        |     | D651    | 8-719-083-83 | DIODE UDZS-TE17-15B             |           |           |            |
| 1402 |   | F2    | DIODE        |     | D652    | 8-719-083-83 | DIODE UDZS-TE17-15B             |           |           |            |
| 1403 |   | F2    | DIODE        |     | D653    | 8-719-083-57 | DIODE UDZSTE-173.6B             |           |           |            |
| 1404 |   | F2    | DIODE        |     | D654    | 8-719-083-57 | DIODE UDZSTE-173.6B             |           |           |            |
| 1405 |   | F2    | TRANSISTOR   |     | Q651    | 8-729-044-42 | TRANSISTOR IRFI644G-LF36        |           |           |            |
| 1406 |   | F2    | TRANSISTOR   |     | Q652    | 8-729-044-42 | TRANSISTOR IRFI644G-LF36        |           |           |            |
| 1407 |   | F2    | RESISTOR     |     | R651    | 1-240-303-31 | CEMENTED 0.22 5% 10W            |           |           |            |
| 1408 |   | F2    | RESISTOR     |     | R652    | 1-216-001-00 | RES-CHIP 10 5% 1/10W            |           |           |            |
| 1409 |   | F2    | RESISTOR     |     | R653    | 1-202-962-11 | CEMENTED 3.3 5% 10W             |           |           |            |
| 1410 |   | F2    | RESISTOR     |     | R654    | 1-216-001-00 | RES-CHIP 10 5% 1/10W            |           |           |            |
| 1411 |   | F2    | RESISTOR     |     | R655    | 1-240-251-11 | CEMENTED 6.8 5% 10W             |           |           |            |
| 1412 |   | F2    | RESISTOR     |     | R656    | 1-240-251-11 | CEMENTED 6.8 5% 10W             |           |           |            |
| 1413 |   | F2    | RESISTOR     |     | R657    | 1-240-251-11 | CEMENTED 6.8 5% 10W             |           |           |            |
| 1414 |   | F2    | RESISTOR     |     | R658    | 1-240-251-11 | CEMENTED 6.8 5% 10W             |           |           |            |
| 1415 |   | F2    | RESISTOR     |     | R659    | 1-216-097-11 | RES-CHIP 100K 5% 1/10W          |           |           |            |
| 1416 |   | F2    | RESISTOR     |     | R660    | 1-216-097-11 | RES-CHIP 100K 5% 1/10W          |           |           |            |
| 1417 |   | A     | CAPACITOR    |     | C6001   | 1-104-665-11 | ELECT 100UF 20.00% 25V          |           |           |            |
| 1418 |   | A     | CAPACITOR    |     | C6002   | 1-165-529-11 | MYLAR 0.22UF 10 275V            |           |           |            |
| 1419 |   | A     | CAPACITOR    |     | C6003   | 1-126-934-11 | ELECT 220UF 20.00% 16V          |           |           |            |

| No.  | # | Board | Type      | △/* | Ref.No. | Part No.     | Description  |          |             | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-----|---------|--------------|--------------|----------|-------------|-----------|-----------|------------|
| 1420 |   | A     | CAPACITOR |     | C6004   | 1-104-665-11 | ELECT        | 100UF    | 20.00% 25V  |           |           |            |
| 1421 |   | A     | CAPACITOR |     | C6005   | 1-165-528-11 | MYLAR        | 0.1UF    | 10 275V     |           |           |            |
| 1422 |   | A     | CAPACITOR |     | C6006   | 1-161-964-91 | CERAMIC      | 0.0047UF | 250V        |           |           |            |
| 1423 |   | A     | CAPACITOR |     | C6007   | 1-161-964-91 | CERAMIC      | 0.0047UF | 250V        |           |           |            |
| 1424 |   | A     | CAPACITOR |     | C6008   | 1-161-964-91 | CERAMIC      | 0.0047UF | 250V        |           |           |            |
| 1425 |   | A     | CAPACITOR |     | C6009   | 1-161-964-91 | CERAMIC      | 0.0047UF | 250V        |           |           |            |
| 1426 |   | A     | CAPACITOR |     | C6010   | 1-137-992-11 | ELECT        | 1000UF   | 20% 250V    |           |           |            |
| 1427 |   | A     | CAPACITOR |     | C6011   | 1-137-992-11 | ELECT        | 1000UF   | 20% 250V    |           |           |            |
| 1428 |   | A     | CAPACITOR |     | C6012   | 1-163-275-11 | CERAMIC CHIP | 0.001UF  | 5.00% 50V   |           |           |            |
| 1429 |   | A     | CAPACITOR |     | C6013   | 1-136-479-11 | FILM         | 0.001UF  | 5.00% 100V  |           |           |            |
| 1430 |   | A     | CAPACITOR |     | C6014   | 1-163-021-91 | CERAMIC CHIP | 0.01UF   | 10.00% 50V  |           |           |            |
| 1431 |   | A     | CAPACITOR |     | C6017   | 1-126-967-11 | ELECT        | 47UF     | 20.00% 50V  |           |           |            |
| 1432 |   | A     | CAPACITOR |     | C6018   | 1-126-963-11 | ELECT        | 4.7UF    | 20.00% 50V  |           |           |            |
| 1433 |   | A     | CAPACITOR |     | C6019   | 1-107-906-11 | ELECT        | 10UF     | 20.00% 50V  |           |           |            |
| 1434 |   | A     | CAPACITOR |     | C6022   | 1-130-495-00 | MYLAR        | 0.1UF    | 5.00% 50V   |           |           |            |
| 1435 |   | A     | CAPACITOR |     | C6023   | 1-126-947-11 | ELECT        | 47UF     | 20.00% 35V  |           |           |            |
| 1436 |   | A     | CAPACITOR |     | C6024   | 1-164-004-11 | CERAMIC CHIP | 0.1UF    | 10.00% 25V  |           |           |            |
| 1437 |   | A     | CAPACITOR |     | C6025   | 1-107-662-11 | ELECT        | 22UF     | 20.00% 350V |           |           |            |
| 1438 |   | A     | CAPACITOR |     | C6026   | 1-101-821-00 | CERAMIC      | 0.0022UF | 500V        |           |           |            |
| 1439 |   | A     | CAPACITOR |     | C6027   | 1-107-824-11 | CERAMIC      | 220PF    | 5.00% 1KV   |           |           |            |
| 1440 |   | A     | CAPACITOR |     | C6028   | 1-107-824-11 | CERAMIC      | 220PF    | 5.00% 1KV   |           |           |            |
| 1441 |   | A     | CAPACITOR |     | C6029   | 1-126-964-11 | ELECT        | 10UF     | 20.00% 50V  |           |           |            |
| 1442 |   | A     | CAPACITOR |     | C6030   | 1-164-690-91 | CERAMIC CHIP | 0.0022UF | 5.00% 50V   |           |           |            |
| 1443 |   | A     | CAPACITOR |     | C6031   | 1-100-418-11 | FILM         | 15000PF  | 3% 1KV      |           |           |            |
| 1444 |   | A     | CAPACITOR |     | C6032   | 1-128-795-91 | ELECT CHIP   | 470PF    | 10% 630V    |           |           |            |
| 1445 |   | A     | CAPACITOR |     | C6033   | 1-107-894-11 | ELECT        | 220UF    | 20.00% 35V  |           |           |            |
| 1446 |   | A     | CAPACITOR |     | C6034   | 1-161-964-91 | CERAMIC      | 0.0047UF | 250V        |           |           |            |
| 1447 |   | A     | CAPACITOR |     | C6035   | 1-161-964-91 | CERAMIC      | 0.0047UF | 250V        |           |           |            |
| 1448 |   | A     | CAPACITOR |     | C6036   | 1-162-962-11 | CERAMIC CHIP | 470PF    | 10.00% 50V  |           |           |            |
| 1449 |   | A     | CAPACITOR |     | C6037   | 1-126-967-11 | ELECT        | 47UF     | 20.00% 50V  |           |           |            |
| 1450 |   | A     | CAPACITOR |     | C6039   | 1-126-935-11 | ELECT        | 470UF    | 20.00% 16V  |           |           |            |
| 1451 |   | A     | CAPACITOR |     | C6040   | 1-128-582-11 | ELECT        | 10UF     | 20.00% 100V |           |           |            |
| 1452 |   | A     | CAPACITOR |     | C6042   | 1-164-004-11 | CERAMIC CHIP | 0.1UF    | 10.00% 25V  |           |           |            |
| 1453 |   | A     | CAPACITOR |     | C6043   | 1-126-926-11 | ELECT        | 1000UF   | 20.00% 10V  |           |           |            |
| 1454 |   | A     | CAPACITOR |     | C6044   | 1-137-991-21 | ELECT        | 3900UF   | 20% 10V     |           |           |            |
| 1455 |   | A     | CAPACITOR |     | C6046   | 1-104-665-11 | ELECT        | 100UF    | 20.00% 25V  |           |           |            |
| 1456 |   | A     | CAPACITOR |     | C6047   | 1-137-991-21 | ELECT        | 3900UF   | 20% 10V     |           |           |            |
| 1457 |   | A     | CAPACITOR |     | C6048   | 1-165-729-31 | ELECT        | 470UF    | 20% 16V     |           |           |            |
| 1458 |   | A     | CAPACITOR |     | C6049   | 1-136-169-00 | FILM         | 0.22UF   | 5.00% 50V   |           |           |            |
| 1459 |   | A     | CAPACITOR |     | C6050   | 1-164-004-11 | CERAMIC CHIP | 0.1UF    | 10.00% 25V  |           |           |            |
| 1460 |   | A     | CAPACITOR |     | C6051   | 1-126-935-11 | ELECT        | 470UF    | 20.00% 16V  |           |           |            |
| 1461 |   | A     | CAPACITOR |     | C6052   | 1-126-947-11 | ELECT        | 47UF     | 20.00% 35V  |           |           |            |
| 1462 |   | A     | CAPACITOR |     | C6054   | 1-110-501-11 | CERAMIC CHIP | 0.33UF   | 10.00% 16V  |           |           |            |

| No.  | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                       | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-----|---------|--------------|----------------------------------|-----------|-----------|------------|
| 1463 |   | A     | CAPACITOR |     | C6055   | 1-110-501-11 | CERAMIC CHIP 0.33UF 10.00% 16V   |           |           |            |
| 1464 |   | A     | CAPACITOR |     | C6056   | 1-126-960-11 | ELECT 1UF 20.00% 50V             |           |           |            |
| 1465 |   | A     | CAPACITOR |     | C6057   | 1-126-947-11 | ELECT 47UF 20.00% 35V            |           |           |            |
| 1466 |   | A     | CAPACITOR |     | C6058   | 1-126-934-11 | ELECT 220UF 20.00% 16V           |           |           |            |
| 1467 |   | A     | CAPACITOR |     | C6059   | 1-126-934-11 | ELECT 220UF 20.00% 16V           |           |           |            |
| 1468 |   | A     | CAPACITOR |     | C6060   | 1-130-494-11 | MYLAR 0.082UF 5.00% 50V          |           |           |            |
| 1469 |   | A     | CAPACITOR |     | C6062   | 1-128-581-11 | ELECT 4.7UF 20.00% 100V          |           |           |            |
| 1470 |   | A     | CAPACITOR |     | C6064   | 1-130-497-00 | MYLAR 0.15UF 5.00% 50V           |           |           |            |
| 1471 |   | A     | CAPACITOR |     | C6070   | 1-119-888-51 | CERAMIC 2200PF 20.00% 250V       |           |           |            |
| 1472 |   | A     | CAPACITOR |     | C6071   | 1-119-888-51 | CERAMIC 2200PF 20.00% 250V       |           |           |            |
| 1473 |   | A     | CAPACITOR |     | C6107   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V           |           |           |            |
| 1474 |   | A     | CAPACITOR |     | C6200   | 1-128-407-11 | ELECT CHIP 47UF 20.00% 50V       |           |           |            |
| 1475 |   | A     | CAPACITOR |     | C6201   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 1476 |   | A     | CAPACITOR |     | C6202   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 1477 |   | A     | CAPACITOR |     | C6203   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 1478 |   | A     | CAPACITOR |     | C6204   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 1479 |   | A     | CAPACITOR |     | C6205   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 1480 |   | A     | CAPACITOR |     | C6207   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 1481 |   | A     | CAPACITOR |     | C6208   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 1482 |   | A     | CAPACITOR |     | C6209   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1483 |   | A     | CAPACITOR |     | C6210   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 1484 |   | A     | CAPACITOR |     | C6211   | 1-127-804-91 | CERAMIC CHIP 100PF 10% 50V       |           |           |            |
| 1485 |   | A     | CAPACITOR |     | C6212   | 1-115-156-11 | CERAMIC CHIP 1UF 10V             |           |           |            |
| 1486 |   | A     | CAPACITOR |     | C6213   | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V  |           |           |            |
| 1487 |   | A     | CAPACITOR |     | C6214   | 1-162-961-11 | CERAMIC CHIP 330PF 10.00% 50V    |           |           |            |
| 1488 |   | A     | CAPACITOR |     | C6215   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 1489 |   | A     | CAPACITOR |     | C6216   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 1490 |   | A     | CAPACITOR |     | C6217   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 1491 |   | A     | CAPACITOR |     | C6218   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 1492 |   | A     | CAPACITOR |     | C6219   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 1493 |   | A     | CAPACITOR |     | C6220   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V           |           |           |            |
| 1494 |   | A     | CAPACITOR |     | C6221   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 1495 |   | A     | CAPACITOR |     | C6222   | 1-126-947-11 | ELECT 47UF 20.00% 35V            |           |           |            |
| 1496 |   | A     | CAPACITOR |     | C6223   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 1497 |   | A     | CAPACITOR |     | C6224   | 1-127-804-91 | CERAMIC CHIP 100PF 10% 50V       |           |           |            |
| 1498 |   | A     | CAPACITOR |     | C6225   | 1-115-156-11 | CERAMIC CHIP 1UF 10V             |           |           |            |
| 1499 |   | A     | CAPACITOR |     | C6226   | 1-107-778-11 | ELECT CHIP 470UF 20.00% 16V      |           |           |            |
| 1500 |   | A     | CAPACITOR |     | C6227   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1501 |   | A     | CAPACITOR |     | C6228   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 1502 |   | A     | CAPACITOR |     | C6229   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 1503 |   | A     | CAPACITOR |     | C6230   | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V  |           |           |            |
| 1504 |   | A     | CAPACITOR |     | C6231   | 1-162-961-11 | CERAMIC CHIP 330PF 10.00% 50V    |           |           |            |
| 1505 |   | A     | CAPACITOR |     | C6233   | 1-128-594-11 | ELECT CHIP 1UF 20.00% 50V        |           |           |            |

| No.  | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                     | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-----|---------|--------------|--------------------------------|-----------|-----------|------------|
| 1506 |   | A     | CAPACITOR |     | C6234   | 1-128-594-11 | ELECT CHIP 1UF 20.00% 50V      |           |           |            |
| 1507 |   | A     | CAPACITOR |     | C6235   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 1508 |   | A     | CAPACITOR |     | C6236   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V    |           |           |            |
| 1509 |   | A     | CAPACITOR |     | C6239   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V |           |           |            |
| 1510 |   | A     | CAPACITOR |     | C6240   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V |           |           |            |
| 1511 |   | A     | CONNECTOR | *   | CN6001  | 1-691-960-11 | PIN, CONNECTOR (PC BOARD) 3P   |           |           |            |
| 1512 |   | A     | CONNECTOR | *   | CN6002  | 1-766-240-11 | PIN, CONNECTOR (PC BOARD) 2P   |           |           |            |
| 1513 |   | A     | CONNECTOR | *   | CN6003  | 1-766-240-11 | PIN, CONNECTOR (PC BOARD) 2P   |           |           |            |
| 1514 |   | A     | CONNECTOR | *   | CN6004  | 1-691-757-11 | PIN, CONNECTOR (PC BOARD) 8P   |           |           |            |
| 1515 |   | A     | CONNECTOR |     | CN6005  | 1-695-915-11 | TAB (CONTACT)                  |           |           |            |
| 1516 |   | A     | CONNECTOR | *   | CN6101  | 1-566-761-11 | PIN, CONNECTOR (PC BOARD) 6P   |           |           |            |
| 1517 |   | A     | CONNECTOR |     | CN6201  | 1-779-339-21 | CONNECTOR, FFC/FPC 30P         |           |           |            |
| 1518 |   | A     | CONNECTOR | *   | CN6203  | 1-566-763-11 | PIN, CONNECTOR (PC BOARD) 8P   |           |           |            |
| 1519 |   | A     | CONNECTOR | *   | CN6204  | 1-566-764-11 | PIN, CONNECTOR (PC BOARD) 9P   |           |           |            |
| 1520 |   | A     | CONNECTOR | *   | CN6205  | 1-564-507-11 | PLUG, CONNECTOR 4P             |           |           |            |
| 1521 |   | A     | CONNECTOR | *   | CN6210  | 1-566-767-11 | PIN, CONNECTOR (PC BOARD) 12P  |           |           |            |
| 1522 |   | A     | CONNECTOR |     | CN6211  | 1-794-052-21 | FFC/FPC G96 (LIF(NON-ZIF))32P  |           |           |            |
| 1523 |   | A     | CONNECTOR |     | CN6212  | 1-695-915-11 | TAB (CONTACT)                  |           |           |            |
| 1524 |   | A     | DIODE     |     | D6001   | 8-719-404-50 | DIODE MA111-TX                 |           |           |            |
| 1525 |   | A     | DIODE     |     | D6002   | 8-719-085-58 | DIODE EC30HA03L-TE12L          |           |           |            |
| 1526 |   | A     | DIODE     |     | D6003   | 8-719-158-09 | DIODE RD4.7SB2                 |           |           |            |
| 1527 |   | A     | DIODE     |     | D6004   | 8-719-077-77 | DIODE D3SB60F3                 |           |           |            |
| 1528 |   | A     | DIODE     |     | D6005   | 8-719-068-00 | DIODE ERC04-06SE               |           |           |            |
| 1529 |   | A     | DIODE     |     | D6006   | 8-719-068-00 | DIODE ERC04-06SE               |           |           |            |
| 1530 |   | A     | DIODE     |     | D6007   | 8-719-510-43 | DIODE S1WB60B                  |           |           |            |
| 1531 |   | A     | DIODE     |     | D6008   | 8-719-979-64 | DIODE UF4005PKG23              |           |           |            |
| 1532 |   | A     | DIODE     |     | D6009   | 8-719-510-48 | DIODE D1N20R                   |           |           |            |
| 1533 |   | A     | DIODE     |     | D6010   | 8-719-510-48 | DIODE D1N20R                   |           |           |            |
| 1534 |   | A     | DIODE     |     | D6011   | 8-719-948-45 | DIODE ERA22-08                 |           |           |            |
| 1535 |   | A     | DIODE     |     | D6012   | 8-719-510-48 | DIODE D1N20R                   |           |           |            |
| 1536 |   | A     | DIODE     |     | D6013   | 8-719-510-48 | DIODE D1N20R                   |           |           |            |
| 1537 |   | A     | DIODE     |     | D6014   | 8-719-404-50 | DIODE MA111-TX                 |           |           |            |
| 1538 |   | A     | DIODE     |     | D6015   | 8-719-063-73 | DIODE D1NL20U-TR               |           |           |            |
| 1539 |   | A     | DIODE     |     | D6016   | 8-719-063-73 | DIODE D1NL20U-TR               |           |           |            |
| 1540 |   | A     | DIODE     |     | D6017   | 8-719-041-97 | DIODE MA113-(TX)               |           |           |            |
| 1541 |   | A     | DIODE     |     | D6018   | 8-719-063-73 | DIODE D1NL20U-TR               |           |           |            |
| 1542 |   | A     | DIODE     |     | D6019   | 8-719-063-73 | DIODE D1NL20U-TR               |           |           |            |
| 1543 |   | A     | DIODE     |     | D6020   | 8-719-510-39 | DIODE D10LC20U                 |           |           |            |
| 1544 |   | A     | DIODE     |     | D6021   | 8-719-063-73 | DIODE D1NL20U-TR               |           |           |            |
| 1545 |   | A     | DIODE     |     | D6023   | 8-719-055-40 | DIODE FCQ30A04                 |           |           |            |
| 1546 |   | A     | DIODE     |     | D6024   | 8-719-055-40 | DIODE FCQ30A04                 |           |           |            |
| 1547 |   | A     | DIODE     |     | D6025   | 8-719-404-50 | DIODE MA111-TX                 |           |           |            |
| 1548 |   | A     | DIODE     |     | D6026   | 8-719-033-53 | DIODE RD6.8SB2-T1              |           |           |            |

| No.  | # | Board | Type        | △ /* | Ref.No. | Part No.     | Descrption          | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-------------|------|---------|--------------|---------------------|-----------|-----------|------------|
| 1549 |   | A     | DIODE       |      | D6027   | 8-719-404-50 | DIODE MA111-TX      |           |           |            |
| 1550 |   | A     | DIODE       |      | D6028   | 8-719-041-97 | DIODE MA113-(TX)    |           |           |            |
| 1551 |   | A     | DIODE       |      | D6029   | 8-719-404-50 | DIODE MA111-TX      |           |           |            |
| 1552 |   | A     | DIODE       |      | D6030   | 8-719-404-50 | DIODE MA111-TX      |           |           |            |
| 1553 |   | A     | DIODE       |      | D6031   | 8-719-404-50 | DIODE MA111-TX      |           |           |            |
| 1554 |   | A     | DIODE       |      | D6032   | 8-719-983-37 | DIODE MTZJ-T-77-36A |           |           |            |
| 1555 |   | A     | DIODE       |      | D6035   | 8-719-158-55 | DIODE RD15SB        |           |           |            |
| 1556 |   | A     | DIODE       |      | D6036   | 8-719-158-55 | DIODE RD15SB        |           |           |            |
| 1557 |   | A     | DIODE       |      | D6101   | 8-719-404-50 | DIODE MA111-TX      |           |           |            |
| 1558 |   | A     | DIODE       |      | D6102   | 8-719-404-50 | DIODE MA111-TX      |           |           |            |
| 1559 |   | A     | DIODE       |      | D6205   | 8-719-158-02 | DIODE RD3.9SB2      |           |           |            |
| 1560 |   | A     | FUSE        | △    | F6001   | 1-576-231-11 | FUSE 4A 250V        |           |           |            |
| 1561 |   | A     | FERRITE     |      | FB6001  | 1-410-396-41 | FERRITE 0.45UH      |           |           |            |
| 1562 |   | A     | FERRITE     |      | FB6002  | 1-410-397-21 | FERRITE 1.1UH       |           |           |            |
| 1563 |   | A     | FERRITE     |      | FB6003  | 1-410-397-21 | FERRITE 1.1UH       |           |           |            |
| 1564 |   | A     | FERRITE     |      | FB6005  | 1-410-397-21 | FERRITE 1.1UH       |           |           |            |
| 1565 |   | A     | FERRITE     |      | FB6006  | 1-410-397-21 | FERRITE 1.1UH       |           |           |            |
| 1566 |   | A     | FERRITE     |      | FB6200  | 1-216-295-91 | SHORT CHIP 0        |           |           |            |
| 1567 |   | A     | FERRITE     |      | FB6201  | 1-216-295-91 | SHORT CHIP 0        |           |           |            |
| 1568 |   | A     | FERRITE     |      | FB6202  | 1-216-295-91 | SHORT CHIP 0        |           |           |            |
| 1569 |   | A     | FERRITE     |      | FB6203  | 1-414-233-22 | FERRITE 0UH         |           |           |            |
| 1570 |   | A     | FERRITE     |      | FB6204  | 1-414-233-22 | FERRITE 0UH         |           |           |            |
| 1571 |   | A     | FERRITE     |      | FB6205  | 1-216-295-91 | SHORT CHIP 0        |           |           |            |
| 1572 |   | A     | FERRITE     |      | FB6206  | 1-216-295-91 | SHORT CHIP 0        |           |           |            |
| 1573 |   | A     | FERRITE     |      | FB6207  | 1-216-295-91 | SHORT CHIP 0        |           |           |            |
| 1574 |   | A     | FERRITE     |      | FB6208  | 1-216-295-91 | SHORT CHIP 0        |           |           |            |
| 1575 |   | A     | FERRITE     |      | FB6209  | 1-414-233-22 | FERRITE 0UH         |           |           |            |
| 1576 |   | A     | FERRITE     |      | FB6210  | 1-414-233-22 | FERRITE 0UH         |           |           |            |
| 1577 |   | A     | FERRITE     |      | FB6211  | 1-216-295-91 | SHORT CHIP 0        |           |           |            |
| 1578 |   | A     | FERRITE     |      | FB6212  | 1-216-295-91 | SHORT CHIP 0        |           |           |            |
| 1579 |   | A     | FUSE HOLDER |      | FH6001  | 1-533-223-11 | FUSE HOLDER 0A 0V   |           |           |            |
| 1580 |   | A     | FUSE HOLDER |      | FH6002  | 1-533-223-11 | FUSE HOLDER 0A 0V   |           |           |            |
| 1581 |   | A     | IC          |      | IC6001  | 8-759-640-19 | IC PQ1CG2032FZ      |           |           |            |
| 1582 |   | A     | IC          |      | IC6002  | 8-759-670-30 | IC MCZ3001D         |           |           |            |
| 1583 |   | A     | IC          |      | IC6003  | 6-703-136-01 | IC MIP2C20MP1SO     |           |           |            |
| 1584 |   | A     | IC          |      | IC6004  | 8-759-198-31 | IC UPC1093J-1-T     |           |           |            |
| 1585 |   | A     | IC          |      | IC6005  | 8-759-198-31 | IC UPC1093J-1-T     |           |           |            |
| 1586 |   | A     | IC          |      | IC6006  | 6-700-898-01 | IC PQ05RD21         |           |           |            |
| 1587 |   | A     | IC          |      | IC6007  | 8-759-459-99 | IC PQ09RD11         |           |           |            |
| 1588 |   | A     | IC          |      | IC6008  | 8-759-009-51 | IC MC14538BF        |           |           |            |
| 1589 |   | A     | IC          |      | IC6200  | 8-752-072-94 | IC CXA1875AM-T4     |           |           |            |
| 1590 |   | A     | COIL        |      | L6001   | 1-419-249-11 | INDUCTOR 15UH       |           |           |            |
| 1591 |   | A     | COIL        |      | L6002   | 1-412-525-31 | INDUCTOR 10UH       |           |           |            |

| No.  | # | Board | Type          | △/* | Ref.No. | Part No.     | Descrption                 | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|---------------|-----|---------|--------------|----------------------------|-----------|-----------|------------|
| 1592 |   | A     | COIL          |     | L6004   | 1-412-521-31 | INDUCTOR 4.7UH             |           |           |            |
| 1593 |   | A     | COIL          |     | L6005   | 1-412-521-31 | INDUCTOR 4.7UH             |           |           |            |
| 1594 |   | A     | COIL          |     | L6006   | 1-412-525-31 | INDUCTOR 10UH              |           |           |            |
| 1595 |   | A     | COIL          |     | L6007   | 1-412-521-31 | INDUCTOR 4.7UH             |           |           |            |
| 1596 |   | A     | COIL          |     | L6008   | 1-412-525-31 | INDUCTOR 10UH              |           |           |            |
| 1597 |   | A     | COIL          |     | L6009   | 1-412-525-31 | INDUCTOR 10UH              |           |           |            |
| 1598 |   | A     | COIL          |     | L6200   | 1-416-510-21 | INDUCTOR 100UH             |           |           |            |
| 1599 |   | A     | COIL          |     | L6201   | 1-416-510-21 | INDUCTOR 100UH             |           |           |            |
| 1600 |   | A     | COIL          |     | L6202   | 1-416-344-11 | INDUCTOR 10UH              |           |           |            |
| 1601 |   | A     | COIL          |     | L6203   | 1-416-510-21 | INDUCTOR 100UH             |           |           |            |
| 1602 |   | A     | COIL          |     | L6204   | 1-416-510-21 | INDUCTOR 100UH             |           |           |            |
| 1603 |   | A     | COIL          |     | L6205   | 1-416-344-11 | INDUCTOR 10UH              |           |           |            |
| 1604 |   | A     | COIL          |     | L6206   | 1-416-510-21 | INDUCTOR 100UH             |           |           |            |
| 1605 |   | A     | PHOTO COUPLER |     | PH6001  | 8-749-016-81 | PHOTO COUPLER PC123Y22     |           |           |            |
| 1606 |   | A     | PHOTO COUPLER |     | PH6002  | 8-749-924-35 | PHOTO COUPLER ON3171-R     |           |           |            |
| 1607 |   | A     | PHOTO COUPLER |     | PH6003  | 8-749-924-35 | PHOTO COUPLER ON3171-R     |           |           |            |
| 1608 |   | A     | FUSE          | △   | PS6001  | 1-576-607-11 | FUSE 6.3A 125V             |           |           |            |
| 1609 |   | A     | FUSE          | △   | PS6002  | 1-576-607-11 | FUSE 6.3A 125V             |           |           |            |
| 1610 |   | A     | TRANSISTOR    |     | Q6001   | 8-729-900-53 | TRANSISTOR DTC114EK        |           |           |            |
| 1611 |   | A     | TRANSISTOR    |     | Q6002   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX    |           |           |            |
| 1612 |   | A     | TRANSISTOR    |     | Q6003   | 8-729-052-32 | TRANSISTOR IRFIB7N50A-LF31 |           |           |            |
| 1613 |   | A     | TRANSISTOR    |     | Q6004   | 8-729-052-32 | TRANSISTOR IRFIB7N50A-LF31 |           |           |            |
| 1614 |   | A     | TRANSISTOR    |     | Q6006   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX    |           |           |            |
| 1615 |   | A     | TRANSISTOR    |     | Q6009   | 8-729-216-22 | TRANSISTOR 2SA1162-G       |           |           |            |
| 1616 |   | A     | TRANSISTOR    |     | Q6010   | 8-729-023-22 | TRANSISTOR 2SD2114K        |           |           |            |
| 1617 |   | A     | TRANSISTOR    |     | Q6011   | 1-801-806-11 | TR DTC144EKA               |           |           |            |
| 1618 |   | A     | TRANSISTOR    |     | Q6012   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX    |           |           |            |
| 1619 |   | A     | TRANSISTOR    |     | Q6013   | 8-729-216-22 | TRANSISTOR 2SA1162-G       |           |           |            |
| 1620 |   | A     | TRANSISTOR    |     | Q6014   | 8-729-140-96 | TRANSISTOR 2SD774-34       |           |           |            |
| 1621 |   | A     | TRANSISTOR    |     | Q6200   | 8-729-422-29 | TRANSISTOR 2SD601A-S       |           |           |            |
| 1622 |   | A     | TRANSISTOR    |     | Q6201   | 8-729-216-22 | TRANSISTOR 2SA1162-G       |           |           |            |
| 1623 |   | A     | TRANSISTOR    |     | Q6202   | 8-729-422-29 | TRANSISTOR 2SD601A-S       |           |           |            |
| 1624 |   | A     | TRANSISTOR    |     | Q6203   | 8-729-422-29 | TRANSISTOR 2SD601A-S       |           |           |            |
| 1625 |   | A     | TRANSISTOR    |     | Q6204   | 8-729-216-22 | TRANSISTOR 2SA1162-G       |           |           |            |
| 1626 |   | A     | TRANSISTOR    |     | Q6205   | 8-729-422-29 | TRANSISTOR 2SD601A-S       |           |           |            |
| 1627 |   | A     | TRANSISTOR    |     | Q6206   | 8-729-422-29 | TRANSISTOR 2SD601A-S       |           |           |            |
| 1628 |   | A     | TRANSISTOR    |     | Q6207   | 8-729-422-29 | TRANSISTOR 2SD601A-S       |           |           |            |
| 1629 |   | A     | RESISTOR      |     | R6001   | 1-216-842-11 | METAL CHIP 56K 5% 1/10W    |           |           |            |
| 1630 |   | A     | RESISTOR      |     | R6002   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W    |           |           |            |
| 1631 |   | A     | RESISTOR      |     | R6003   | 1-260-135-11 | CARBON 1M 5% 1/2W          |           |           |            |
| 1632 |   | A     | RESISTOR      |     | R6004   | 1-218-702-11 | METAL CHIP 2.7K 0.5% 1/10W |           |           |            |
| 1633 |   | A     | RESISTOR      |     | R6005   | 1-218-708-11 | METAL CHIP 4.7K 0.5% 1/10W |           |           |            |
| 1634 |   | A     | RESISTOR      |     | R6006   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W    |           |           |            |

| No.  | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption                 | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|-----|---------|--------------|----------------------------|-----------|-----------|------------|
| 1635 |   | A     | RESISTOR |     | R6007   | 1-202-962-11 | CEMENTED 3.3 5% 10W        |           |           |            |
| 1636 |   | A     | RESISTOR |     | R6008   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 1637 |   | A     | RESISTOR |     | R6009   | 1-220-926-81 | FUSIBLE 0.47 10% 1/2W      |           |           |            |
| 1638 |   | A     | RESISTOR |     | R6010   | 1-218-668-11 | METAL CHIP 100 0.5% 1/10W  |           |           |            |
| 1639 |   | A     | RESISTOR |     | R6011   | 1-218-720-11 | METAL CHIP 15K 0.5% 1/10W  |           |           |            |
| 1640 |   | A     | RESISTOR |     | R6012   | 1-218-720-11 | METAL CHIP 15K 0.5% 1/10W  |           |           |            |
| 1641 |   | A     | RESISTOR |     | R6014   | 1-535-303-00 | LEAD, JUMPER (5.0MM)       |           |           |            |
| 1642 |   | A     | RESISTOR |     | R6015   | 1-535-303-00 | LEAD, JUMPER (5.0MM)       |           |           |            |
| 1643 |   | A     | RESISTOR |     | R6016   | 1-245-480-21 | METAL 560K 1% 1/4W         |           |           |            |
| 1644 |   | A     | RESISTOR |     | R6017   | 1-218-668-11 | METAL CHIP 100 0.5% 1/10W  |           |           |            |
| 1645 |   | A     | RESISTOR |     | R6018   | 1-249-417-11 | CARBON 1K 5% 1/4W          |           |           |            |
| 1646 |   | A     | RESISTOR |     | R6019   | 1-249-393-11 | CARBON 10 5% 1/4W          |           |           |            |
| 1647 |   | A     | RESISTOR |     | R6020   | 1-249-393-11 | CARBON 10 5% 1/4W          |           |           |            |
| 1648 |   | A     | RESISTOR |     | R6021   | 1-249-397-11 | CARBON 22 5% 1/4W          |           |           |            |
| 1649 |   | A     | RESISTOR |     | R6022   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 1650 |   | A     | RESISTOR |     | R6023   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 1651 |   | A     | RESISTOR |     | R6024   | 1-249-397-11 | CARBON 22 5% 1/4W          |           |           |            |
| 1652 |   | A     | RESISTOR |     | R6025   | 1-218-642-11 | METAL OXIDE 100K 5% 1W     |           |           |            |
| 1653 |   | A     | RESISTOR |     | R6026   | 1-216-852-11 | METAL CHIP 390K 5% 1/10W   |           |           |            |
| 1654 |   | A     | RESISTOR |     | R6027   | 1-249-397-11 | CARBON 22 5% 1/4W          |           |           |            |
| 1655 |   | A     | RESISTOR |     | R6028   | 1-243-979-71 | METAL OXIDE 0.1 5% 2W      |           |           |            |
| 1656 |   | A     | RESISTOR |     | R6029   | 1-249-393-11 | CARBON 10 5% 1/4W          |           |           |            |
| 1657 |   | A     | RESISTOR |     | R6030   | 1-216-835-11 | METAL CHIP 15K 5% 1/10W    |           |           |            |
| 1658 |   | A     | RESISTOR |     | R6031   | 1-216-817-11 | METAL CHIP 470 5% 1/10W    |           |           |            |
| 1659 |   | A     | RESISTOR |     | R6032   | 1-247-289-00 | CARBON 8.2M 5% 1W          |           |           |            |
| 1660 |   | A     | RESISTOR |     | R6033   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 1661 |   | A     | RESISTOR |     | R6034   | 1-249-417-11 | CARBON 1K 5% 1/4W          |           |           |            |
| 1662 |   | A     | RESISTOR |     | R6035   | 1-218-724-11 | METAL CHIP 22K 0.5% 1/10W  |           |           |            |
| 1663 |   | A     | RESISTOR |     | R6037   | 1-216-805-11 | METAL CHIP 47 5% 1/10W     |           |           |            |
| 1664 |   | A     | RESISTOR |     | R6038   | 1-216-041-00 | RES-CHIP 470 5% 1/10W      |           |           |            |
| 1665 |   | A     | RESISTOR |     | R6039   | 1-216-845-11 | METAL CHIP 100K 5% 1/10W   |           |           |            |
| 1666 |   | A     | RESISTOR |     | R6040   | 1-218-724-11 | METAL CHIP 22K 0.5% 1/10W  |           |           |            |
| 1667 |   | A     | RESISTOR |     | R6041   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W   |           |           |            |
| 1668 |   | A     | RESISTOR |     | R6043   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 1669 |   | A     | RESISTOR |     | R6045   | 1-216-845-11 | METAL CHIP 100K 5% 1/10W   |           |           |            |
| 1670 |   | A     | RESISTOR |     | R6048   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 1671 |   | A     | RESISTOR |     | R6049   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 1672 |   | A     | RESISTOR |     | R6050   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 1673 |   | A     | RESISTOR |     | R6051   | 1-218-708-11 | METAL CHIP 4.7K 0.5% 1/10W |           |           |            |
| 1674 |   | A     | RESISTOR |     | R6052   | 1-218-712-11 | METAL CHIP 6.8K 0.5% 1/10W |           |           |            |
| 1675 |   | A     | RESISTOR |     | R6053   | 1-249-405-11 | CARBON 100 5% 1/4W         |           |           |            |
| 1676 |   | A     | RESISTOR |     | R6054   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 1677 |   | A     | RESISTOR |     | R6055   | 1-249-405-11 | CARBON 100 5% 1/4W         |           |           |            |

| No.  | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption               | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|-----|---------|--------------|--------------------------|-----------|-----------|------------|
| 1678 |   | A     | RESISTOR |     | R6056   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 1679 |   | A     | RESISTOR |     | R6057   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 1680 |   | A     | RESISTOR |     | R6058   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 1681 |   | A     | RESISTOR |     | R6059   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W  |           |           |            |
| 1682 |   | A     | RESISTOR |     | R6060   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W  |           |           |            |
| 1683 |   | A     | RESISTOR |     | R6061   | 1-216-857-11 | METAL CHIP 1M 5% 1/10W   |           |           |            |
| 1684 |   | A     | RESISTOR |     | R6062   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 1685 |   | A     | RESISTOR |     | R6063   | 1-249-393-11 | CARBON 10 5% 1/4W        |           |           |            |
| 1686 |   | A     | RESISTOR |     | R6064   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 1687 |   | A     | RESISTOR |     | R6065   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 1688 |   | A     | RESISTOR |     | R6068   | 1-216-857-11 | METAL CHIP 1M 5% 1/10W   |           |           |            |
| 1689 |   | A     | RESISTOR |     | R6074   | 1-260-131-11 | CARBON 470K 5% 1/2W      |           |           |            |
| 1690 |   | A     | RESISTOR |     | R6075   | 1-260-131-11 | CARBON 470K 5% 1/2W      |           |           |            |
| 1691 |   | A     | RESISTOR |     | R6081   | 1-245-477-21 | METAL 430K 1% 1/4W       |           |           |            |
| 1692 |   | A     | RESISTOR |     | R6107   | 1-216-845-11 | METAL CHIP 100K 5% 1/10W |           |           |            |
| 1693 |   | A     | RESISTOR |     | R6108   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 1694 |   | A     | RESISTOR |     | R6109   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 1695 |   | A     | RESISTOR |     | R6200   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W |           |           |            |
| 1696 |   | A     | RESISTOR |     | R6201   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 1697 |   | A     | RESISTOR |     | R6202   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 1698 |   | A     | RESISTOR |     | R6204   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 1699 |   | A     | RESISTOR |     | R6205   | 1-216-839-11 | METAL CHIP 33K 5% 1/10W  |           |           |            |
| 1700 |   | A     | RESISTOR |     | R6206   | 1-216-837-11 | METAL CHIP 22K 5% 1/10W  |           |           |            |
| 1701 |   | A     | RESISTOR |     | R6207   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W |           |           |            |
| 1702 |   | A     | RESISTOR |     | R6208   | 1-216-847-11 | METAL CHIP 150K 5% 1/10W |           |           |            |
| 1703 |   | A     | RESISTOR |     | R6209   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 1704 |   | A     | RESISTOR |     | R6210   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W |           |           |            |
| 1705 |   | A     | RESISTOR |     | R6211   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 1706 |   | A     | RESISTOR |     | R6212   | 1-216-857-11 | METAL CHIP 1M 5% 1/10W   |           |           |            |
| 1707 |   | A     | RESISTOR |     | R6213   | 1-216-847-11 | METAL CHIP 150K 5% 1/10W |           |           |            |
| 1708 |   | A     | RESISTOR |     | R6214   | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W |           |           |            |
| 1709 |   | A     | RESISTOR |     | R6215   | 1-216-813-11 | METAL CHIP 220 5% 1/10W  |           |           |            |
| 1710 |   | A     | RESISTOR |     | R6216   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W |           |           |            |
| 1711 |   | A     | RESISTOR |     | R6217   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 1712 |   | A     | RESISTOR |     | R6218   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 1713 |   | A     | RESISTOR |     | R6219   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 1714 |   | A     | RESISTOR |     | R6221   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 1715 |   | A     | RESISTOR |     | R6222   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W |           |           |            |
| 1716 |   | A     | RESISTOR |     | R6223   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 1717 |   | A     | RESISTOR |     | R6224   | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W |           |           |            |
| 1718 |   | A     | RESISTOR |     | R6225   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 1719 |   | A     | RESISTOR |     | R6226   | 1-216-847-11 | METAL CHIP 150K 5% 1/10W |           |           |            |
| 1720 |   | A     | RESISTOR |     | R6227   | 1-216-837-11 | METAL CHIP 22K 5% 1/10W  |           |           |            |



| No.  | # | Board | Type        | △/* | Ref.No. | Part No.     | Descrption                     | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-------------|-----|---------|--------------|--------------------------------|-----------|-----------|------------|
| 1721 |   | A     | RESISTOR    |     | R6228   | 1-216-839-11 | METAL CHIP 33K 5% 1/10W        |           |           |            |
| 1722 |   | A     | RESISTOR    |     | R6229   | 1-216-857-11 | METAL CHIP 1M 5% 1/10W         |           |           |            |
| 1723 |   | A     | RESISTOR    |     | R6230   | 1-216-847-11 | METAL CHIP 150K 5% 1/10W       |           |           |            |
| 1724 |   | A     | RESISTOR    |     | R6231   | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W       |           |           |            |
| 1725 |   | A     | RESISTOR    |     | R6232   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 1726 |   | A     | RESISTOR    |     | R6233   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W         |           |           |            |
| 1727 |   | A     | RESISTOR    |     | R6234   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 1728 |   | A     | RESISTOR    |     | R6235   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W       |           |           |            |
| 1729 |   | A     | RESISTOR    |     | R6236   | 1-216-809-11 | METAL CHIP 100 5% 1/10W        |           |           |            |
| 1730 |   | A     | RESISTOR    |     | R6237   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W        |           |           |            |
| 1731 |   | A     | RESISTOR    |     | R6238   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W        |           |           |            |
| 1732 |   | A     | RESISTOR    |     | R6239   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 1733 |   | A     | RESISTOR    |     | R6240   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W        |           |           |            |
| 1734 |   | A     | RESISTOR    |     | R6241   | 1-216-809-11 | METAL CHIP 100 5% 1/10W        |           |           |            |
| 1735 |   | A     | RESISTOR    |     | R6242   | 1-216-809-11 | METAL CHIP 100 5% 1/10W        |           |           |            |
| 1736 |   | A     | RESISTOR    |     | R6243   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W        |           |           |            |
| 1737 |   | A     | RESISTOR    |     | R6245   | 1-216-805-11 | METAL CHIP 47 5% 1/10W         |           |           |            |
| 1738 |   | A     | RESISTOR    |     | R6246   | 1-216-805-11 | METAL CHIP 47 5% 1/10W         |           |           |            |
| 1739 |   | A     | RESISTOR    |     | R6247   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W        |           |           |            |
| 1740 |   | A     | RESISTOR    |     | R6248   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W        |           |           |            |
| 1741 |   | A     | RESISTOR    |     | R6249   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W        |           |           |            |
| 1742 |   | A     | RESISTOR    |     | R6250   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W        |           |           |            |
| 1743 |   | A     | RESISTOR    |     | R6251   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W       |           |           |            |
| 1744 |   | A     | RESISTOR    |     | R6252   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 1745 |   | A     | RESISTOR    |     | R6253   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 1746 |   | A     | RELAY       |     | RY6001  | 1-755-407-11 | RELAY (AC POWER)               |           |           |            |
| 1747 |   | A     | TRANSFORMER |     | T6001   | 1-431-419-21 | TRANSFORMER, LINE FILTER       |           |           |            |
| 1748 |   | A     | TRANSFORMER |     | T6002   | 1-437-972-11 | DC-DC CONVERTER TRANSFORMER    |           |           |            |
| 1749 |   | A     | TRANSFORMER |     | T6003   | 1-437-975-11 | TRANSFORMER, STAND-BY          |           |           |            |
| 1750 |   | A     | THERMISTOR  |     | TH6001  | 1-803-586-41 | THERMISTOR                     |           |           |            |
| 1751 |   | A     | TUNER       |     | TU6200  | 8-598-594-10 | TUNER, FSS BTF-FA421           |           |           |            |
| 1752 |   | A     | TUNER       |     | TU6201  | 8-598-593-20 | TUNER, FSS BTF-WA421           |           |           |            |
| 1753 |   | A     | VARISTOR    |     | VD6001  | 1-803-585-11 | VARISTOR ENE271D-10A           |           |           |            |
| 1754 |   | A     | VARISTOR    |     | VD6002  | 1-803-585-11 | VARISTOR ENE271D-10A           |           |           |            |
| 1755 |   | M     | CAPACITOR   |     | C4805   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 1756 |   | M     | CAPACITOR   |     | C4806   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 1757 |   | M     | CAPACITOR   |     | C4807   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 1758 |   | M     | CAPACITOR   |     | C4808   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V  |           |           |            |
| 1759 |   | M     | CAPACITOR   |     | C4809   | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V    |           |           |            |
| 1760 |   | M     | CAPACITOR   |     | C4810   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V  |           |           |            |
| 1761 |   | M     | CAPACITOR   |     | C4811   | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V    |           |           |            |
| 1762 |   | M     | CAPACITOR   |     | C4812   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V  |           |           |            |
| 1763 |   | M     | CAPACITOR   |     | C4813   | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V    |           |           |            |

| No.  | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                       | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-----|---------|--------------|----------------------------------|-----------|-----------|------------|
| 1764 |   | M     | CAPACITOR |     | C4816   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1765 |   | M     | CAPACITOR |     | C4817   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1766 |   | M     | CAPACITOR |     | C4900   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V           |           |           |            |
| 1767 |   | M     | CAPACITOR |     | C4901   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V           |           |           |            |
| 1768 |   | M     | CAPACITOR |     | C4902   | 1-126-204-11 | ELECT CHIP 47UF 20.00% 16V       |           |           |            |
| 1769 |   | M     | CAPACITOR |     | C4903   | 1-126-204-11 | ELECT CHIP 47UF 20.00% 16V       |           |           |            |
| 1770 |   | M     | CAPACITOR |     | C4904   | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 1771 |   | M     | CAPACITOR |     | C4905   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1772 |   | M     | CAPACITOR |     | C4906   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1773 |   | M     | CAPACITOR |     | C4907   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1774 |   | M     | CAPACITOR |     | C4908   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1775 |   | M     | CAPACITOR |     | C4909   | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 1776 |   | M     | CAPACITOR |     | C4910   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 1777 |   | M     | CAPACITOR |     | C4911   | 1-128-416-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 1778 |   | M     | CAPACITOR |     | C4912   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1779 |   | M     | CAPACITOR |     | C4913   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1780 |   | M     | CAPACITOR |     | C4914   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1781 |   | M     | CAPACITOR |     | C4915   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V           |           |           |            |
| 1782 |   | M     | CAPACITOR |     | C4916   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1783 |   | M     | CAPACITOR |     | C4917   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1784 |   | M     | CAPACITOR |     | C4918   | 1-126-204-11 | ELECT CHIP 47UF 20.00% 16V       |           |           |            |
| 1785 |   | M     | CAPACITOR |     | C4919   | 1-126-204-11 | ELECT CHIP 47UF 20.00% 16V       |           |           |            |
| 1786 |   | M     | CAPACITOR |     | C4920   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1787 |   | M     | CAPACITOR |     | C4921   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1788 |   | M     | CAPACITOR |     | C4922   | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 1789 |   | M     | CAPACITOR |     | C4923   | 1-126-204-11 | ELECT CHIP 47UF 20.00% 16V       |           |           |            |
| 1790 |   | M     | CAPACITOR |     | C4924   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1791 |   | M     | CAPACITOR |     | C4925   | 1-162-967-11 | CERAMIC CHIP 0.0033UF 10.00% 50V |           |           |            |
| 1792 |   | M     | CAPACITOR |     | C4926   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1793 |   | M     | CAPACITOR |     | C4927   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1794 |   | M     | CAPACITOR |     | C4928   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1795 |   | M     | CAPACITOR |     | C4929   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1796 |   | M     | CAPACITOR |     | C4930   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1797 |   | M     | CAPACITOR |     | C4931   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1798 |   | M     | CAPACITOR |     | C4932   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1799 |   | M     | CAPACITOR |     | C4933   | 1-164-360-11 | CERAMIC CHIP 0.1UF 16V           |           |           |            |
| 1800 |   | M     | CAPACITOR |     | C4934   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1801 |   | M     | CAPACITOR |     | C4935   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1802 |   | M     | CAPACITOR |     | C4936   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1803 |   | M     | CAPACITOR |     | C4937   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1804 |   | M     | CAPACITOR |     | C4938   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1805 |   | M     | CAPACITOR |     | C4939   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1806 |   | M     | CAPACITOR |     | C4940   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |

| No.  | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                      | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-----|---------|--------------|---------------------------------|-----------|-----------|------------|
| 1807 |   | M     | CAPACITOR |     | C4941   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1808 |   | M     | CAPACITOR |     | C4942   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1809 |   | M     | CAPACITOR |     | C4943   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1810 |   | M     | CAPACITOR |     | C4944   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1811 |   | M     | CAPACITOR |     | C4945   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1812 |   | M     | CAPACITOR |     | C4946   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1813 |   | M     | CAPACITOR |     | C4947   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1814 |   | M     | CAPACITOR |     | C4948   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1815 |   | M     | CAPACITOR |     | C4949   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1816 |   | M     | CAPACITOR |     | C4950   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1817 |   | M     | CAPACITOR |     | C4951   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1818 |   | M     | CAPACITOR |     | C4952   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V      |           |           |            |
| 1819 |   | M     | CAPACITOR |     | C4953   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1820 |   | M     | CAPACITOR |     | C4954   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1821 |   | M     | CAPACITOR |     | C4955   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1822 |   | M     | CAPACITOR |     | C4956   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V      |           |           |            |
| 1823 |   | M     | CAPACITOR |     | C4958   | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |
| 1824 |   | M     | CAPACITOR |     | C4959   | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |
| 1825 |   | M     | CAPACITOR |     | C4960   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 1826 |   | M     | CAPACITOR |     | C5001   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V      |           |           |            |
| 1827 |   | M     | CAPACITOR |     | C5002   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V      |           |           |            |
| 1828 |   | M     | CAPACITOR |     | C5003   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V     |           |           |            |
| 1829 |   | M     | CAPACITOR |     | C5004   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V     |           |           |            |
| 1830 |   | M     | CAPACITOR |     | C5005   | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V    |           |           |            |
| 1831 |   | M     | CAPACITOR |     | C5006   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V     |           |           |            |
| 1832 |   | M     | CAPACITOR |     | C5007   | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V    |           |           |            |
| 1833 |   | M     | CAPACITOR |     | C5008   | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V    |           |           |            |
| 1834 |   | M     | CAPACITOR |     | C5009   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 1835 |   | M     | CAPACITOR |     | C5010   | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V    |           |           |            |
| 1836 |   | M     | CAPACITOR |     | C5011   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V      |           |           |            |
| 1837 |   | M     | CAPACITOR |     | C5012   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V      |           |           |            |
| 1838 |   | M     | CAPACITOR |     | C5013   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 1839 |   | M     | CAPACITOR |     | C5014   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V      |           |           |            |
| 1840 |   | M     | CAPACITOR |     | C5015   | 1-126-206-11 | ELECT CHIP 100UF 20.00% 6.3V    |           |           |            |
| 1841 |   | M     | CAPACITOR |     | C5016   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V      |           |           |            |
| 1842 |   | M     | CAPACITOR |     | C5017   | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V     |           |           |            |
| 1843 |   | M     | CAPACITOR |     | C5018   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1844 |   | M     | CAPACITOR |     | C5019   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 1845 |   | M     | CAPACITOR |     | C5020   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V      |           |           |            |
| 1846 |   | M     | CAPACITOR |     | C5021   | 1-164-392-11 | CERAMIC CHIP 390PF 5.00% 50V    |           |           |            |
| 1847 |   | M     | CAPACITOR |     | C5023   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1848 |   | M     | CAPACITOR |     | C5024   | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V     |           |           |            |
| 1849 |   | M     | CAPACITOR |     | C5025   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |

| No.  | # | Board | Type      | △ /* | Ref.No. | Part No.     | Descrption                      | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|------|---------|--------------|---------------------------------|-----------|-----------|------------|
| 1850 |   | M     | CAPACITOR |      | C5026   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1851 |   | M     | CAPACITOR |      | C5027   | 1-162-921-11 | CERAMIC CHIP 33PF 5.00% 50V     |           |           |            |
| 1852 |   | M     | CAPACITOR |      | C5028   | 1-162-921-11 | CERAMIC CHIP 33PF 5.00% 50V     |           |           |            |
| 1853 |   | M     | CAPACITOR |      | C5029   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V     |           |           |            |
| 1854 |   | M     | CAPACITOR |      | C5030   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1855 |   | M     | CAPACITOR |      | C5031   | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V  |           |           |            |
| 1856 |   | M     | CAPACITOR |      | C5032   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 1857 |   | M     | CAPACITOR |      | C5033   | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V     |           |           |            |
| 1858 |   | M     | CAPACITOR |      | C5034   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 1859 |   | M     | CAPACITOR |      | C5035   | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V     |           |           |            |
| 1860 |   | M     | CAPACITOR |      | C5036   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V      |           |           |            |
| 1861 |   | M     | CAPACITOR |      | C5037   | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V    |           |           |            |
| 1862 |   | M     | CAPACITOR |      | C5038   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V      |           |           |            |
| 1863 |   | M     | CAPACITOR |      | C5039   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1864 |   | M     | CAPACITOR |      | C5040   | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V    |           |           |            |
| 1865 |   | M     | CAPACITOR |      | C5101   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 1866 |   | M     | CAPACITOR |      | C5102   | 1-126-205-11 | ELECT CHIP 47UF 20.00% 6.3V     |           |           |            |
| 1867 |   | M     | CAPACITOR |      | C5103   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1868 |   | M     | CAPACITOR |      | C5104   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 1869 |   | M     | CAPACITOR |      | C5105   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 1870 |   | M     | CAPACITOR |      | C5108   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 1871 |   | M     | CAPACITOR |      | C5109   | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |
| 1872 |   | M     | CAPACITOR |      | C5110   | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |
| 1873 |   | M     | CAPACITOR |      | C5113   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 1874 |   | M     | CAPACITOR |      | C5116   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 1875 |   | M     | CAPACITOR |      | C5151   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 1876 |   | M     | CAPACITOR |      | C5152   | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V |           |           |            |
| 1877 |   | M     | CAPACITOR |      | C5200   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 1878 |   | M     | CAPACITOR |      | C5201   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V      |           |           |            |
| 1879 |   | M     | CAPACITOR |      | C5202   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 1880 |   | M     | CAPACITOR |      | C5204   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 1881 |   | M     | CAPACITOR |      | C5205   | 1-104-607-11 | ELECT CHIP 47UF 20.00% 16V      |           |           |            |
| 1882 |   | M     | CAPACITOR |      | C5207   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V   |           |           |            |
| 1883 |   | M     | CAPACITOR |      | C5208   | 1-162-974-11 | CERAMIC CHIP 0.01UF 50V         |           |           |            |
| 1884 |   | M     | CAPACITOR |      | C5210   | 1-126-204-11 | ELECT CHIP 47UF 20.00% 16V      |           |           |            |
| 1885 |   | M     | CAPACITOR |      | C5211   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V          |           |           |            |
| 1886 |   | M     | CAPACITOR |      | C5212   | 1-126-395-11 | ELECT CHIP 22UF 20.00% 16V      |           |           |            |
| 1887 |   | M     | CAPACITOR |      | C5213   | 1-162-974-11 | CERAMIC CHIP 0.01UF 50V         |           |           |            |
| 1888 |   | M     | CAPACITOR |      | C5214   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V      |           |           |            |
| 1889 |   | M     | CAPACITOR |      | C5215   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V          |           |           |            |
| 1890 |   | M     | CAPACITOR |      | C5217   | 1-126-395-11 | ELECT CHIP 22UF 20.00% 16V      |           |           |            |
| 1891 |   | M     | CAPACITOR |      | C5218   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 1892 |   | M     | CAPACITOR |      | C5219   | 1-162-974-11 | CERAMIC CHIP 0.01UF 50V         |           |           |            |

| No.  | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                       | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-----|---------|--------------|----------------------------------|-----------|-----------|------------|
| 1893 |   | M     | CAPACITOR |     | C5222   | 1-162-919-11 | CERAMIC CHIP 22PF 5.00% 50V      |           |           |            |
| 1894 |   | M     | CAPACITOR |     | C5223   | 1-162-919-11 | CERAMIC CHIP 22PF 5.00% 50V      |           |           |            |
| 1895 |   | M     | CAPACITOR |     | C5224   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1896 |   | M     | CAPACITOR |     | C5225   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1897 |   | M     | CAPACITOR |     | C5226   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1898 |   | M     | CAPACITOR |     | C5227   | 1-162-974-11 | CERAMIC CHIP 0.01UF 50V          |           |           |            |
| 1899 |   | M     | CAPACITOR |     | C5228   | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 1900 |   | M     | CAPACITOR |     | C5229   | 1-162-974-11 | CERAMIC CHIP 0.01UF 50V          |           |           |            |
| 1901 |   | M     | CAPACITOR |     | C5230   | 1-115-156-11 | CERAMIC CHIP 1UF 10V             |           |           |            |
| 1902 |   | M     | CAPACITOR |     | C5231   | 1-126-206-11 | ELECT CHIP 100UF 20.00% 6.3V     |           |           |            |
| 1903 |   | M     | CAPACITOR |     | C5234   | 1-126-204-11 | ELECT CHIP 47UF 20.00% 16V       |           |           |            |
| 1904 |   | M     | CAPACITOR |     | C5235   | 1-162-964-11 | CERAMIC CHIP 0.001UF 10.00% 50V  |           |           |            |
| 1905 |   | M     | CAPACITOR |     | C5236   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1906 |   | M     | CAPACITOR |     | C5237   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1907 |   | M     | CAPACITOR |     | C5238   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1908 |   | M     | CAPACITOR |     | C5239   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 1909 |   | M     | CAPACITOR |     | C5240   | 1-162-967-11 | CERAMIC CHIP 0.0033UF 10.00% 50V |           |           |            |
| 1910 |   | M     | CAPACITOR |     | C5301   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 1911 |   | M     | CONNECTOR |     | CN4801  | 1-817-120-11 | CONNECTOR, DVI-D                 |           |           |            |
| 1912 |   | M     | CONNECTOR | *   | CN4900  | 1-785-427-11 | CONNECTOR, BOARD TO WIRE 20P     |           |           |            |
| 1913 |   | M     | CONNECTOR |     | CN5100  | 1-817-112-11 | HALF PITCH CONNECTOR (26PIN)     |           |           |            |
| 1914 |   | M     | CONNECTOR | *   | CN5201  | 1-764-333-11 | PLUG, CONNECTOR (V) 10P          |           |           |            |
| 1915 |   | M     | CONNECTOR | *   | CN5202  | 1-764-007-11 | PIN, CONNECTOR (SMD) 12P         |           |           |            |
| 1916 |   | M     | CONNECTOR |     | CN5210  | 1-766-360-21 | CONNECTOR, FFC/FPC 30P           |           |           |            |
| 1917 |   | M     | CONNECTOR |     | CN5230  | 1-770-105-21 | CONNECTOR, FFC/FPC 40P           |           |           |            |
| 1918 |   | M     | CONNECTOR |     | CN5238  | 1-770-701-11 | CONNECTOR, FFC/FPC 18P           |           |           |            |
| 1919 |   | M     | DIODE     |     | D4801   | 8-719-069-55 | DIODE UDZSTE-175.6B              |           |           |            |
| 1920 |   | M     | DIODE     |     | D4802   | 8-719-069-55 | DIODE UDZSTE-175.6B              |           |           |            |
| 1921 |   | M     | DIODE     |     | D4803   | 8-719-024-77 | DIODE HN1D03FU-TE85L             |           |           |            |
| 1922 |   | M     | DIODE     |     | D4804   | 8-719-024-77 | DIODE HN1D03FU-TE85L             |           |           |            |
| 1923 |   | M     | DIODE     |     | D4805   | 8-719-024-77 | DIODE HN1D03FU-TE85L             |           |           |            |
| 1924 |   | M     | DIODE     |     | D4806   | 8-719-024-77 | DIODE HN1D03FU-TE85L             |           |           |            |
| 1925 |   | M     | DIODE     |     | D4807   | 8-719-024-77 | DIODE HN1D03FU-TE85L             |           |           |            |
| 1926 |   | M     | DIODE     |     | D4808   | 8-719-941-86 | DIODE DAN202U                    |           |           |            |
| 1927 |   | M     | DIODE     |     | D4900   | 8-719-050-37 | DIODE M1MA152WA-T1               |           |           |            |
| 1928 |   | M     | DIODE     |     | D4901   | 8-719-050-38 | DIODE M1MA152WK-T1               |           |           |            |
| 1929 |   | M     | DIODE     |     | D5001   | 8-719-404-50 | DIODE MA111-TX                   |           |           |            |
| 1930 |   | M     | DIODE     |     | D5100   | 8-719-069-55 | DIODE UDZSTE-175.6B              |           |           |            |
| 1931 |   | M     | DIODE     |     | D5102   | 8-719-069-55 | DIODE UDZSTE-175.6B              |           |           |            |
| 1932 |   | M     | DIODE     |     | D5103   | 8-719-404-50 | DIODE MA111-TX                   |           |           |            |
| 1933 |   | M     | DIODE     |     | D5105   | 8-719-069-55 | DIODE UDZSTE-175.6B              |           |           |            |
| 1934 |   | M     | DIODE     |     | D5106   | 8-719-069-55 | DIODE UDZSTE-175.6B              |           |           |            |
| 1935 |   | M     | DIODE     |     | D5107   | 8-719-024-77 | DIODE HN1D03FU-TE85L             |           |           |            |

| No.  | # | Board | Type    | △ /* | Ref.No. | Part No.     | Descrption           | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|---------|------|---------|--------------|----------------------|-----------|-----------|------------|
| 1936 |   | M     | DIODE   |      | D5108   | 8-719-024-77 | DIODE HN1D03FU-TE85L |           |           |            |
| 1937 |   | M     | DIODE   |      | D5109   | 8-719-024-77 | DIODE HN1D03FU-TE85L |           |           |            |
| 1938 |   | M     | DIODE   |      | D5110   | 8-719-024-77 | DIODE HN1D03FU-TE85L |           |           |            |
| 1939 |   | M     | DIODE   |      | D5111   | 8-719-941-86 | DIODE DAN202U        |           |           |            |
| 1940 |   | M     | DIODE   |      | D5121   | 8-719-404-50 | DIODE MA111-TX       |           |           |            |
| 1941 |   | M     | DIODE   |      | D5122   | 8-719-404-50 | DIODE MA111-TX       |           |           |            |
| 1942 |   | M     | DIODE   |      | D5151   | 8-719-404-50 | DIODE MA111-TX       |           |           |            |
| 1943 |   | M     | DIODE   |      | D5200   | 8-719-914-43 | DIODE DAN202K        |           |           |            |
| 1944 |   | M     | DIODE   |      | D5201   | 8-719-914-44 | DIODE DAP202K        |           |           |            |
| 1945 |   | M     | DIODE   |      | D5202   | 8-719-404-50 | DIODE MA111-TX       |           |           |            |
| 1946 |   | M     | DIODE   |      | D5204   | 8-719-404-50 | DIODE MA111-TX       |           |           |            |
| 1947 |   | M     | DIODE   |      | D5205   | 8-719-914-43 | DIODE DAN202K        |           |           |            |
| 1948 |   | M     | DIODE   |      | D5206   | 8-719-914-44 | DIODE DAP202K        |           |           |            |
| 1949 |   | M     | DIODE   |      | D5208   | 8-719-404-50 | DIODE MA111-TX       |           |           |            |
| 1950 |   | M     | DIODE   |      | D5209   | 8-719-914-43 | DIODE DAN202K        |           |           |            |
| 1951 |   | M     | DIODE   |      | D5210   | 8-719-404-50 | DIODE MA111-TX       |           |           |            |
| 1952 |   | M     | DIODE   |      | D5211   | 8-719-914-43 | DIODE DAN202K        |           |           |            |
| 1953 |   | M     | DIODE   |      | D5212   | 8-719-914-43 | DIODE DAN202K        |           |           |            |
| 1954 |   | M     | DIODE   |      | D5213   | 8-719-914-43 | DIODE DAN202K        |           |           |            |
| 1955 |   | M     | DIODE   |      | D5214   | 8-719-914-43 | DIODE DAN202K        |           |           |            |
| 1956 |   | M     | FERRITE |      | FB4802  | 1-414-445-11 | FERRITE 0UH          |           |           |            |
| 1957 |   | M     | FERRITE |      | FB4803  | 1-414-445-11 | FERRITE 0UH          |           |           |            |
| 1958 |   | M     | FERRITE |      | FB4804  | 1-414-445-11 | FERRITE 0UH          |           |           |            |
| 1959 |   | M     | FERRITE |      | FB4805  | 1-414-229-11 | FERRITE 0UH          |           |           |            |
| 1960 |   | M     | FERRITE |      | FB4806  | 1-414-229-11 | FERRITE 0UH          |           |           |            |
| 1961 |   | M     | FERRITE |      | FB4807  | 1-414-229-11 | FERRITE 0UH          |           |           |            |
| 1962 |   | M     | FERRITE |      | FB4808  | 1-414-229-11 | FERRITE 0UH          |           |           |            |
| 1963 |   | M     | FERRITE |      | FB4809  | 1-414-229-11 | FERRITE 0UH          |           |           |            |
| 1964 |   | M     | FERRITE |      | FB4810  | 1-414-229-11 | FERRITE 0UH          |           |           |            |
| 1965 |   | M     | FERRITE |      | FB4901  | 1-414-229-11 | FERRITE 0UH          |           |           |            |
| 1966 |   | M     | FERRITE |      | FB5001  | 1-414-598-11 | FERRITE 0UH          |           |           |            |
| 1967 |   | M     | FERRITE |      | FB5002  | 1-414-598-11 | FERRITE 0UH          |           |           |            |
| 1968 |   | M     | FERRITE |      | FB5003  | 1-414-598-11 | FERRITE 0UH          |           |           |            |
| 1969 |   | M     | FERRITE |      | FB5004  | 1-414-229-11 | FERRITE 0UH          |           |           |            |
| 1970 |   | M     | FERRITE |      | FB5005  | 1-414-229-11 | FERRITE 0UH          |           |           |            |
| 1971 |   | M     | FERRITE |      | FB5006  | 1-414-598-11 | FERRITE 0UH          |           |           |            |
| 1972 |   | M     | FERRITE |      | FB5007  | 1-414-598-11 | FERRITE 0UH          |           |           |            |
| 1973 |   | M     | FERRITE |      | FB5008  | 1-414-598-11 | FERRITE 0UH          |           |           |            |
| 1974 |   | M     | FERRITE |      | FB5009  | 1-216-864-11 | SHORT CHIP 0         |           |           |            |
| 1975 |   | M     | FERRITE |      | FB5010  | 1-216-864-11 | SHORT CHIP 0         |           |           |            |
| 1976 |   | M     | FERRITE |      | FB5011  | 1-216-864-11 | SHORT CHIP 0         |           |           |            |
| 1977 |   | M     | FERRITE |      | FB5012  | 1-414-598-11 | FERRITE 0UH          |           |           |            |
| 1978 |   | M     | FERRITE |      | FB5013  | 1-414-598-11 | FERRITE 0UH          |           |           |            |

| No.  | # | Board | Type    | △ / * | Ref.No. | Part No.     | Descrption                | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|---------|-------|---------|--------------|---------------------------|-----------|-----------|------------|
| 1979 |   | M     | FERRITE |       | FB5200  | 1-414-234-22 | FERRITE 0UH               |           |           |            |
| 1980 |   | M     | FERRITE |       | FB5201  | 1-414-233-22 | FERRITE 0UH               |           |           |            |
| 1981 |   | M     | FERRITE |       | FB5202  | 1-414-228-11 | FERRITE 0UH               |           |           |            |
| 1982 |   | M     | FERRITE |       | FB5203  | 1-414-228-11 | FERRITE 0UH               |           |           |            |
| 1983 |   | M     | FERRITE |       | FB5204  | 1-239-955-11 | ARRAY, FERRITE CHIP       |           |           |            |
| 1984 |   | M     | FERRITE |       | FB5205  | 1-239-955-11 | ARRAY, FERRITE CHIP       |           |           |            |
| 1985 |   | M     | FERRITE |       | FB5207  | 1-414-228-11 | FERRITE 0UH               |           |           |            |
| 1986 |   | M     | FERRITE |       | FB5208  | 1-414-228-11 | FERRITE 0UH               |           |           |            |
| 1987 |   | M     | FERRITE |       | FB5209  | 1-414-228-11 | FERRITE 0UH               |           |           |            |
| 1988 |   | M     | FERRITE |       | FB5210  | 1-414-228-11 | FERRITE 0UH               |           |           |            |
| 1989 |   | M     | FERRITE |       | FB5211  | 1-239-955-11 | ARRAY, FERRITE CHIP       |           |           |            |
| 1990 |   | M     | FERRITE |       | FB5212  | 1-239-955-11 | ARRAY, FERRITE CHIP       |           |           |            |
| 1991 |   | M     | FERRITE |       | FB5213  | 1-414-228-11 | FERRITE 0UH               |           |           |            |
| 1992 |   | M     | FERRITE |       | FB5215  | 1-414-228-11 | FERRITE 0UH               |           |           |            |
| 1993 |   | M     | FERRITE |       | FB5216  | 1-414-228-11 | FERRITE 0UH               |           |           |            |
| 1994 |   | M     | FERRITE |       | FB5217  | 1-414-228-11 | FERRITE 0UH               |           |           |            |
| 1995 |   | M     | FERRITE |       | FB5218  | 1-414-228-11 | FERRITE 0UH               |           |           |            |
| 1996 |   | M     | FERRITE |       | FB5219  | 1-414-228-11 | FERRITE 0UH               |           |           |            |
| 1997 |   | M     | FERRITE |       | FB5220  | 1-414-228-11 | FERRITE 0UH               |           |           |            |
| 1998 |   | M     | FERRITE |       | FB5221  | 1-239-955-11 | ARRAY, FERRITE CHIP       |           |           |            |
| 1999 |   | M     | FERRITE |       | FB5222  | 1-239-955-11 | ARRAY, FERRITE CHIP       |           |           |            |
| 2000 |   | M     | FERRITE |       | FB5223  | 1-239-955-11 | ARRAY, FERRITE CHIP       |           |           |            |
| 2001 |   | M     | FERRITE |       | FB5224  | 1-239-955-11 | ARRAY, FERRITE CHIP       |           |           |            |
| 2002 |   | M     | FERRITE |       | FB5225  | 1-239-955-11 | ARRAY, FERRITE CHIP       |           |           |            |
| 2003 |   | M     | FERRITE |       | FB5227  | 1-239-955-11 | ARRAY, FERRITE CHIP       |           |           |            |
| 2004 |   | M     | FERRITE |       | FB5228  | 1-239-955-11 | ARRAY, FERRITE CHIP       |           |           |            |
| 2005 |   | M     | FERRITE |       | FB5229  | 1-239-955-11 | ARRAY, FERRITE CHIP       |           |           |            |
| 2006 |   | M     | FERRITE |       | FB5230  | 1-414-228-11 | FERRITE 0UH               |           |           |            |
| 2007 |   | M     | FILTER  |       | FL4801  | 1-234-494-21 | FILTER, EMI REMOVAL (SMD) |           |           |            |
| 2008 |   | M     | FILTER  |       | FL5001  | 1-234-177-21 | FERRITE 0UH               |           |           |            |
| 2009 |   | M     | FILTER  |       | FL5002  | 1-234-177-21 | FERRITE 0UH               |           |           |            |
| 2010 |   | M     | FILTER  |       | FL5201  | 1-234-494-21 | FILTER, EMI REMOVAL (SMD) |           |           |            |
| 2011 |   | M     | FILTER  |       | FL5202  | 1-234-494-21 | FILTER, EMI REMOVAL (SMD) |           |           |            |
| 2012 |   | M     | FILTER  |       | FL5203  | 1-234-494-21 | FILTER, EMI REMOVAL (SMD) |           |           |            |
| 2013 |   | M     | FILTER  |       | FL5204  | 1-234-494-21 | FILTER, EMI REMOVAL (SMD) |           |           |            |
| 2014 |   | M     | FILTER  |       | FL5205  | 1-234-494-21 | FILTER, EMI REMOVAL (SMD) |           |           |            |
| 2015 |   | M     | IC      |       | IC4803  | 6-703-364-01 | IC TFP510PAP              |           |           |            |
| 2016 |   | M     | IC      |       | IC4900  | 6-701-870-01 | IC THC63LVDF84B-T         |           |           |            |
| 2017 |   | M     | IC      |       | IC4901  | 6-702-982-01 | IC TC7SA00FU(Te85R)       |           |           |            |
| 2018 |   | M     | IC      |       | IC4902  | 8-759-712-65 | IC PQ070XZ01ZP            |           |           |            |
| 2019 |   | M     | IC      |       | IC4903  | 8-759-712-65 | IC PQ070XZ01ZP            |           |           |            |
| 2020 |   | M     | IC      |       | IC4904  | 6-703-365-01 | IC PST9220NL              |           |           |            |
| 2021 |   | M     | IC      |       | IC4905  | 6-702-973-01 | IC CXD9690Q               |           |           |            |

| No.  | # | Board | Type | △ / * | Ref.No. | Part No.     | Descrption            | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|------|-------|---------|--------------|-----------------------|-----------|-----------|------------|
| 2022 |   | M     | IC   |       | IC4906  | 6-702-684-01 | IC PST9225NL          |           |           |            |
| 2023 |   | M     | IC   |       | IC5001  | 8-759-641-26 | IC NJM2391DL1-33(TE1) |           |           |            |
| 2024 |   | M     | IC   |       | IC5002  | 8-759-579-68 | IC AK4524             |           |           |            |
| 2025 |   | M     | IC   |       | IC5003  | 6-702-979-01 | IC AK4114VQ-L         |           |           |            |
| 2026 |   | M     | IC   |       | IC5004  | 8-759-100-96 | IC UPC4558G2          |           |           |            |
| 2027 |   | M     | IC   |       | IC5006  | 8-759-542-87 | IC S-80827ANUP-EDQ-T2 |           |           |            |
| 2028 |   | M     | IC   |       | IC5100  | 6-700-150-01 | IC M24C04-WMN6T(A)    |           |           |            |
| 2029 |   | M     | IC   |       | IC5101  | 8-759-675-46 | IC SN65LVDS1050PWR    |           |           |            |
| 2030 |   | M     | IC   |       | IC5102  | 6-700-596-01 | IC TC74LVX4053FT(EL)  |           |           |            |
| 2031 |   | M     | IC   |       | IC5103  | 8-759-058-54 | IC TC7S00FU(TE85R)    |           |           |            |
| 2032 |   | M     | IC   |       | IC5105  | 8-759-598-39 | IC TC75W58FK(TE85R)   |           |           |            |
| 2033 |   | M     | IC   |       | IC5106  | 8-759-570-08 | IC TC7SET32FU(TE85R)  |           |           |            |
| 2034 |   | M     | IC   |       | IC5107  | 6-700-596-01 | IC TC74LVX4053FT(EL)  |           |           |            |
| 2035 |   | M     | IC   |       | IC5108  | 8-759-688-12 | IC TC74VHCT125AFT(EL) |           |           |            |
| 2036 |   | M     | IC   |       | IC5200  | 6-702-983-01 | IC TC74LCX273FT(EL)   |           |           |            |
| 2037 |   | M     | IC   |       | IC5201  | 8-759-683-99 | IC BA8274F-E2         |           |           |            |
| 2038 |   | M     | IC   |       | IC5202  | 6-700-596-01 | IC TC74LVX4053FT(EL)  |           |           |            |
| 2039 |   | M     | IC   |       | IC5204  | 8-759-592-43 | IC TC7SZ02FU(TE85R)   |           |           |            |
| 2040 |   | M     | IC   |       | IC5205  | 8-759-475-39 | IC TC74LCX74FT(EL)    |           |           |            |
| 2041 |   | M     | IC   |       | IC5206  | 8-759-585-48 | IC HD74LV4066ATEL     |           |           |            |
| 2042 |   | M     | IC   |       | IC5207  | 6-801-402-01 | IC BD4729GTR          |           |           |            |
| 2043 |   | M     | IC   |       | IC5208  | 6-702-688-01 | IC M24C64-WMN6T(B)    |           |           |            |
| 2044 |   | M     | IC   |       | IC5209  | 8-759-641-26 | IC NJM2391DL1-33(TE1) |           |           |            |
| 2045 |   | M     | IC   |       | IC5210  | 6-802-508-01 | IC M306VSMG-507FP     |           |           |            |
| 2046 |   | M     | IC   |       | IC5211  | 8-759-544-01 | IC S-80828ANNP-EDR-T2 |           |           |            |
| 2047 |   | M     | COIL |       | L4900   | 1-412-029-11 | INDUCTOR 10UH         |           |           |            |
| 2048 |   | M     | COIL |       | L4901   | 1-412-029-11 | INDUCTOR 10UH         |           |           |            |
| 2049 |   | M     | COIL |       | L4902   | 1-412-029-11 | INDUCTOR 10UH         |           |           |            |
| 2050 |   | M     | COIL |       | L4903   | 1-412-030-11 | INDUCTOR 22UH         |           |           |            |
| 2051 |   | M     | COIL |       | L4904   | 1-412-029-11 | INDUCTOR 10UH         |           |           |            |
| 2052 |   | M     | COIL |       | L4905   | 1-412-029-11 | INDUCTOR 10UH         |           |           |            |
| 2053 |   | M     | COIL |       | L4906   | 1-412-029-11 | INDUCTOR 10UH         |           |           |            |
| 2054 |   | M     | COIL |       | L4907   | 1-412-029-11 | INDUCTOR 10UH         |           |           |            |
| 2055 |   | M     | COIL |       | L4908   | 1-412-029-11 | INDUCTOR 10UH         |           |           |            |
| 2056 |   | M     | COIL |       | L4909   | 1-412-029-11 | INDUCTOR 10UH         |           |           |            |
| 2057 |   | M     | COIL |       | L4910   | 1-412-029-11 | INDUCTOR 10UH         |           |           |            |
| 2058 |   | M     | COIL |       | L4911   | 1-412-030-11 | INDUCTOR 22UH         |           |           |            |
| 2059 |   | M     | COIL |       | L5001   | 1-412-029-11 | INDUCTOR 10UH         |           |           |            |
| 2060 |   | M     | COIL |       | L5003   | 1-412-029-11 | INDUCTOR 10UH         |           |           |            |
| 2061 |   | M     | COIL |       | L5004   | 1-412-029-11 | INDUCTOR 10UH         |           |           |            |
| 2062 |   | M     | COIL |       | L5100   | 1-419-370-21 | INDUCTOR 0UH          |           |           |            |
| 2063 |   | M     | COIL |       | L5101   | 1-419-370-21 | INDUCTOR 0UH          |           |           |            |
| 2064 |   | M     | COIL |       | L5102   | 1-419-370-21 | INDUCTOR 0UH          |           |           |            |



| No.  | # | Board | Type       | △/* | Ref.No. | Part No.     | Descrption                  | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|------------|-----|---------|--------------|-----------------------------|-----------|-----------|------------|
| 2065 |   | M     | COIL       |     | L5103   | 1-419-370-21 | INDUCTOR 0UH                |           |           |            |
| 2066 |   | M     | COIL       |     | L5200   | 1-412-026-11 | INDUCTOR 1UH                |           |           |            |
| 2067 |   | M     | COIL       |     | L5201   | 1-412-029-11 | INDUCTOR 10UH               |           |           |            |
| 2068 |   | M     | COIL       |     | L5202   | 1-412-029-11 | INDUCTOR 10UH               |           |           |            |
| 2069 |   | M     | TRANSISTOR |     | Q4803   | 6-550-014-01 | TRANSISTOR SSM6N15FU(TE85R) |           |           |            |
| 2070 |   | M     | TRANSISTOR |     | Q4804   | 6-550-014-01 | TRANSISTOR SSM6N15FU(TE85R) |           |           |            |
| 2071 |   | M     | TRANSISTOR |     | Q4805   | 6-550-014-01 | TRANSISTOR SSM6N15FU(TE85R) |           |           |            |
| 2072 |   | M     | TRANSISTOR |     | Q4900   | 8-729-028-28 | TRANSISTOR 2SK2036(TE85L)   |           |           |            |
| 2073 |   | M     | TRANSISTOR |     | Q4901   | 8-729-028-28 | TRANSISTOR 2SK2036(TE85L)   |           |           |            |
| 2074 |   | M     | TRANSISTOR |     | Q5001   | 8-729-928-90 | TRANSISTOR DTC114EE         |           |           |            |
| 2075 |   | M     | TRANSISTOR |     | Q5002   | 8-729-928-90 | TRANSISTOR DTC114EE         |           |           |            |
| 2076 |   | M     | TRANSISTOR |     | Q5003   | 8-729-928-90 | TRANSISTOR DTC114EE         |           |           |            |
| 2077 |   | M     | TRANSISTOR |     | Q5100   | 8-729-900-53 | TRANSISTOR DTC114EK         |           |           |            |
| 2078 |   | M     | TRANSISTOR |     | Q5200   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX     |           |           |            |
| 2079 |   | M     | TRANSISTOR |     | Q5203   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX     |           |           |            |
| 2080 |   | M     | TRANSISTOR |     | Q5204   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX     |           |           |            |
| 2081 |   | M     | TRANSISTOR |     | Q5205   | 8-729-216-22 | TRANSISTOR 2SA1162-G        |           |           |            |
| 2082 |   | M     | TRANSISTOR |     | Q5206   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX     |           |           |            |
| 2083 |   | M     | TRANSISTOR |     | Q5207   | 8-729-216-22 | TRANSISTOR 2SA1162-G        |           |           |            |
| 2084 |   | M     | TRANSISTOR |     | Q5208   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX     |           |           |            |
| 2085 |   | M     | TRANSISTOR |     | Q5209   | 8-729-216-22 | TRANSISTOR 2SA1162-G        |           |           |            |
| 2086 |   | M     | TRANSISTOR |     | Q5210   | 8-759-027-61 | TRANSISTOR DTC144VKA-T146   |           |           |            |
| 2087 |   | M     | TRANSISTOR |     | Q5211   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX     |           |           |            |
| 2088 |   | M     | TRANSISTOR |     | Q5212   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX     |           |           |            |
| 2089 |   | M     | TRANSISTOR |     | Q5213   | 8-729-901-47 | TRANSISTOR DTA143EK         |           |           |            |
| 2090 |   | M     | TRANSISTOR |     | Q5214   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX     |           |           |            |
| 2091 |   | M     | TRANSISTOR |     | Q5215   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX     |           |           |            |
| 2092 |   | M     | TRANSISTOR |     | Q5216   | 8-759-027-61 | TRANSISTOR DTC144VKA-T146   |           |           |            |
| 2093 |   | M     | TRANSISTOR |     | Q5217   | 8-729-027-56 | TRANSISTOR DTC143TKA-T146   |           |           |            |
| 2094 |   | M     | TRANSISTOR |     | Q5218   | 8-729-216-22 | TRANSISTOR 2SA1162-G        |           |           |            |
| 2095 |   | M     | TRANSISTOR |     | Q5219   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX     |           |           |            |
| 2096 |   | M     | TRANSISTOR |     | Q5220   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX     |           |           |            |
| 2097 |   | M     | TRANSISTOR |     | Q5221   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX     |           |           |            |
| 2098 |   | M     | TRANSISTOR |     | Q5222   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX     |           |           |            |
| 2099 |   | M     | TRANSISTOR |     | Q5223   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX     |           |           |            |
| 2100 |   | M     | TRANSISTOR |     | Q5224   | 8-729-216-22 | TRANSISTOR 2SA1162-G        |           |           |            |
| 2101 |   | M     | TRANSISTOR |     | Q5225   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX     |           |           |            |
| 2102 |   | M     | TRANSISTOR |     | Q5251   | 8-729-028-28 | TRANSISTOR 2SK2036(TE85L)   |           |           |            |
| 2103 |   | M     | RESISTOR   |     | R4811   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W    |           |           |            |
| 2104 |   | M     | RESISTOR   |     | R4812   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W    |           |           |            |
| 2105 |   | M     | RESISTOR   |     | R4813   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W    |           |           |            |
| 2106 |   | M     | RESISTOR   |     | R4814   | 1-218-840-11 | METAL CHIP 510 0.5% 1/10W   |           |           |            |
| 2107 |   | M     | RESISTOR   |     | R4815   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W    |           |           |            |

| No.  | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption                 | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|-----|---------|--------------|----------------------------|-----------|-----------|------------|
| 2108 |   | M     | RESISTOR |     | R4816   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W   |           |           |            |
| 2109 |   | M     | RESISTOR |     | R4817   | 1-216-845-11 | METAL CHIP 100K 5% 1/10W   |           |           |            |
| 2110 |   | M     | RESISTOR |     | R4818   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 2111 |   | M     | RESISTOR |     | R4819   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 2112 |   | M     | RESISTOR |     | R4820   | 1-216-033-00 | RES-CHIP 220 5% 1/10W      |           |           |            |
| 2113 |   | M     | RESISTOR |     | R4821   | 1-216-845-11 | METAL CHIP 100K 5% 1/10W   |           |           |            |
| 2114 |   | M     | RESISTOR |     | R4822   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 2115 |   | M     | RESISTOR |     | R4823   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 2116 |   | M     | RESISTOR |     | R4824   | 1-216-033-00 | RES-CHIP 220 5% 1/10W      |           |           |            |
| 2117 |   | M     | RESISTOR |     | R4900   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 2118 |   | M     | RESISTOR |     | R4901   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 2119 |   | M     | RESISTOR |     | R4902   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 2120 |   | M     | RESISTOR |     | R4903   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 2121 |   | M     | RESISTOR |     | R4904   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 2122 |   | M     | RESISTOR |     | R4907   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 2123 |   | M     | RESISTOR |     | R4908   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 2124 |   | M     | RESISTOR |     | R4909   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 2125 |   | M     | RESISTOR |     | R4910   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 2126 |   | M     | RESISTOR |     | R4911   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 2127 |   | M     | RESISTOR |     | R4912   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 2128 |   | M     | RESISTOR |     | R4913   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 2129 |   | M     | RESISTOR |     | R4914   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 2130 |   | M     | RESISTOR |     | R4916   | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W |           |           |            |
| 2131 |   | M     | RESISTOR |     | R4919   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 2132 |   | M     | RESISTOR |     | R4920   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 2133 |   | M     | RESISTOR |     | R4921   | 1-216-805-11 | METAL CHIP 47 5% 1/10W     |           |           |            |
| 2134 |   | M     | RESISTOR |     | R4922   | 1-216-801-11 | METAL CHIP 22 5% 1/10W     |           |           |            |
| 2135 |   | M     | RESISTOR |     | R4923   | 1-216-801-11 | METAL CHIP 22 5% 1/10W     |           |           |            |
| 2136 |   | M     | RESISTOR |     | R4926   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W   |           |           |            |
| 2137 |   | M     | RESISTOR |     | R4927   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 2138 |   | M     | RESISTOR |     | R4928   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 2139 |   | M     | RESISTOR |     | R4929   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 2140 |   | M     | RESISTOR |     | R4930   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 2141 |   | M     | RESISTOR |     | R4931   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 2142 |   | M     | RESISTOR |     | R4932   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 2143 |   | M     | RESISTOR |     | R4933   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 2144 |   | M     | RESISTOR |     | R4934   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 2145 |   | M     | RESISTOR |     | R4935   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 2146 |   | M     | RESISTOR |     | R4936   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 2147 |   | M     | RESISTOR |     | R4937   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 2148 |   | M     | RESISTOR |     | R4938   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 2149 |   | M     | RESISTOR |     | R4939   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 2150 |   | M     | RESISTOR |     | R4940   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |

| No.  | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption               | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|-----|---------|--------------|--------------------------|-----------|-----------|------------|
| 2151 |   | M     | RESISTOR |     | R4941   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 2152 |   | M     | RESISTOR |     | R4942   | 1-216-801-11 | METAL CHIP 22 5% 1/10W   |           |           |            |
| 2153 |   | M     | RESISTOR |     | R4943   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2154 |   | M     | RESISTOR |     | R4945   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 2155 |   | M     | RESISTOR |     | R4946   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2156 |   | M     | RESISTOR |     | R4947   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2157 |   | M     | RESISTOR |     | R4948   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2158 |   | M     | RESISTOR |     | R4949   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2159 |   | M     | RESISTOR |     | R4950   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2160 |   | M     | RESISTOR |     | R4951   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2161 |   | M     | RESISTOR |     | R4952   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2162 |   | M     | RESISTOR |     | R4953   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2163 |   | M     | RESISTOR |     | R4954   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2164 |   | M     | RESISTOR |     | R4955   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2165 |   | M     | RESISTOR |     | R4956   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2166 |   | M     | RESISTOR |     | R4957   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2167 |   | M     | RESISTOR |     | R4958   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2168 |   | M     | RESISTOR |     | R4959   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2169 |   | M     | RESISTOR |     | R5001   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2170 |   | M     | RESISTOR |     | R5002   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2171 |   | M     | RESISTOR |     | R5003   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2172 |   | M     | RESISTOR |     | R5004   | 1-218-272-11 | METAL CHIP 5.1K 5% 1/10W |           |           |            |
| 2173 |   | M     | RESISTOR |     | R5005   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2174 |   | M     | RESISTOR |     | R5006   | 1-216-834-11 | METAL CHIP 12K 5% 1/10W  |           |           |            |
| 2175 |   | M     | RESISTOR |     | R5007   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2176 |   | M     | RESISTOR |     | R5008   | 1-216-834-11 | METAL CHIP 12K 5% 1/10W  |           |           |            |
| 2177 |   | M     | RESISTOR |     | R5009   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2178 |   | M     | RESISTOR |     | R5010   | 1-216-834-11 | METAL CHIP 12K 5% 1/10W  |           |           |            |
| 2179 |   | M     | RESISTOR |     | R5011   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2180 |   | M     | RESISTOR |     | R5012   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2181 |   | M     | RESISTOR |     | R5013   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2182 |   | M     | RESISTOR |     | R5014   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2183 |   | M     | RESISTOR |     | R5015   | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W |           |           |            |
| 2184 |   | M     | RESISTOR |     | R5016   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W |           |           |            |
| 2185 |   | M     | RESISTOR |     | R5017   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2186 |   | M     | RESISTOR |     | R5018   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2187 |   | M     | RESISTOR |     | R5019   | 1-216-793-11 | METAL CHIP 4.7 5% 1/10W  |           |           |            |
| 2188 |   | M     | RESISTOR |     | R5020   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2189 |   | M     | RESISTOR |     | R5021   | 1-216-801-11 | METAL CHIP 22 5% 1/10W   |           |           |            |
| 2190 |   | M     | RESISTOR |     | R5022   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2191 |   | M     | RESISTOR |     | R5023   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 2192 |   | M     | RESISTOR |     | R5024   | 1-216-836-11 | METAL CHIP 18K 5% 1/10W  |           |           |            |
| 2193 |   | M     | RESISTOR |     | R5025   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |

| No.  | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption               | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|-----|---------|--------------|--------------------------|-----------|-----------|------------|
| 2194 |   | M     | RESISTOR |     | R5026   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2195 |   | M     | RESISTOR |     | R5027   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2196 |   | M     | RESISTOR |     | R5028   | 1-216-797-11 | METAL CHIP 10 5% 1/10W   |           |           |            |
| 2197 |   | M     | RESISTOR |     | R5029   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2198 |   | M     | RESISTOR |     | R5030   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 2199 |   | M     | RESISTOR |     | R5032   | 1-216-797-11 | METAL CHIP 10 5% 1/10W   |           |           |            |
| 2200 |   | M     | RESISTOR |     | R5033   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2201 |   | M     | RESISTOR |     | R5034   | 1-216-797-11 | METAL CHIP 10 5% 1/10W   |           |           |            |
| 2202 |   | M     | RESISTOR |     | R5035   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2203 |   | M     | RESISTOR |     | R5037   | 1-216-797-11 | METAL CHIP 10 5% 1/10W   |           |           |            |
| 2204 |   | M     | RESISTOR |     | R5038   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2205 |   | M     | RESISTOR |     | R5039   | 1-216-828-11 | METAL CHIP 3.9K 5% 1/10W |           |           |            |
| 2206 |   | M     | RESISTOR |     | R5040   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W |           |           |            |
| 2207 |   | M     | RESISTOR |     | R5041   | 1-216-834-11 | METAL CHIP 12K 5% 1/10W  |           |           |            |
| 2208 |   | M     | RESISTOR |     | R5042   | 1-216-797-11 | METAL CHIP 10 5% 1/10W   |           |           |            |
| 2209 |   | M     | RESISTOR |     | R5044   | 1-216-797-11 | METAL CHIP 10 5% 1/10W   |           |           |            |
| 2210 |   | M     | RESISTOR |     | R5045   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2211 |   | M     | RESISTOR |     | R5046   | 1-216-797-11 | METAL CHIP 10 5% 1/10W   |           |           |            |
| 2212 |   | M     | RESISTOR |     | R5047   | 1-216-845-11 | METAL CHIP 100K 5% 1/10W |           |           |            |
| 2213 |   | M     | RESISTOR |     | R5102   | 1-216-845-11 | METAL CHIP 100K 5% 1/10W |           |           |            |
| 2214 |   | M     | RESISTOR |     | R5105   | 1-216-845-11 | METAL CHIP 100K 5% 1/10W |           |           |            |
| 2215 |   | M     | RESISTOR |     | R5107   | 1-216-845-11 | METAL CHIP 100K 5% 1/10W |           |           |            |
| 2216 |   | M     | RESISTOR |     | R5116   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2217 |   | M     | RESISTOR |     | R5117   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2218 |   | M     | RESISTOR |     | R5119   | 1-216-801-11 | METAL CHIP 22 5% 1/10W   |           |           |            |
| 2219 |   | M     | RESISTOR |     | R5120   | 1-216-801-11 | METAL CHIP 22 5% 1/10W   |           |           |            |
| 2220 |   | M     | RESISTOR |     | R5121   | 1-216-801-11 | METAL CHIP 22 5% 1/10W   |           |           |            |
| 2221 |   | M     | RESISTOR |     | R5122   | 1-216-801-11 | METAL CHIP 22 5% 1/10W   |           |           |            |
| 2222 |   | M     | RESISTOR |     | R5126   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2223 |   | M     | RESISTOR |     | R5127   | 1-216-847-11 | METAL CHIP 150K 5% 1/10W |           |           |            |
| 2224 |   | M     | RESISTOR |     | R5128   | 1-216-853-11 | METAL CHIP 470K 5% 1/10W |           |           |            |
| 2225 |   | M     | RESISTOR |     | R5129   | 1-216-847-11 | METAL CHIP 150K 5% 1/10W |           |           |            |
| 2226 |   | M     | RESISTOR |     | R5130   | 1-216-853-11 | METAL CHIP 470K 5% 1/10W |           |           |            |
| 2227 |   | M     | RESISTOR |     | R5132   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2228 |   | M     | RESISTOR |     | R5133   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2229 |   | M     | RESISTOR |     | R5134   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W |           |           |            |
| 2230 |   | M     | RESISTOR |     | R5144   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2231 |   | M     | RESISTOR |     | R5151   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2232 |   | M     | RESISTOR |     | R5152   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2233 |   | M     | RESISTOR |     | R5153   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 2234 |   | M     | RESISTOR |     | R5154   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 2235 |   | M     | RESISTOR |     | R5156   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 2236 |   | M     | RESISTOR |     | R5157   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |

| No.  | # | Board | Type     | △/* | Ref.No. | Part No.     | Description |      |    |       | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|-----|---------|--------------|-------------|------|----|-------|-----------|-----------|------------|
| 2237 |   | M     | RESISTOR |     | R5159   | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W |           |           |            |
| 2238 |   | M     | RESISTOR |     | R5160   | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W |           |           |            |
| 2239 |   | M     | RESISTOR |     | R5161   | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W |           |           |            |
| 2240 |   | M     | RESISTOR |     | R5162   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 2241 |   | M     | RESISTOR |     | R5163   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 2242 |   | M     | RESISTOR |     | R5164   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 2243 |   | M     | RESISTOR |     | R5165   | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W |           |           |            |
| 2244 |   | M     | RESISTOR |     | R5166   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 2245 |   | M     | RESISTOR |     | R5167   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 2246 |   | M     | RESISTOR |     | R5168   | 1-216-857-11 | METAL CHIP  | 1M   | 5% | 1/10W |           |           |            |
| 2247 |   | M     | RESISTOR |     | R5169   | 1-216-829-11 | METAL CHIP  | 4.7K | 5% | 1/10W |           |           |            |
| 2248 |   | M     | RESISTOR |     | R5200   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 2249 |   | M     | RESISTOR |     | R5201   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 2250 |   | M     | RESISTOR |     | R5202   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 2251 |   | M     | RESISTOR |     | R5203   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 2252 |   | M     | RESISTOR |     | R5204   | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W |           |           |            |
| 2253 |   | M     | RESISTOR |     | R5205   | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W |           |           |            |
| 2254 |   | M     | RESISTOR |     | R5210   | 1-216-841-11 | METAL CHIP  | 47K  | 5% | 1/10W |           |           |            |
| 2255 |   | M     | RESISTOR |     | R5215   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 2256 |   | M     | RESISTOR |     | R5219   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 2257 |   | M     | RESISTOR |     | R5220   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 2258 |   | M     | RESISTOR |     | R5222   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 2259 |   | M     | RESISTOR |     | R5223   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 2260 |   | M     | RESISTOR |     | R5230   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 2261 |   | M     | RESISTOR |     | R5232   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 2262 |   | M     | RESISTOR |     | R5233   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 2263 |   | M     | RESISTOR |     | R5234   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 2264 |   | M     | RESISTOR |     | R5235   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 2265 |   | M     | RESISTOR |     | R5243   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 2266 |   | M     | RESISTOR |     | R5252   | 1-216-841-11 | METAL CHIP  | 47K  | 5% | 1/10W |           |           |            |
| 2267 |   | M     | RESISTOR |     | R5253   | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W |           |           |            |
| 2268 |   | M     | RESISTOR |     | R5254   | 1-216-853-11 | METAL CHIP  | 470K | 5% | 1/10W |           |           |            |
| 2269 |   | M     | RESISTOR |     | R5255   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 2270 |   | M     | RESISTOR |     | R5256   | 1-216-825-11 | METAL CHIP  | 2.2K | 5% | 1/10W |           |           |            |
| 2271 |   | M     | RESISTOR |     | R5262   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 2272 |   | M     | RESISTOR |     | R5263   | 1-216-853-11 | METAL CHIP  | 470K | 5% | 1/10W |           |           |            |
| 2273 |   | M     | RESISTOR |     | R5264   | 1-216-845-11 | METAL CHIP  | 100K | 5% | 1/10W |           |           |            |
| 2274 |   | M     | RESISTOR |     | R5265   | 1-216-841-11 | METAL CHIP  | 47K  | 5% | 1/10W |           |           |            |
| 2275 |   | M     | RESISTOR |     | R5266   | 1-216-801-11 | METAL CHIP  | 22   | 5% | 1/10W |           |           |            |
| 2276 |   | M     | RESISTOR |     | R5267   | 1-216-825-11 | METAL CHIP  | 2.2K | 5% | 1/10W |           |           |            |
| 2277 |   | M     | RESISTOR |     | R5270   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 2278 |   | M     | RESISTOR |     | R5272   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 2279 |   | M     | RESISTOR |     | R5273   | 1-216-841-11 | METAL CHIP  | 47K  | 5% | 1/10W |           |           |            |

| No.  | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption               | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|-----|---------|--------------|--------------------------|-----------|-----------|------------|
| 2280 |   | M     | RESISTOR |     | R5274   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2281 |   | M     | RESISTOR |     | R5275   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W |           |           |            |
| 2282 |   | M     | RESISTOR |     | R5276   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W |           |           |            |
| 2283 |   | M     | RESISTOR |     | R5280   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2284 |   | M     | RESISTOR |     | R5282   | 1-216-817-11 | METAL CHIP 470 5% 1/10W  |           |           |            |
| 2285 |   | M     | RESISTOR |     | R5283   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2286 |   | M     | RESISTOR |     | R5284   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2287 |   | M     | RESISTOR |     | R5286   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2288 |   | M     | RESISTOR |     | R5290   | 1-216-817-11 | METAL CHIP 470 5% 1/10W  |           |           |            |
| 2289 |   | M     | RESISTOR |     | R5293   | 1-216-801-11 | METAL CHIP 22 5% 1/10W   |           |           |            |
| 2290 |   | M     | RESISTOR |     | R5294   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2291 |   | M     | RESISTOR |     | R5295   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2292 |   | M     | RESISTOR |     | R5296   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2293 |   | M     | RESISTOR |     | R5297   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2294 |   | M     | RESISTOR |     | R5298   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2295 |   | M     | RESISTOR |     | R5299   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2296 |   | M     | RESISTOR |     | R5300   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2297 |   | M     | RESISTOR |     | R5301   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2298 |   | M     | RESISTOR |     | R5302   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W  |           |           |            |
| 2299 |   | M     | RESISTOR |     | R5303   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 2300 |   | M     | RESISTOR |     | R5305   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2301 |   | M     | RESISTOR |     | R5306   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2302 |   | M     | RESISTOR |     | R5307   | 1-216-801-11 | METAL CHIP 22 5% 1/10W   |           |           |            |
| 2303 |   | M     | RESISTOR |     | R5308   | 1-216-801-11 | METAL CHIP 22 5% 1/10W   |           |           |            |
| 2304 |   | M     | RESISTOR |     | R5309   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2305 |   | M     | RESISTOR |     | R5310   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2306 |   | M     | RESISTOR |     | R5311   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2307 |   | M     | RESISTOR |     | R5312   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2308 |   | M     | RESISTOR |     | R5313   | 1-216-835-11 | METAL CHIP 15K 5% 1/10W  |           |           |            |
| 2309 |   | M     | RESISTOR |     | R5314   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2310 |   | M     | RESISTOR |     | R5315   | 1-216-801-11 | METAL CHIP 22 5% 1/10W   |           |           |            |
| 2311 |   | M     | RESISTOR |     | R5316   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2312 |   | M     | RESISTOR |     | R5317   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W  |           |           |            |
| 2313 |   | M     | RESISTOR |     | R5318   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2314 |   | M     | RESISTOR |     | R5319   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2315 |   | M     | RESISTOR |     | R5320   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2316 |   | M     | RESISTOR |     | R5321   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2317 |   | M     | RESISTOR |     | R5322   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2318 |   | M     | RESISTOR |     | R5323   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2319 |   | M     | RESISTOR |     | R5325   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2320 |   | M     | RESISTOR |     | R5326   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W  |           |           |            |
| 2321 |   | M     | RESISTOR |     | R5327   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2322 |   | M     | RESISTOR |     | R5329   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |

| No.  | # | Board | Type     | △ / * | Ref.No. | Part No.     | Descrption               | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|-------|---------|--------------|--------------------------|-----------|-----------|------------|
| 2323 |   | M     | RESISTOR |       | R5330   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W |           |           |            |
| 2324 |   | M     | RESISTOR |       | R5331   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2325 |   | M     | RESISTOR |       | R5332   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2326 |   | M     | RESISTOR |       | R5333   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2327 |   | M     | RESISTOR |       | R5334   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2328 |   | M     | RESISTOR |       | R5335   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 2329 |   | M     | RESISTOR |       | R5336   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2330 |   | M     | RESISTOR |       | R5337   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2331 |   | M     | RESISTOR |       | R5338   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2332 |   | M     | RESISTOR |       | R5339   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2333 |   | M     | RESISTOR |       | R5340   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2334 |   | M     | RESISTOR |       | R5341   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2335 |   | M     | RESISTOR |       | R5342   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2336 |   | M     | RESISTOR |       | R5343   | 1-216-805-11 | METAL CHIP 47 5% 1/10W   |           |           |            |
| 2337 |   | M     | RESISTOR |       | R5344   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2338 |   | M     | RESISTOR |       | R5345   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2339 |   | M     | RESISTOR |       | R5346   | 1-216-837-11 | METAL CHIP 22K 5% 1/10W  |           |           |            |
| 2340 |   | M     | RESISTOR |       | R5347   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2341 |   | M     | RESISTOR |       | R5348   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2342 |   | M     | RESISTOR |       | R5349   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2343 |   | M     | RESISTOR |       | R5350   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2344 |   | M     | RESISTOR |       | R5352   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 2345 |   | M     | RESISTOR |       | R5353   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2346 |   | M     | RESISTOR |       | R5354   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2347 |   | M     | RESISTOR |       | R5355   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2348 |   | M     | RESISTOR |       | R5356   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2349 |   | M     | RESISTOR |       | R5357   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2350 |   | M     | RESISTOR |       | R5359   | 1-216-845-11 | METAL CHIP 100K 5% 1/10W |           |           |            |
| 2351 |   | M     | RESISTOR |       | R5361   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2352 |   | M     | RESISTOR |       | R5362   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2353 |   | M     | RESISTOR |       | R5363   | 1-216-849-11 | METAL CHIP 220K 5% 1/10W |           |           |            |
| 2354 |   | M     | RESISTOR |       | R5364   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2355 |   | M     | RESISTOR |       | R5365   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2356 |   | M     | RESISTOR |       | R5366   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2357 |   | M     | RESISTOR |       | R5367   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2358 |   | M     | RESISTOR |       | R5368   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2359 |   | M     | RESISTOR |       | R5369   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2360 |   | M     | RESISTOR |       | R5370   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2361 |   | M     | RESISTOR |       | R5371   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2362 |   | M     | RESISTOR |       | R5372   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2363 |   | M     | RESISTOR |       | R5373   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |
| 2364 |   | M     | RESISTOR |       | R5374   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2365 |   | M     | RESISTOR |       | R5375   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |

| No.  | # | Board | Type     | △/* | Ref.No. | Part No.     | Description |      |    |       | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|-----|---------|--------------|-------------|------|----|-------|-----------|-----------|------------|
| 2366 |   | M     | RESISTOR |     | R5376   | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W |           |           |            |
| 2367 |   | M     | RESISTOR |     | R5377   | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W |           |           |            |
| 2368 |   | M     | RESISTOR |     | R5378   | 1-216-845-11 | METAL CHIP  | 100K | 5% | 1/10W |           |           |            |
| 2369 |   | M     | RESISTOR |     | R5379   | 1-216-835-11 | METAL CHIP  | 15K  | 5% | 1/10W |           |           |            |
| 2370 |   | M     | RESISTOR |     | R5380   | 1-216-835-11 | METAL CHIP  | 15K  | 5% | 1/10W |           |           |            |
| 2371 |   | M     | RESISTOR |     | R5381   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 2372 |   | M     | RESISTOR |     | R5382   | 1-216-837-11 | METAL CHIP  | 22K  | 5% | 1/10W |           |           |            |
| 2373 |   | M     | RESISTOR |     | R5383   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 2374 |   | M     | RESISTOR |     | R5384   | 1-216-837-11 | METAL CHIP  | 22K  | 5% | 1/10W |           |           |            |
| 2375 |   | M     | RESISTOR |     | R5385   | 1-216-837-11 | METAL CHIP  | 22K  | 5% | 1/10W |           |           |            |
| 2376 |   | M     | RESISTOR |     | R5386   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 2377 |   | M     | RESISTOR |     | R5387   | 1-216-841-11 | METAL CHIP  | 47K  | 5% | 1/10W |           |           |            |
| 2378 |   | M     | RESISTOR |     | R5388   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 2379 |   | M     | RESISTOR |     | R5389   | 1-216-835-11 | METAL CHIP  | 15K  | 5% | 1/10W |           |           |            |
| 2380 |   | M     | RESISTOR |     | R5390   | 1-216-809-11 | METAL CHIP  | 100  | 5% | 1/10W |           |           |            |
| 2381 |   | M     | RESISTOR |     | R5391   | 1-216-817-11 | METAL CHIP  | 470  | 5% | 1/10W |           |           |            |
| 2382 |   | M     | RESISTOR |     | R5392   | 1-216-817-11 | METAL CHIP  | 470  | 5% | 1/10W |           |           |            |
| 2383 |   | M     | RESISTOR |     | R5393   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 2384 |   | M     | RESISTOR |     | R5394   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 2385 |   | M     | RESISTOR |     | R5395   | 1-216-841-11 | METAL CHIP  | 47K  | 5% | 1/10W |           |           |            |
| 2386 |   | M     | RESISTOR |     | R5396   | 1-216-841-11 | METAL CHIP  | 47K  | 5% | 1/10W |           |           |            |
| 2387 |   | M     | RESISTOR |     | R5397   | 1-216-825-11 | METAL CHIP  | 2.2K | 5% | 1/10W |           |           |            |
| 2388 |   | M     | RESISTOR |     | R5398   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 2389 |   | M     | RESISTOR |     | R5399   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 2390 |   | M     | RESISTOR |     | R5400   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 2391 |   | M     | RESISTOR |     | R5401   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 2392 |   | M     | RESISTOR |     | R5402   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 2393 |   | M     | RESISTOR |     | R5403   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 2394 |   | M     | RESISTOR |     | R5404   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 2395 |   | M     | RESISTOR |     | R5405   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 2396 |   | M     | RESISTOR |     | R5406   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 2397 |   | M     | RESISTOR |     | R5407   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 2398 |   | M     | RESISTOR |     | R5408   | 1-216-864-11 | SHORT CHIP  | 0    |    |       |           |           |            |
| 2399 |   | M     | RESISTOR |     | R5409   | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W |           |           |            |
| 2400 |   | M     | RESISTOR |     | R5410   | 1-216-827-11 | METAL CHIP  | 3.3K | 5% | 1/10W |           |           |            |
| 2401 |   | M     | RESISTOR |     | R5411   | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W |           |           |            |
| 2402 |   | M     | RESISTOR |     | R5412   | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W |           |           |            |
| 2403 |   | M     | RESISTOR |     | R5413   | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W |           |           |            |
| 2404 |   | M     | RESISTOR |     | R5414   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 2405 |   | M     | RESISTOR |     | R5415   | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W |           |           |            |
| 2406 |   | M     | RESISTOR |     | R5416   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 2407 |   | M     | RESISTOR |     | R5417   | 1-216-833-11 | METAL CHIP  | 10K  | 5% | 1/10W |           |           |            |
| 2408 |   | M     | RESISTOR |     | R5418   | 1-216-821-11 | METAL CHIP  | 1K   | 5% | 1/10W |           |           |            |



| No.  | # | Board | Type         | △/* | Ref.No. | Part No.     | Descrption                | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|--------------|-----|---------|--------------|---------------------------|-----------|-----------|------------|
| 2409 |   | M     | RESISTOR     |     | R5419   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W    |           |           |            |
| 2410 |   | M     | RESISTOR     |     | R5421   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 2411 |   | M     | RESISTOR     |     | R5422   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 2412 |   | M     | RESISTOR     |     | R5427   | 1-216-839-11 | METAL CHIP 33K 5% 1/10W   |           |           |            |
| 2413 |   | M     | RESISTOR     |     | R5428   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 2414 |   | M     | RESISTOR     |     | R5429   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 2415 |   | M     | RESISTOR     |     | R5430   | 1-216-837-11 | METAL CHIP 22K 5% 1/10W   |           |           |            |
| 2416 |   | M     | RESISTOR     |     | R5431   | 1-216-837-11 | METAL CHIP 22K 5% 1/10W   |           |           |            |
| 2417 |   | M     | RESISTOR     |     | R5432   | 1-216-845-11 | METAL CHIP 100K 5% 1/10W  |           |           |            |
| 2418 |   | M     | RESISTOR     |     | R5433   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W   |           |           |            |
| 2419 |   | M     | RESISTOR     |     | R5434   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W   |           |           |            |
| 2420 |   | M     | RESISTOR     |     | R5435   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 2421 |   | M     | RESISTOR     |     | R5436   | 1-216-845-11 | METAL CHIP 100K 5% 1/10W  |           |           |            |
| 2422 |   | M     | RESISTOR     |     | R5437   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 2423 |   | M     | RESISTOR     |     | R5438   | 1-216-845-11 | METAL CHIP 100K 5% 1/10W  |           |           |            |
| 2424 |   | M     | RESISTOR     |     | R5439   | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W  |           |           |            |
| 2425 |   | M     | NETWORK      |     | RB4900  | 1-234-370-21 | RES, NETWORK 22X4 (1005)  |           |           |            |
| 2426 |   | M     | NETWORK      |     | RB4901  | 1-234-370-21 | RES, NETWORK 22X4 (1005)  |           |           |            |
| 2427 |   | M     | NETWORK      |     | RB4902  | 1-234-370-21 | RES, NETWORK 22X4 (1005)  |           |           |            |
| 2428 |   | M     | NETWORK      |     | RB4903  | 1-234-370-21 | RES, NETWORK 22X4 (1005)  |           |           |            |
| 2429 |   | M     | NETWORK      |     | RB4904  | 1-234-370-21 | RES, NETWORK 22X4 (1005)  |           |           |            |
| 2430 |   | M     | NETWORK      |     | RB4905  | 1-233-796-11 | RES, NETWORK (1608)       |           |           |            |
| 2431 |   | M     | NETWORK      |     | RB4906  | 1-239-711-91 | NETWORK RESISTOR (CHIP) 0 |           |           |            |
| 2432 |   | M     | NETWORK      |     | RB4907  | 1-239-711-91 | NETWORK RESISTOR (CHIP) 0 |           |           |            |
| 2433 |   | M     | NETWORK      |     | RB4908  | 1-233-796-11 | RES, NETWORK (1608)       |           |           |            |
| 2434 |   | M     | NETWORK      |     | RB4909  | 1-234-371-21 | RES, NETWORK 47X4 (1005)  |           |           |            |
| 2435 |   | M     | NETWORK      |     | RB4910  | 1-234-371-21 | RES, NETWORK 47X4 (1005)  |           |           |            |
| 2436 |   | M     | NETWORK      |     | RB4911  | 1-234-371-21 | RES, NETWORK 47X4 (1005)  |           |           |            |
| 2437 |   | M     | NETWORK      |     | RB4912  | 1-234-371-21 | RES, NETWORK 47X4 (1005)  |           |           |            |
| 2438 |   | M     | NETWORK      |     | RB4913  | 1-234-371-21 | RES, NETWORK 47X4 (1005)  |           |           |            |
| 2439 |   | M     | NETWORK      |     | RB4914  | 1-234-371-21 | RES, NETWORK 47X4 (1005)  |           |           |            |
| 2440 |   | M     | NETWORK      |     | RB4915  | 1-234-371-21 | RES, NETWORK 47X4 (1005)  |           |           |            |
| 2441 |   | M     | CHIP CHECKER |     | TP4851  | 1-535-877-22 | CHIP, CHECKER             |           |           |            |
| 2442 |   | M     | CHIP CHECKER |     | TP4900  | 1-535-877-22 | CHIP, CHECKER             |           |           |            |
| 2443 |   | M     | CHIP CHECKER |     | TP4901  | 1-535-877-22 | CHIP, CHECKER             |           |           |            |
| 2444 |   | M     | CHIP CHECKER |     | TP4902  | 1-535-877-22 | CHIP, CHECKER             |           |           |            |
| 2445 |   | M     | CHIP CHECKER |     | TP4903  | 1-535-877-22 | CHIP, CHECKER             |           |           |            |
| 2446 |   | M     | CHIP CHECKER |     | TP4904  | 1-535-877-22 | CHIP, CHECKER             |           |           |            |
| 2447 |   | M     | CHIP CHECKER |     | TP4905  | 1-535-877-22 | CHIP, CHECKER             |           |           |            |
| 2448 |   | M     | CHIP CHECKER |     | TP4906  | 1-535-877-22 | CHIP, CHECKER             |           |           |            |
| 2449 |   | M     | CHIP CHECKER |     | TP4907  | 1-535-877-22 | CHIP, CHECKER             |           |           |            |
| 2450 |   | M     | CHIP CHECKER |     | TP4908  | 1-535-877-22 | CHIP, CHECKER             |           |           |            |
| 2451 |   | M     | CHIP CHECKER |     | TP4909  | 1-535-877-22 | CHIP, CHECKER             |           |           |            |

| No.  | # | Board | Type             | △ /* | Ref.No. | Part No.     | Descrption                     | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|------------------|------|---------|--------------|--------------------------------|-----------|-----------|------------|
| 2452 |   | M     | CHIP CHECKER     |      | TP4911  | 1-535-877-22 | CHIP, CHECKER                  |           |           |            |
| 2453 |   | M     | CHIP CHECKER     |      | TP4913  | 1-535-877-22 | CHIP, CHECKER                  |           |           |            |
| 2454 |   | M     | CHIP CHECKER     |      | TP5151  | 1-535-877-22 | CHIP, CHECKER                  |           |           |            |
| 2455 |   | M     | CHIP CHECKER     |      | TP5200  | 1-535-877-22 | CHIP, CHECKER                  |           |           |            |
| 2456 |   | M     | CHIP CHECKER     |      | TP5201  | 1-535-877-22 | CHIP, CHECKER                  |           |           |            |
| 2457 |   | M     | VARISTOR         |      | VD4801  | 1-805-043-11 | ABSORBER, CHIP SURGE           |           |           |            |
| 2458 |   | M     | VARISTOR         |      | VD4802  | 1-805-043-11 | ABSORBER, CHIP SURGE           |           |           |            |
| 2459 |   | M     | VARISTOR         |      | VD4803  | 1-805-043-11 | ABSORBER, CHIP SURGE           |           |           |            |
| 2460 |   | M     | VARISTOR         |      | VD4804  | 1-805-043-11 | ABSORBER, CHIP SURGE           |           |           |            |
| 2461 |   | M     | VARISTOR         |      | VD4805  | 1-805-043-11 | ABSORBER, CHIP SURGE           |           |           |            |
| 2462 |   | M     | VARISTOR         |      | VD4806  | 1-805-043-11 | ABSORBER, CHIP SURGE           |           |           |            |
| 2463 |   | M     | VARISTOR         |      | VD4807  | 1-805-043-11 | ABSORBER, CHIP SURGE           |           |           |            |
| 2464 |   | M     | VARISTOR         |      | VD4808  | 1-805-043-11 | ABSORBER, CHIP SURGE           |           |           |            |
| 2465 |   | M     | VARISTOR         |      | VD4809  | 1-805-043-11 | ABSORBER, CHIP SURGE           |           |           |            |
| 2466 |   | M     | VARISTOR         |      | VD4810  | 1-805-043-11 | ABSORBER, CHIP SURGE           |           |           |            |
| 2467 |   | M     | CRYSTAL          |      | X4900   | 1-795-739-21 | CRYSTAL OSCILLATOR (SMD)       |           |           |            |
| 2468 |   | M     | CRYSTAL          |      | X5001   | 1-781-465-21 | VIBRATOR, CRYSTAL              |           |           |            |
| 2469 |   | M     | CRYSTAL          |      | X5200   | 1-781-829-21 | OSCILLATOR, CRYSTAL (SMD)      |           |           |            |
| 2470 |   | M     | CRYSTAL          |      | X5201   | 1-579-358-21 | VIBLATOR, CRYSTAL              |           |           |            |
| 2471 |   | U1    | CAPACITOR        |      | C9212   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V  |           |           |            |
| 2472 |   | U1    | CAPACITOR        |      | C9221   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V  |           |           |            |
| 2473 |   | U1    | CAPACITOR        |      | C9226   | 1-126-964-11 | ELECT 10UF 20.00% 50V          |           |           |            |
| 2474 |   | U1    | CAPACITOR        |      | C9401   | 1-119-824-11 | ELECT 10UF 20.00% 50V          |           |           |            |
| 2475 |   | U1    | CAPACITOR        |      | C9402   | 1-119-824-11 | ELECT 10UF 20.00% 50V          |           |           |            |
| 2476 |   | U1    | CAPACITOR        |      | C9405   | 1-126-959-11 | ELECT 0.47UF 20.00% 50V        |           |           |            |
| 2477 |   | U1    | CAPACITOR        |      | C9408   | 1-126-959-11 | ELECT 0.47UF 20.00% 50V        |           |           |            |
| 2478 |   | U1    | CAPACITOR        |      | C9409   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2479 |   | U1    | CAPACITOR        |      | C9410   | 1-126-963-11 | ELECT 4.7UF 20.00% 50V         |           |           |            |
| 2480 |   | U1    | CAPACITOR        |      | C9411   | 1-119-824-11 | ELECT 10UF 20.00% 50V          |           |           |            |
| 2481 |   | U1    | CAPACITOR        |      | C9412   | 1-119-824-11 | ELECT 10UF 20.00% 50V          |           |           |            |
| 2482 |   | U1    | CAPACITOR        |      | C9414   | 1-126-963-11 | ELECT 4.7UF 20.00% 50V         |           |           |            |
| 2483 |   | U1    | CAPACITOR        |      | C9417   | 1-126-963-11 | ELECT 4.7UF 20.00% 50V         |           |           |            |
| 2484 |   | U1    | CAPACITOR        |      | C9420   | 1-119-824-11 | ELECT 10UF 20.00% 50V          |           |           |            |
| 2485 |   | U1    | CAPACITOR        |      | C9421   | 1-119-824-11 | ELECT 10UF 20.00% 50V          |           |           |            |
| 2486 |   | U1    | CAPACITOR        |      | C9423   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2487 |   | U1    | CAPACITOR        |      | C9424   | 1-126-963-11 | ELECT 4.7UF 20.00% 50V         |           |           |            |
| 2488 |   | U1    | CAPACITOR        |      | C9430   | 1-119-824-11 | ELECT 10UF 20.00% 50V          |           |           |            |
| 2489 |   | U1    | CAPACITOR        |      | C9431   | 1-119-824-11 | ELECT 10UF 20.00% 50V          |           |           |            |
| 2490 |   | U1    | COATING LEAD PIN | *    | CLP2    | 4-042-408-01 | PIN, COATING LEAD              |           |           |            |
| 2491 |   | U1    | CONNECTOR        |      | CN9401  | 1-779-339-21 | CONNECTOR, FFC/FPC 30P         |           |           |            |
| 2492 |   | U1    | CONNECTOR        |      | CN9402  | 1-779-338-11 | CONNECTOR, FFC/FPC 28P         |           |           |            |
| 2493 |   | U1    | CONNECTOR        |      | CN9403  | 1-774-771-11 | CONNECTOR, FFC/FPC 14P         |           |           |            |
| 2494 |   | U1    | CONNECTOR        | *    | CN9404  | 1-564-519-11 | PLUG, CONNECTOR 4P             |           |           |            |

| No.  | # | Board | Type           | △/* | Ref.No. | Part No.     | Descrption                | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------------|-----|---------|--------------|---------------------------|-----------|-----------|------------|
| 2495 |   | U1    | DIODE          |     | D9224   | 8-719-041-97 | DIODE MA113-(TX)          |           |           |            |
| 2496 |   | U1    | DIODE          |     | D9228   | 8-719-069-55 | DIODE UDZSTE-175.6B       |           |           |            |
| 2497 |   | U1    | DIODE          |     | D9419   | 8-719-977-28 | DIODE DTZ10B              |           |           |            |
| 2498 |   | U1    | DIODE          |     | D9420   | 8-719-977-28 | DIODE DTZ10B              |           |           |            |
| 2499 |   | U1    | DIODE          |     | D9424   | 8-719-977-28 | DIODE DTZ10B              |           |           |            |
| 2500 |   | U1    | DIODE          |     | D9427   | 8-719-977-28 | DIODE DTZ10B              |           |           |            |
| 2501 |   | U1    | DIODE          |     | D9430   | 8-719-977-28 | DIODE DTZ10B              |           |           |            |
| 2502 |   | U1    | DIODE          |     | D9431   | 8-719-977-28 | DIODE DTZ10B              |           |           |            |
| 2503 |   | U1    | DIODE          |     | D9432   | 8-719-977-28 | DIODE DTZ10B              |           |           |            |
| 2504 |   | U1    | DIODE          |     | D9433   | 8-719-977-28 | DIODE DTZ10B              |           |           |            |
| 2505 |   | U1    | DIODE          |     | D9434   | 8-719-977-28 | DIODE DTZ10B              |           |           |            |
| 2506 |   | U1    | DIODE          |     | D9435   | 8-719-977-28 | DIODE DTZ10B              |           |           |            |
| 2507 |   | U1    | DIODE          |     | D9436   | 8-719-977-28 | DIODE DTZ10B              |           |           |            |
| 2508 |   | U1    | DIODE          |     | D9438   | 8-719-977-28 | DIODE DTZ10B              |           |           |            |
| 2509 |   | U1    | DIODE          |     | D9446   | 8-719-977-28 | DIODE DTZ10B              |           |           |            |
| 2510 |   | U1    | DIODE          |     | D9447   | 8-719-977-28 | DIODE DTZ10B              |           |           |            |
| 2511 |   | U1    | SOCKET         |     | J9206   | 1-764-143-11 | JACK                      |           |           |            |
| 2512 |   | U1    | SOCKET         |     | J9400   | 1-816-393-11 | JACK BLOCK, PIN 3P        |           |           |            |
| 2513 |   | U1    | SOCKET         |     | J9401   | 1-816-393-11 | JACK BLOCK, PIN 3P        |           |           |            |
| 2514 |   | U1    | SOCKET         |     | J9406   | 1-817-098-11 | PIN JACK BLOCK 3P         |           |           |            |
| 2515 |   | U1    | SOCKET         |     | J9409   | 1-764-416-11 | TERMINAL BLOCK, (S)       |           |           |            |
| 2516 |   | U1    | SOCKET         |     | J9410   | 1-764-416-11 | TERMINAL BLOCK, (S)       |           |           |            |
| 2517 |   | U1    | SOCKET         |     | J9411   | 1-565-838-11 | JACK BLOCK, PIN 2P        |           |           |            |
| 2518 |   | U1    | SOCKET         |     | J9412   | 1-565-838-11 | JACK BLOCK, PIN 2P        |           |           |            |
| 2519 |   | U1    | CHIP CONDUCTOR |     | JR9400  | 1-216-296-11 | SHORT CHIP 0              |           |           |            |
| 2520 |   | U1    | CHIP CONDUCTOR |     | JR9401  | 1-216-296-11 | SHORT CHIP 0              |           |           |            |
| 2521 |   | U1    | CHIP CONDUCTOR |     | JR9402  | 1-216-295-91 | SHORT CHIP 0              |           |           |            |
| 2522 |   | U1    | CHIP CONDUCTOR |     | JR9403  | 1-216-295-91 | SHORT CHIP 0              |           |           |            |
| 2523 |   | U1    | CHIP CONDUCTOR |     | JR9404  | 1-216-296-11 | SHORT CHIP 0              |           |           |            |
| 2524 |   | U1    | CHIP CONDUCTOR |     | JR9405  | 1-216-296-11 | SHORT CHIP 0              |           |           |            |
| 2525 |   | U1    | CHIP CONDUCTOR |     | JR9406  | 1-216-295-91 | SHORT CHIP 0              |           |           |            |
| 2526 |   | U1    | CHIP CONDUCTOR |     | JR9407  | 1-216-295-91 | SHORT CHIP 0              |           |           |            |
| 2527 |   | U1    | CHIP CONDUCTOR |     | JR9408  | 1-216-295-91 | SHORT CHIP 0              |           |           |            |
| 2528 |   | U1    | CHIP CONDUCTOR |     | JR9409  | 1-216-295-91 | SHORT CHIP 0              |           |           |            |
| 2529 |   | U1    | CHIP CONDUCTOR |     | JR9410  | 1-216-295-91 | SHORT CHIP 0              |           |           |            |
| 2530 |   | U1    | CHIP CONDUCTOR |     | JR9411  | 1-216-295-91 | SHORT CHIP 0              |           |           |            |
| 2531 |   | U1    | TRANSISTOR     |     | Q9206   | 8-729-028-73 | TRANSISTOR DTA114EUA-T106 |           |           |            |
| 2532 |   | U1    | RESISTOR       |     | R9256   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W    |           |           |            |
| 2533 |   | U1    | RESISTOR       |     | R9258   | 1-216-809-11 | METAL CHIP 100 5% 1/10W   |           |           |            |
| 2534 |   | U1    | RESISTOR       |     | R9403   | 1-216-631-11 | METAL CHIP 150 0.5% 1/10W |           |           |            |
| 2535 |   | U1    | RESISTOR       |     | R9404   | 1-216-631-11 | METAL CHIP 150 0.5% 1/10W |           |           |            |
| 2536 |   | U1    | RESISTOR       |     | R9405   | 1-216-631-11 | METAL CHIP 150 0.5% 1/10W |           |           |            |
| 2537 |   | U1    | RESISTOR       |     | R9406   | 1-216-631-11 | METAL CHIP 150 0.5% 1/10W |           |           |            |

| No.  | # | Board | Type             | △ / * | Ref.No. | Part No.     | Description               | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|------------------|-------|---------|--------------|---------------------------|-----------|-----------|------------|
| 2538 |   | U1    | RESISTOR         |       | R9407   | 1-216-631-11 | METAL CHIP 150 0.5% 1/10W |           |           |            |
| 2539 |   | U1    | RESISTOR         |       | R9408   | 1-216-849-11 | METAL CHIP 220K 5% 1/10W  |           |           |            |
| 2540 |   | U1    | RESISTOR         |       | R9409   | 1-216-631-11 | METAL CHIP 150 0.5% 1/10W |           |           |            |
| 2541 |   | U1    | RESISTOR         |       | R9410   | 1-216-849-11 | METAL CHIP 220K 5% 1/10W  |           |           |            |
| 2542 |   | U1    | RESISTOR         |       | R9411   | 1-216-849-11 | METAL CHIP 220K 5% 1/10W  |           |           |            |
| 2543 |   | U1    | RESISTOR         |       | R9412   | 1-216-849-11 | METAL CHIP 220K 5% 1/10W  |           |           |            |
| 2544 |   | U1    | RESISTOR         |       | R9413   | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W  |           |           |            |
| 2545 |   | U1    | RESISTOR         |       | R9414   | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W  |           |           |            |
| 2546 |   | U1    | RESISTOR         |       | R9415   | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W  |           |           |            |
| 2547 |   | U1    | RESISTOR         |       | R9416   | 1-216-849-11 | METAL CHIP 220K 5% 1/10W  |           |           |            |
| 2548 |   | U1    | RESISTOR         |       | R9417   | 1-216-849-11 | METAL CHIP 220K 5% 1/10W  |           |           |            |
| 2549 |   | U1    | RESISTOR         |       | R9418   | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W  |           |           |            |
| 2550 |   | U1    | RESISTOR         |       | R9419   | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W  |           |           |            |
| 2551 |   | U1    | RESISTOR         |       | R9420   | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W  |           |           |            |
| 2552 |   | U1    | RESISTOR         |       | R9425   | 1-216-849-11 | METAL CHIP 220K 5% 1/10W  |           |           |            |
| 2553 |   | U1    | RESISTOR         |       | R9435   | 1-216-849-11 | METAL CHIP 220K 5% 1/10W  |           |           |            |
| 2554 |   | U1    | RESISTOR         |       | R9436   | 1-216-631-11 | METAL CHIP 150 0.5% 1/10W |           |           |            |
| 2555 |   | U1    | RESISTOR         |       | R9437   | 1-216-631-11 | METAL CHIP 150 0.5% 1/10W |           |           |            |
| 2556 |   | U1    | RESISTOR         |       | R9438   | 1-216-631-11 | METAL CHIP 150 0.5% 1/10W |           |           |            |
| 2557 |   | U1    | RESISTOR         |       | R9439   | 1-216-631-11 | METAL CHIP 150 0.5% 1/10W |           |           |            |
| 2558 |   | U1    | RESISTOR         |       | R9440   | 1-216-631-11 | METAL CHIP 150 0.5% 1/10W |           |           |            |
| 2559 |   | U1    | RESISTOR         |       | R9441   | 1-216-631-11 | METAL CHIP 150 0.5% 1/10W |           |           |            |
| 2560 |   | U1    | VARISTOR         |       | VD9401  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2561 |   | U1    | VARISTOR         |       | VD9402  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2562 |   | U1    | VARISTOR         |       | VD9403  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2563 |   | U1    | VARISTOR         |       | VD9404  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2564 |   | U1    | VARISTOR         |       | VD9407  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2565 |   | U1    | VARISTOR         |       | VD9408  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2566 |   | U1    | VARISTOR         |       | VD9409  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2567 |   | U1    | VARISTOR         |       | VD9410  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2568 |   | U1    | VARISTOR         |       | VD9416  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2569 |   | U1    | VARISTOR         |       | VD9417  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2570 |   | U1    | VARISTOR         |       | VD9418  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2571 |   | U1    | VARISTOR         |       | VD9430  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2572 |   | U1    | VARISTOR         |       | VD9431  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2573 |   | U1    | VARISTOR         |       | VD9432  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2574 |   | U1    | VARISTOR         |       | VD9433  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2575 |   | U1    | VARISTOR         |       | VD9434  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2576 |   | U1    | VARISTOR         |       | VD9435  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2577 |   | U1    | VARISTOR         |       | VD9436  | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |
| 2578 |   | U2    | COATING LEAD PIN | *     | CLP1    | 4-042-408-01 | PIN, COATING LEAD         |           |           |            |
| 2579 |   | U2    | CONNECTOR        |       | CN9406  | 1-779-329-11 | CONNECTOR, FFC/FPC 10P    |           |           |            |
| 2580 |   | U2    | DIODE            |       | D9410   | 1-803-974-21 | VARISTOR, CHIP (1608)     |           |           |            |

| No.  | # | Board | Type      | △/* | Ref.No. | Part No.     | Description                      | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-----|---------|--------------|----------------------------------|-----------|-----------|------------|
| 2581 |   | U2    | SOCKET    |     | J9405   | 1-764-416-11 | TERMINAL BLOCK, (S)              |           |           |            |
| 2582 |   | U2    | RESISTOR  |     | R9428   | 1-216-849-11 | METAL CHIP 220K 5% 1/10W         |           |           |            |
| 2583 |   | U2    | RESISTOR  |     | R9429   | 1-216-849-11 | METAL CHIP 220K 5% 1/10W         |           |           |            |
| 2584 |   | U2    | RESISTOR  |     | R9430   | 1-216-849-11 | METAL CHIP 220K 5% 1/10W         |           |           |            |
| 2585 |   | U2    | VARISTOR  |     | VD9422  | 1-803-974-21 | VARISTOR, CHIP (1608)            |           |           |            |
| 2586 |   | U2    | VARISTOR  |     | VD9425  | 1-803-974-21 | VARISTOR, CHIP (1608)            |           |           |            |
| 2587 |   | U2    | VARISTOR  |     | VD9426  | 1-803-974-21 | VARISTOR, CHIP (1608)            |           |           |            |
| 2588 |   | AU    | CAPACITOR |     | C4721   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2589 |   | AU    | CAPACITOR |     | C4722   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2590 |   | AU    | CAPACITOR |     | C4723   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2591 |   | AU    | CAPACITOR |     | C4724   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2592 |   | AU    | CAPACITOR |     | C4725   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2593 |   | AU    | CAPACITOR |     | C4726   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2594 |   | AU    | CAPACITOR |     | C4727   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2595 |   | AU    | CAPACITOR |     | C4728   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2596 |   | AU    | CAPACITOR |     | C4729   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2597 |   | AU    | CAPACITOR |     | C4730   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2598 |   | AU    | CAPACITOR |     | C4732   | 1-128-934-91 | CERAMIC CHIP 0.33UF 20% 10V      |           |           |            |
| 2599 |   | AU    | CAPACITOR |     | C4733   | 1-162-977-11 | CERAMIC CHIP 0.0018UF 10.00% 50V |           |           |            |
| 2600 |   | AU    | CAPACITOR |     | C4734   | 1-164-227-11 | CERAMIC CHIP 0.022UF 10.00% 25V  |           |           |            |
| 2601 |   | AU    | CAPACITOR |     | C4735   | 1-162-967-11 | CERAMIC CHIP 0.0033UF 10.00% 50V |           |           |            |
| 2602 |   | AU    | CAPACITOR |     | C4736   | 1-164-227-11 | CERAMIC CHIP 0.022UF 10.00% 25V  |           |           |            |
| 2603 |   | AU    | CAPACITOR |     | C4737   | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V      |           |           |            |
| 2604 |   | AU    | CAPACITOR |     | C4738   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 2605 |   | AU    | CAPACITOR |     | C4739   | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V      |           |           |            |
| 2606 |   | AU    | CAPACITOR |     | C4740   | 1-128-934-91 | CERAMIC CHIP 0.33UF 20% 10V      |           |           |            |
| 2607 |   | AU    | CAPACITOR |     | C4741   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 2608 |   | AU    | CAPACITOR |     | C4742   | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V |           |           |            |
| 2609 |   | AU    | CAPACITOR |     | C4743   | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V      |           |           |            |
| 2610 |   | AU    | CAPACITOR |     | C4744   | 1-126-193-11 | ELECT CHIP 1UF 20.00% 50V        |           |           |            |
| 2611 |   | AU    | CAPACITOR |     | C4745   | 1-126-193-11 | ELECT CHIP 1UF 20.00% 50V        |           |           |            |
| 2612 |   | AU    | CAPACITOR |     | C4747   | 1-107-778-11 | ELECT CHIP 470UF 20.00% 16V      |           |           |            |
| 2613 |   | AU    | CAPACITOR |     | C4748   | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V |           |           |            |
| 2614 |   | AU    | CAPACITOR |     | C4749   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 2615 |   | AU    | CAPACITOR |     | C4750   | 1-126-603-11 | ELECT CHIP 4.7UF 20.00% 35V      |           |           |            |
| 2616 |   | AU    | CAPACITOR |     | C4751   | 1-126-193-11 | ELECT CHIP 1UF 20.00% 50V        |           |           |            |
| 2617 |   | AU    | CAPACITOR |     | C4752   | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V |           |           |            |
| 2618 |   | AU    | CAPACITOR |     | C4753   | 1-126-193-11 | ELECT CHIP 1UF 20.00% 50V        |           |           |            |
| 2619 |   | AU    | CAPACITOR |     | C4754   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 2620 |   | AU    | CAPACITOR |     | C4755   | 1-126-193-11 | ELECT CHIP 1UF 20.00% 50V        |           |           |            |
| 2621 |   | AU    | CAPACITOR |     | C4756   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 2622 |   | AU    | CAPACITOR |     | C4757   | 1-128-934-91 | CERAMIC CHIP 0.33UF 20% 10V      |           |           |            |
| 2623 |   | AU    | CAPACITOR |     | C4758   | 1-162-977-11 | CERAMIC CHIP 0.0018UF 10.00% 50V |           |           |            |

| No.  | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                       | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-----|---------|--------------|----------------------------------|-----------|-----------|------------|
| 2624 |   | AU    | CAPACITOR |     | C4759   | 1-164-227-11 | CERAMIC CHIP 0.022UF 10.00% 25V  |           |           |            |
| 2625 |   | AU    | CAPACITOR |     | C4760   | 1-162-967-11 | CERAMIC CHIP 0.0033UF 10.00% 50V |           |           |            |
| 2626 |   | AU    | CAPACITOR |     | C4761   | 1-126-193-11 | ELECT CHIP 1UF 20.00% 50V        |           |           |            |
| 2627 |   | AU    | CAPACITOR |     | C4762   | 1-126-193-11 | ELECT CHIP 1UF 20.00% 50V        |           |           |            |
| 2628 |   | AU    | CAPACITOR |     | C4763   | 1-126-193-11 | ELECT CHIP 1UF 20.00% 50V        |           |           |            |
| 2629 |   | AU    | CAPACITOR |     | C4764   | 1-126-193-11 | ELECT CHIP 1UF 20.00% 50V        |           |           |            |
| 2630 |   | AU    | CAPACITOR |     | C4765   | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V |           |           |            |
| 2631 |   | AU    | CAPACITOR |     | C4766   | 1-162-968-11 | CERAMIC CHIP 0.0047UF 10.00% 50V |           |           |            |
| 2632 |   | AU    | CAPACITOR |     | C4767   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V   |           |           |            |
| 2633 |   | AU    | CAPACITOR |     | C4768   | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V      |           |           |            |
| 2634 |   | AU    | CAPACITOR |     | C4770   | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V      |           |           |            |
| 2635 |   | AU    | CAPACITOR |     | C4771   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 2636 |   | AU    | CAPACITOR |     | C4772   | 1-127-804-91 | CERAMIC CHIP 100PF 10% 50V       |           |           |            |
| 2637 |   | AU    | CAPACITOR |     | C4773   | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V      |           |           |            |
| 2638 |   | AU    | CAPACITOR |     | C4774   | 1-128-357-11 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2639 |   | AU    | CAPACITOR |     | C4775   | 1-128-357-11 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2640 |   | AU    | CAPACITOR |     | C4776   | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V      |           |           |            |
| 2641 |   | AU    | CAPACITOR |     | C4777   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 2642 |   | AU    | CAPACITOR |     | C4778   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 2643 |   | AU    | CAPACITOR |     | C4779   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2644 |   | AU    | CAPACITOR |     | C4780   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 2645 |   | AU    | CAPACITOR |     | C4781   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 2646 |   | AU    | CAPACITOR |     | C4782   | 1-127-804-91 | CERAMIC CHIP 100PF 10% 50V       |           |           |            |
| 2647 |   | AU    | CAPACITOR |     | C4784   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2648 |   | AU    | CAPACITOR |     | C4785   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 2649 |   | AU    | CAPACITOR |     | C4786   | 1-126-193-11 | ELECT CHIP 1UF 20.00% 50V        |           |           |            |
| 2650 |   | AU    | CAPACITOR |     | C4787   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 2651 |   | AU    | CAPACITOR |     | C4788   | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2652 |   | AU    | CAPACITOR |     | C4789   | 1-165-908-91 | CERAMIC CHIP 1UF 10% 10V         |           |           |            |
| 2653 |   | AU    | CAPACITOR |     | C4790   | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2654 |   | AU    | CAPACITOR |     | C4791   | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2655 |   | AU    | CAPACITOR |     | C4792   | 1-165-908-91 | CERAMIC CHIP 1UF 10% 10V         |           |           |            |
| 2656 |   | AU    | CAPACITOR |     | C4793   | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2657 |   | AU    | CAPACITOR |     | C4794   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 2658 |   | AU    | CAPACITOR |     | C4795   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 2659 |   | AU    | CONNECTOR | *   | CN4703  | 1-815-353-21 | CONNECTOR, BOARD TO BOARD 50P    |           |           |            |
| 2660 |   | AU    | CONNECTOR |     | CN4704  | 1-816-466-21 | PIN, CONNECTOR 10P               |           |           |            |
| 2661 |   | AU    | DIODE     |     | D4704   | 8-719-071-74 | DIODE HZU11B1TRF                 |           |           |            |
| 2662 |   | AU    | DIODE     |     | D4705   | 8-719-050-37 | DIODE M1MA152WA-T1               |           |           |            |
| 2663 |   | AU    | DIODE     |     | D4706   | 8-719-050-38 | DIODE M1MA152WK-T1               |           |           |            |
| 2664 |   | AU    | DIODE     |     | D4707   | 8-719-914-44 | DIODE DAP202K                    |           |           |            |
| 2665 |   | AU    | DIODE     |     | D4708   | 8-719-041-97 | DIODE MA113-(TX)                 |           |           |            |
| 2666 |   | AU    | DIODE     |     | D4709   | 8-719-404-50 | DIODE MA111-TX                   |           |           |            |

| No.  | # | Board | Type       | △ / * | Ref.No. | Part No.     | Descrption               | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|------------|-------|---------|--------------|--------------------------|-----------|-----------|------------|
| 2667 |   | AU    | DIODE      |       | D4710   | 8-719-041-97 | DIODE MA113-(TX)         |           |           |            |
| 2668 |   | AU    | IC         |       | IC4703  | 6-702-716-01 | IC NJW1149               |           |           |            |
| 2669 |   | AU    | IC         |       | IC4704  | 8-759-278-58 | IC NJM4558V-TE2          |           |           |            |
| 2670 |   | AU    | IC         |       | IC4705  | 8-759-278-58 | IC NJM4558V-TE2          |           |           |            |
| 2671 |   | AU    | IC         |       | IC4706  | 8-759-278-58 | IC NJM4558V-TE2          |           |           |            |
| 2672 |   | AU    | IC         |       | IC4707  | 8-759-278-58 | IC NJM4558V-TE2          |           |           |            |
| 2673 |   | AU    | IC         |       | IC4708  | 8-759-082-61 | IC TC4W53FU              |           |           |            |
| 2674 |   | AU    | COIL       |       | L4701   | 1-412-058-11 | INDUCTOR 10UH            |           |           |            |
| 2675 |   | AU    | COIL       |       | L4702   | 1-412-058-11 | INDUCTOR 10UH            |           |           |            |
| 2676 |   | AU    | COIL       |       | L4703   | 1-412-058-11 | INDUCTOR 10UH            |           |           |            |
| 2677 |   | AU    | TRANSISTOR |       | Q4706   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX  |           |           |            |
| 2678 |   | AU    | TRANSISTOR |       | Q4707   | 8-729-422-33 | TRANSISTOR 2SD601A-Q-TX  |           |           |            |
| 2679 |   | AU    | TRANSISTOR |       | Q4708   | 8-729-216-22 | TRANSISTOR 2SA1162-G     |           |           |            |
| 2680 |   | AU    | TRANSISTOR |       | Q4709   | 1-801-806-11 | TR DTC144EKA             |           |           |            |
| 2681 |   | AU    | TRANSISTOR |       | Q4710   | 8-729-216-22 | TRANSISTOR 2SA1162-G     |           |           |            |
| 2682 |   | AU    | RESISTOR   |       | R4732   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 2683 |   | AU    | RESISTOR   |       | R4733   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 2684 |   | AU    | RESISTOR   |       | R4734   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 2685 |   | AU    | RESISTOR   |       | R4735   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 2686 |   | AU    | RESISTOR   |       | R4736   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 2687 |   | AU    | RESISTOR   |       | R4737   | 1-216-864-11 | SHORT CHIP 0             |           |           |            |
| 2688 |   | AU    | RESISTOR   |       | R4740   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W |           |           |            |
| 2689 |   | AU    | RESISTOR   |       | R4741   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W |           |           |            |
| 2690 |   | AU    | RESISTOR   |       | R4742   | 1-216-828-11 | METAL CHIP 3.9K 5% 1/10W |           |           |            |
| 2691 |   | AU    | RESISTOR   |       | R4743   | 1-216-828-11 | METAL CHIP 3.9K 5% 1/10W |           |           |            |
| 2692 |   | AU    | RESISTOR   |       | R4748   | 1-218-292-11 | METAL CHIP 20K 5% 1/10W  |           |           |            |
| 2693 |   | AU    | RESISTOR   |       | R4750   | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W |           |           |            |
| 2694 |   | AU    | RESISTOR   |       | R4751   | 1-218-292-11 | METAL CHIP 20K 5% 1/10W  |           |           |            |
| 2695 |   | AU    | RESISTOR   |       | R4752   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2696 |   | AU    | RESISTOR   |       | R4753   | 1-216-809-11 | METAL CHIP 100 5% 1/10W  |           |           |            |
| 2697 |   | AU    | RESISTOR   |       | R4754   | 1-218-292-11 | METAL CHIP 20K 5% 1/10W  |           |           |            |
| 2698 |   | AU    | RESISTOR   |       | R4755   | 1-218-292-11 | METAL CHIP 20K 5% 1/10W  |           |           |            |
| 2699 |   | AU    | RESISTOR   |       | R4757   | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W |           |           |            |
| 2700 |   | AU    | RESISTOR   |       | R4758   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W |           |           |            |
| 2701 |   | AU    | RESISTOR   |       | R4759   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2702 |   | AU    | RESISTOR   |       | R4760   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2703 |   | AU    | RESISTOR   |       | R4761   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W  |           |           |            |
| 2704 |   | AU    | RESISTOR   |       | R4762   | 1-216-844-11 | METAL CHIP 82K 5% 1/10W  |           |           |            |
| 2705 |   | AU    | RESISTOR   |       | R4763   | 1-216-844-11 | METAL CHIP 82K 5% 1/10W  |           |           |            |
| 2706 |   | AU    | RESISTOR   |       | R4764   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W |           |           |            |
| 2707 |   | AU    | RESISTOR   |       | R4765   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W  |           |           |            |
| 2708 |   | AU    | RESISTOR   |       | R4766   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W |           |           |            |
| 2709 |   | AU    | RESISTOR   |       | R4768   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W   |           |           |            |

| No.  | # | Board | Type             | △/* | Ref.No. | Part No.     | Descrption                    | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|------------------|-----|---------|--------------|-------------------------------|-----------|-----------|------------|
| 2710 |   | AU    | RESISTOR         |     | R4769   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W       |           |           |            |
| 2711 |   | AU    | RESISTOR         |     | R4770   | 1-216-837-11 | METAL CHIP 22K 5% 1/10W       |           |           |            |
| 2712 |   | AU    | RESISTOR         |     | R4771   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W       |           |           |            |
| 2713 |   | AU    | RESISTOR         |     | R4772   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W      |           |           |            |
| 2714 |   | AU    | RESISTOR         |     | R4773   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W       |           |           |            |
| 2715 |   | AU    | RESISTOR         |     | R4774   | 1-216-827-11 | METAL CHIP 3.3K 5% 1/10W      |           |           |            |
| 2716 |   | AU    | RESISTOR         |     | R4775   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W      |           |           |            |
| 2717 |   | AU    | RESISTOR         |     | R4776   | 1-216-815-11 | METAL CHIP 330 5% 1/10W       |           |           |            |
| 2718 |   | AU    | RESISTOR         |     | R4777   | 1-216-857-11 | METAL CHIP 1M 5% 1/10W        |           |           |            |
| 2719 |   | AU    | RESISTOR         |     | R4778   | 1-216-837-11 | METAL CHIP 22K 5% 1/10W       |           |           |            |
| 2720 |   | AU    | RESISTOR         |     | R4779   | 1-216-864-11 | SHORT CHIP 0                  |           |           |            |
| 2721 |   | AU    | RESISTOR         |     | R4780   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W       |           |           |            |
| 2722 |   | AU    | RESISTOR         |     | R4781   | 1-216-830-11 | METAL CHIP 5.6K 5% 1/10W      |           |           |            |
| 2723 |   | AU    | RESISTOR         |     | R4782   | 1-216-830-11 | METAL CHIP 5.6K 5% 1/10W      |           |           |            |
| 2724 |   | AU    | RESISTOR         |     | R4783   | 1-216-675-91 | METAL CHIP 10K 0.5% 1/10W     |           |           |            |
| 2725 |   | AU    | RESISTOR         |     | R4784   | 1-216-675-91 | METAL CHIP 10K 0.5% 1/10W     |           |           |            |
| 2726 |   | AU    | RESISTOR         |     | R4789   | 1-216-845-11 | METAL CHIP 100K 5% 1/10W      |           |           |            |
| 2727 |   | AU    | RESISTOR         |     | R4790   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W       |           |           |            |
| 2728 |   | AU    | RESISTOR         |     | R4794   | 1-216-836-11 | METAL CHIP 18K 5% 1/10W       |           |           |            |
| 2729 |   | AU    | RESISTOR         |     | R4795   | 1-216-838-11 | METAL CHIP 27K 5% 1/10W       |           |           |            |
| 2730 |   | IFA   | CAPACITOR        |     | C8001   | 1-104-665-11 | ELECT 100UF 20.00% 25V        |           |           |            |
| 2731 |   | IFA   | CAPACITOR        |     | C8002   | 1-126-935-11 | ELECT 470UF 20.00% 16V        |           |           |            |
| 2732 |   | IFA   | CAPACITOR        |     | C8003   | 1-126-933-11 | ELECT 100UF 20.00% 16V        |           |           |            |
| 2733 |   | IFA   | CAPACITOR        |     | C8004   | 1-126-935-11 | ELECT 470UF 20.00% 16V        |           |           |            |
| 2734 |   | IFA   | COATING LEAD PIN |     | CLP8001 | 4-352-844-21 | PIN, LEAD, COATING            |           |           |            |
| 2735 |   | IFA   | COATING LEAD PIN |     | CLP8002 | 4-352-844-21 | PIN, LEAD, COATING            |           |           |            |
| 2736 |   | IFA   | CONNECTOR        |     | CN8001  | 1-779-936-21 | CONNECTOR, FFC/FPC 18P        |           |           |            |
| 2737 |   | IFA   | CONNECTOR        |     | CN8003  | 1-779-334-11 | CONNECTOR, FFC/FPC 20P        |           |           |            |
| 2738 |   | IFA   | CONNECTOR        | *   | CN8004  | 1-778-391-11 | SOCKET, PC CONNECTOR 96P      |           |           |            |
| 2739 |   | IFA   | CONNECTOR        | *   | CN8005  | 1-816-124-11 | PIN, CONNECTOR (FOR PWB) 18P  |           |           |            |
| 2740 |   | IFA   | CONNECTOR        | *   | CN8008  | 1-691-757-11 | PIN, CONNECTOR (PC BOARD) 8P  |           |           |            |
| 2741 |   | IFA   | CONNECTOR        | *   | CN8011  | 1-793-493-11 | CONNECTOR, BOARD TO BOARD 20P |           |           |            |
| 2742 |   | IFA   | DIODE            |     | D8001   | 8-719-404-50 | DIODE MA111-TX                |           |           |            |
| 2743 |   | IFA   | CHIP CONDUCTOR   |     | FB8001  | 1-216-864-11 | SHORT CHIP 0                  |           |           |            |
| 2744 |   | IFA   | CHIP CONDUCTOR   |     | FB8002  | 1-216-864-11 | SHORT CHIP 0                  |           |           |            |
| 2745 |   | IFA   | CHIP CONDUCTOR   |     | FB8003  | 1-216-864-11 | SHORT CHIP 0                  |           |           |            |
| 2746 |   | IFA   | CHIP CONDUCTOR   |     | FB8004  | 1-216-864-11 | SHORT CHIP 0                  |           |           |            |
| 2747 |   | IFA   | CHIP CONDUCTOR   |     | FB8005  | 1-216-864-11 | SHORT CHIP 0                  |           |           |            |
| 2748 |   | IFA   | CHIP CONDUCTOR   |     | FB8006  | 1-216-864-11 | SHORT CHIP 0                  |           |           |            |
| 2749 |   | IFA   | CHIP CONDUCTOR   |     | FB8007  | 1-216-864-11 | SHORT CHIP 0                  |           |           |            |
| 2750 |   | IFA   | CHIP CONDUCTOR   |     | FB8008  | 1-216-864-11 | SHORT CHIP 0                  |           |           |            |
| 2751 |   | IFA   | CHIP CONDUCTOR   |     | FB8009  | 1-216-864-11 | SHORT CHIP 0                  |           |           |            |
| 2752 |   | IFA   | CHIP CONDUCTOR   |     | FB8011  | 1-216-864-11 | SHORT CHIP 0                  |           |           |            |



| No.  | # | Board | Type           | △/* | Ref.No. | Part No.     | Descrption                       | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------------|-----|---------|--------------|----------------------------------|-----------|-----------|------------|
| 2753 |   | IFA   | CHIP CONDUCTOR |     | FB8012  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2754 |   | IFA   | CHIP CONDUCTOR |     | FB8013  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2755 |   | IFA   | CHIP CONDUCTOR |     | FB8014  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2756 |   | IFA   | CHIP CONDUCTOR |     | FB8015  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2757 |   | IFA   | CHIP CONDUCTOR |     | FB8016  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2758 |   | IFA   | CHIP CONDUCTOR |     | FB8017  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2759 |   | IFA   | CHIP CONDUCTOR |     | FB8018  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2760 |   | IFA   | CHIP CONDUCTOR |     | FB8062  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2761 |   | IFA   | CHIP CONDUCTOR |     | FB8063  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2762 |   | IFA   | CHIP CONDUCTOR |     | FB8064  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2763 |   | IFA   | CHIP CONDUCTOR |     | FB8065  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2764 |   | IFA   | CHIP CONDUCTOR |     | FB8066  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2765 |   | IFA   | CHIP CONDUCTOR |     | FB8067  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2766 |   | IFA   | CHIP CONDUCTOR |     | FB8068  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2767 |   | IFA   | CHIP CONDUCTOR |     | FB8069  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2768 |   | IFA   | CHIP CONDUCTOR |     | FB8070  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2769 |   | IFA   | CHIP CONDUCTOR |     | FB8071  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2770 |   | IFA   | CHIP CONDUCTOR |     | FB8072  | 1-216-864-11 | SHORT CHIP 0                     |           |           |            |
| 2771 |   | IFA   | IC             |     | IC8001  | 8-759-520-49 | IC PQ30RV21                      |           |           |            |
| 2772 |   | IFA   | IC             |     | IC8002  | 8-759-459-99 | IC PQ09RD11                      |           |           |            |
| 2773 |   | IFA   | CHIP CONDUCTOR |     | JR8001  | 1-216-295-91 | SHORT CHIP 0                     |           |           |            |
| 2774 |   | IFA   | CHIP CONDUCTOR |     | JR8002  | 1-216-295-91 | SHORT CHIP 0                     |           |           |            |
| 2775 |   | IFA   | RESISTOR       |     | R8002   | 1-218-684-11 | METAL CHIP 470 0.5% 1/10W        |           |           |            |
| 2776 |   | IFA   | RESISTOR       |     | R8003   | 1-218-696-11 | METAL CHIP 1.5K 0.5% 1/10W       |           |           |            |
| 2777 |   | AD    | CAPACITOR      |     | C4004   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 2778 |   | AD    | CAPACITOR      |     | C4005   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 2779 |   | AD    | CAPACITOR      |     | C4024   | 1-126-204-11 | ELECT CHIP 47UF 20.00% 16V       |           |           |            |
| 2780 |   | AD    | CAPACITOR      |     | C4025   | 1-162-974-11 | CERAMIC CHIP 0.01UF 50V          |           |           |            |
| 2781 |   | AD    | CAPACITOR      |     | C4032   | 1-164-346-11 | CERAMIC CHIP 1UF 16V             |           |           |            |
| 2782 |   | AD    | CAPACITOR      |     | C4033   | 1-164-346-11 | CERAMIC CHIP 1UF 16V             |           |           |            |
| 2783 |   | AD    | CAPACITOR      |     | C4039   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 2784 |   | AD    | CAPACITOR      |     | C4042   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 2785 |   | AD    | CAPACITOR      |     | C4043   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 2786 |   | AD    | CAPACITOR      |     | C4044   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V        |           |           |            |
| 2787 |   | AD    | CAPACITOR      |     | C4045   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2788 |   | AD    | CAPACITOR      |     | C4046   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V        |           |           |            |
| 2789 |   | AD    | CAPACITOR      |     | C4048   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 2790 |   | AD    | CAPACITOR      |     | C4049   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2791 |   | AD    | CAPACITOR      |     | C4051   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 2792 |   | AD    | CAPACITOR      |     | C4052   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V        |           |           |            |
| 2793 |   | AD    | CAPACITOR      |     | C4064   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 2794 |   | AD    | CAPACITOR      |     | C4067   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V        |           |           |            |
| 2795 |   | AD    | CAPACITOR      |     | C4071   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |

| No.  | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                       | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-----|---------|--------------|----------------------------------|-----------|-----------|------------|
| 2796 |   | AD    | CAPACITOR |     | C4072   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 2797 |   | AD    | CAPACITOR |     | C4073   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 2798 |   | AD    | CAPACITOR |     | C4074   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 2799 |   | AD    | CAPACITOR |     | C4075   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 2800 |   | AD    | CAPACITOR |     | C4076   | 1-162-966-11 | CERAMIC CHIP 0.0022UF 10.00% 50V |           |           |            |
| 2801 |   | AD    | CAPACITOR |     | C4201   | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V         |           |           |            |
| 2802 |   | AD    | CAPACITOR |     | C4202   | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V         |           |           |            |
| 2803 |   | AD    | CAPACITOR |     | C4203   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2804 |   | AD    | CAPACITOR |     | C4204   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 2805 |   | AD    | CAPACITOR |     | C4205   | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V         |           |           |            |
| 2806 |   | AD    | CAPACITOR |     | C4206   | 1-127-573-11 | CERAMIC CHIP 1UF 10% 16V         |           |           |            |
| 2807 |   | AD    | CAPACITOR |     | C4207   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V    |           |           |            |
| 2808 |   | AD    | CAPACITOR |     | C4208   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2809 |   | AD    | CAPACITOR |     | C4301   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 2810 |   | AD    | CAPACITOR |     | C4302   | 1-126-193-11 | ELECT CHIP 1UF 20.00% 50V        |           |           |            |
| 2811 |   | AD    | CAPACITOR |     | C4303   | 1-164-360-11 | CERAMIC CHIP 0.1UF 16V           |           |           |            |
| 2812 |   | AD    | CAPACITOR |     | C4304   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 2813 |   | AD    | CAPACITOR |     | C4305   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2814 |   | AD    | CAPACITOR |     | C4306   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2815 |   | AD    | CAPACITOR |     | C4307   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2816 |   | AD    | CAPACITOR |     | C4308   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V        |           |           |            |
| 2817 |   | AD    | CAPACITOR |     | C4314   | 1-128-357-11 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2818 |   | AD    | CAPACITOR |     | C4316   | 1-128-357-11 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2819 |   | AD    | CAPACITOR |     | C4317   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2820 |   | AD    | CAPACITOR |     | C4318   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2821 |   | AD    | CAPACITOR |     | C4319   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2822 |   | AD    | CAPACITOR |     | C4320   | 1-128-357-11 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2823 |   | AD    | CAPACITOR |     | C4321   | 1-128-357-11 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2824 |   | AD    | CAPACITOR |     | C4322   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V        |           |           |            |
| 2825 |   | AD    | CAPACITOR |     | C4324   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V        |           |           |            |
| 2826 |   | AD    | CAPACITOR |     | C4338   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 2827 |   | AD    | CAPACITOR |     | C4340   | 1-128-357-11 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2828 |   | AD    | CAPACITOR |     | C4341   | 1-128-357-11 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2829 |   | AD    | CAPACITOR |     | C4344   | 1-115-156-11 | CERAMIC CHIP 1UF 10V             |           |           |            |
| 2830 |   | AD    | CAPACITOR |     | C4345   | 1-162-974-11 | CERAMIC CHIP 0.01UF 50V          |           |           |            |
| 2831 |   | AD    | CAPACITOR |     | C4346   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V        |           |           |            |
| 2832 |   | AD    | CAPACITOR |     | C4347   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V        |           |           |            |
| 2833 |   | AD    | CAPACITOR |     | C4348   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2834 |   | AD    | CAPACITOR |     | C4349   | 1-110-530-11 | ELECT CHIP 1000UF 20.00% 6.3V    |           |           |            |
| 2835 |   | AD    | CAPACITOR |     | C4350   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V       |           |           |            |
| 2836 |   | AD    | CAPACITOR |     | C4351   | 1-110-530-11 | ELECT CHIP 1000UF 20.00% 6.3V    |           |           |            |
| 2837 |   | AD    | CAPACITOR |     | C4352   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V      |           |           |            |
| 2838 |   | AD    | CAPACITOR |     | C4353   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V        |           |           |            |

| No.  | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                     | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-----|---------|--------------|--------------------------------|-----------|-----------|------------|
| 2839 |   | AD    | CAPACITOR |     | C4354   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V  |           |           |            |
| 2840 |   | AD    | CAPACITOR |     | C4355   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V      |           |           |            |
| 2841 |   | AD    | CAPACITOR |     | C4356   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V    |           |           |            |
| 2842 |   | AD    | CAPACITOR |     | C4358   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2843 |   | AD    | CAPACITOR |     | C4359   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2844 |   | AD    | CAPACITOR |     | C4363   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V    |           |           |            |
| 2845 |   | AD    | CAPACITOR |     | C4364   | 1-126-603-11 | ELECT CHIP 4.7UF 20.00% 35V    |           |           |            |
| 2846 |   | AD    | CAPACITOR |     | C4365   | 1-127-715-91 | CERAMIC CHIP 0.22UF 10% 16V    |           |           |            |
| 2847 |   | AD    | CAPACITOR |     | C4368   | 1-164-230-11 | CERAMIC CHIP 220PF 5.00% 50V   |           |           |            |
| 2848 |   | AD    | CAPACITOR |     | C4369   | 1-164-230-11 | CERAMIC CHIP 220PF 5.00% 50V   |           |           |            |
| 2849 |   | AD    | CAPACITOR |     | C4376   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2850 |   | AD    | CAPACITOR |     | C4377   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2851 |   | AD    | CAPACITOR |     | C4511   | 1-117-681-11 | ELECT CHIP 100UF 20.00% 16V    |           |           |            |
| 2852 |   | AD    | CAPACITOR |     | C4512   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2853 |   | AD    | CAPACITOR |     | C4513   | 1-162-921-11 | CERAMIC CHIP 33PF 5.00% 50V    |           |           |            |
| 2854 |   | AD    | CAPACITOR |     | C4514   | 1-164-346-11 | CERAMIC CHIP 1UF 16V           |           |           |            |
| 2855 |   | AD    | CAPACITOR |     | C4515   | 1-164-346-11 | CERAMIC CHIP 1UF 16V           |           |           |            |
| 2856 |   | AD    | CAPACITOR |     | C4516   | 1-164-346-11 | CERAMIC CHIP 1UF 16V           |           |           |            |
| 2857 |   | AD    | CAPACITOR |     | C4517   | 1-164-360-11 | CERAMIC CHIP 0.1UF 16V         |           |           |            |
| 2858 |   | AD    | CAPACITOR |     | C4518   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2859 |   | AD    | CAPACITOR |     | C4520   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2860 |   | AD    | CAPACITOR |     | C4521   | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V |           |           |            |
| 2861 |   | AD    | CAPACITOR |     | C4522   | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V |           |           |            |
| 2862 |   | AD    | CAPACITOR |     | C4523   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2863 |   | AD    | CAPACITOR |     | C4524   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2864 |   | AD    | CAPACITOR |     | C4525   | 1-164-360-11 | CERAMIC CHIP 0.1UF 16V         |           |           |            |
| 2865 |   | AD    | CAPACITOR |     | C4526   | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V |           |           |            |
| 2866 |   | AD    | CAPACITOR |     | C4527   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2867 |   | AD    | CAPACITOR |     | C4528   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2868 |   | AD    | CAPACITOR |     | C4529   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2869 |   | AD    | CAPACITOR |     | C4530   | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V |           |           |            |
| 2870 |   | AD    | CAPACITOR |     | C4531   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2871 |   | AD    | CAPACITOR |     | C4532   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2872 |   | AD    | CAPACITOR |     | C4533   | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V |           |           |            |
| 2873 |   | AD    | CAPACITOR |     | C4534   | 1-164-360-11 | CERAMIC CHIP 0.1UF 16V         |           |           |            |
| 2874 |   | AD    | CAPACITOR |     | C4535   | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V |           |           |            |
| 2875 |   | AD    | CAPACITOR |     | C4536   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2876 |   | AD    | CAPACITOR |     | C4537   | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V |           |           |            |
| 2877 |   | AD    | CAPACITOR |     | C4538   | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V |           |           |            |
| 2878 |   | AD    | CAPACITOR |     | C4539   | 1-109-982-11 | CERAMIC CHIP 1UF 10.00% 10V    |           |           |            |
| 2879 |   | AD    | CAPACITOR |     | C4540   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2880 |   | AD    | CAPACITOR |     | C4541   | 1-126-206-11 | ELECT CHIP 100UF 20.00% 6.3V   |           |           |            |
| 2881 |   | AD    | CAPACITOR |     | C4542   | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V |           |           |            |

| No.  | # | Board | Type      | △ / * | Ref.No. | Part No.     | Descrption                     | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-------|---------|--------------|--------------------------------|-----------|-----------|------------|
| 2882 |   | AD    | CAPACITOR |       | C4543   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2883 |   | AD    | CAPACITOR |       | C4544   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2884 |   | AD    | CAPACITOR |       | C4545   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2885 |   | AD    | CAPACITOR |       | C4546   | 1-125-891-11 | CERAMIC CHIP 0.47UF 10.00% 10V |           |           |            |
| 2886 |   | AD    | CAPACITOR |       | C4548   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2887 |   | AD    | CAPACITOR |       | C4549   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2888 |   | AD    | CAPACITOR |       | C4550   | 1-125-837-91 | CERAMIC CHIP 1UF 10% 6.3V      |           |           |            |
| 2889 |   | AD    | CAPACITOR |       | C4551   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V  |           |           |            |
| 2890 |   | AD    | CAPACITOR |       | C4552   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V  |           |           |            |
| 2891 |   | AD    | CAPACITOR |       | C4555   | 1-164-360-11 | CERAMIC CHIP 0.1UF 16V         |           |           |            |
| 2892 |   | AD    | CAPACITOR |       | C4556   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2893 |   | AD    | CAPACITOR |       | C7001   | 1-126-395-11 | ELECT CHIP 22UF 20.00% 16V     |           |           |            |
| 2894 |   | AD    | CAPACITOR |       | C7002   | 1-162-917-11 | CERAMIC CHIP 15PF 5.00% 50V    |           |           |            |
| 2895 |   | AD    | CAPACITOR |       | C7004   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2896 |   | AD    | CAPACITOR |       | C7005   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2897 |   | AD    | CAPACITOR |       | C7006   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2898 |   | AD    | CAPACITOR |       | C7007   | 1-162-917-11 | CERAMIC CHIP 15PF 5.00% 50V    |           |           |            |
| 2899 |   | AD    | CAPACITOR |       | C7008   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2900 |   | AD    | CAPACITOR |       | C7010   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2901 |   | AD    | CAPACITOR |       | C7011   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2902 |   | AD    | CAPACITOR |       | C7012   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2903 |   | AD    | CAPACITOR |       | C7013   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2904 |   | AD    | CAPACITOR |       | C7014   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2905 |   | AD    | CAPACITOR |       | C7015   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2906 |   | AD    | CAPACITOR |       | C7016   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2907 |   | AD    | CAPACITOR |       | C7017   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2908 |   | AD    | CAPACITOR |       | C7018   | 1-162-923-11 | CERAMIC CHIP 47PF 5.00% 50V    |           |           |            |
| 2909 |   | AD    | CAPACITOR |       | C7019   | 1-162-923-11 | CERAMIC CHIP 47PF 5.00% 50V    |           |           |            |
| 2910 |   | AD    | CAPACITOR |       | C7020   | 1-162-923-11 | CERAMIC CHIP 47PF 5.00% 50V    |           |           |            |
| 2911 |   | AD    | CAPACITOR |       | C7021   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2912 |   | AD    | CAPACITOR |       | C7022   | 1-115-416-11 | CERAMIC CHIP 0.001UF 5.00% 25V |           |           |            |
| 2913 |   | AD    | CAPACITOR |       | C7023   | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V   |           |           |            |
| 2914 |   | AD    | CAPACITOR |       | C7024   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2915 |   | AD    | CAPACITOR |       | C7025   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2916 |   | AD    | CAPACITOR |       | C7026   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2917 |   | AD    | CAPACITOR |       | C7027   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2918 |   | AD    | CAPACITOR |       | C7028   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2919 |   | AD    | CAPACITOR |       | C7029   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2920 |   | AD    | CAPACITOR |       | C7030   | 1-162-927-11 | CERAMIC CHIP 100PF 5.00% 50V   |           |           |            |
| 2921 |   | AD    | CAPACITOR |       | C7031   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2922 |   | AD    | CAPACITOR |       | C7032   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2923 |   | AD    | CAPACITOR |       | C7033   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2924 |   | AD    | CAPACITOR |       | C7034   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |

| No.  | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                     | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-----|---------|--------------|--------------------------------|-----------|-----------|------------|
| 2925 |   | AD    | CAPACITOR |     | C7035   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2926 |   | AD    | CAPACITOR |     | C7036   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2927 |   | AD    | CAPACITOR |     | C7037   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2928 |   | AD    | CAPACITOR |     | C7038   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2929 |   | AD    | CAPACITOR |     | C7039   | 1-126-395-11 | ELECT CHIP 22UF 20.00% 16V     |           |           |            |
| 2930 |   | AD    | CAPACITOR |     | C7040   | 1-162-921-11 | CERAMIC CHIP 33PF 5.00% 50V    |           |           |            |
| 2931 |   | AD    | CAPACITOR |     | C7041   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2932 |   | AD    | CAPACITOR |     | C7042   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2933 |   | AD    | CAPACITOR |     | C7043   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2934 |   | AD    | CAPACITOR |     | C7044   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2935 |   | AD    | CAPACITOR |     | C7045   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2936 |   | AD    | CAPACITOR |     | C7046   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2937 |   | AD    | CAPACITOR |     | C7047   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2938 |   | AD    | CAPACITOR |     | C7048   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2939 |   | AD    | CAPACITOR |     | C7049   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2940 |   | AD    | CAPACITOR |     | C7050   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2941 |   | AD    | CAPACITOR |     | C7051   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2942 |   | AD    | CAPACITOR |     | C7052   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2943 |   | AD    | CAPACITOR |     | C7053   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2944 |   | AD    | CAPACITOR |     | C7054   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2945 |   | AD    | CAPACITOR |     | C7056   | 1-126-395-11 | ELECT CHIP 22UF 20.00% 16V     |           |           |            |
| 2946 |   | AD    | CAPACITOR |     | C7057   | 1-162-921-11 | CERAMIC CHIP 33PF 5.00% 50V    |           |           |            |
| 2947 |   | AD    | CAPACITOR |     | C7058   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2948 |   | AD    | CAPACITOR |     | C7059   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2949 |   | AD    | CAPACITOR |     | C7060   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2950 |   | AD    | CAPACITOR |     | C7061   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2951 |   | AD    | CAPACITOR |     | C7062   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2952 |   | AD    | CAPACITOR |     | C7064   | 1-126-395-11 | ELECT CHIP 22UF 20.00% 16V     |           |           |            |
| 2953 |   | AD    | CAPACITOR |     | C7065   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2954 |   | AD    | CAPACITOR |     | C7066   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2955 |   | AD    | CAPACITOR |     | C7067   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2956 |   | AD    | CAPACITOR |     | C7068   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2957 |   | AD    | CAPACITOR |     | C7069   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2958 |   | AD    | CAPACITOR |     | C7070   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2959 |   | AD    | CAPACITOR |     | C7071   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2960 |   | AD    | CAPACITOR |     | C7072   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 2961 |   | AD    | CAPACITOR |     | C7073   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2962 |   | AD    | CAPACITOR |     | C7074   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2963 |   | AD    | CAPACITOR |     | C7075   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 2964 |   | AD    | CAPACITOR |     | C7078   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2965 |   | AD    | CAPACITOR |     | C7079   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2966 |   | AD    | CAPACITOR |     | C7082   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 2967 |   | AD    | CONNECTOR |     | CN4001  | 1-817-097-21 | PIN, CONNECTOR (1.5MM)(SMD)13P |           |           |            |

| No.  | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                          | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-----|---------|--------------|-------------------------------------|-----------|-----------|------------|
| 2968 |   | AD    | CONNECTOR |     | CN4002  | 1-794-052-21 | FFC/FPC CONNECTOR (LIF(NON-ZIF))32P |           |           |            |
| 2969 |   | AD    | CONNECTOR |     | CN4003  | 1-779-339-21 | CONNECTOR, FFC/FPC 30P              |           |           |            |
| 2970 |   | AD    | CONNECTOR |     | CN4004  | 1-779-334-11 | CONNECTOR, FFC/FPC 20P              |           |           |            |
| 2971 |   | AD    | CONNECTOR |     | CN4005  | 1-816-374-21 | CONNECTOR, FFC/FPC 40P              |           |           |            |
| 2972 |   | AD    | CONNECTOR |     | CN4301  | 1-779-329-11 | CONNECTOR, FFC/FPC 10P              |           |           |            |
| 2973 |   | AD    | CONNECTOR | *   | CN4306  | 1-793-798-21 | CONNECTOR, BOARD TO BOARD 50P       |           |           |            |
| 2974 |   | AD    | CONNECTOR |     | CN4501  | 1-779-338-11 | CONNECTOR, FFC/FPC 28P              |           |           |            |
| 2975 |   | AD    | CONNECTOR |     | CN7001  | 1-816-228-11 | CONNECTOR, DVI                      |           |           |            |
| 2976 |   | AD    | CONNECTOR | *   | CN7004  | 1-564-507-11 | PLUG, CONNECTOR 4P                  |           |           |            |
| 2977 |   | AD    | DIODE     |     | D4007   | 8-719-081-97 | DIODE MMDL914T1                     |           |           |            |
| 2978 |   | AD    | DIODE     |     | D4301   | 8-719-914-44 | DIODE DAP202K                       |           |           |            |
| 2979 |   | AD    | DIODE     |     | D4302   | 8-719-041-97 | DIODE MA113-(TX)                    |           |           |            |
| 2980 |   | AD    | DIODE     |     | D4303   | 8-719-404-50 | DIODE MA111-TX                      |           |           |            |
| 2981 |   | AD    | DIODE     |     | D4309   | 8-719-914-43 | DIODE DAN202K                       |           |           |            |
| 2982 |   | AD    | DIODE     |     | D4311   | 8-719-977-28 | DIODE DTZ10B                        |           |           |            |
| 2983 |   | AD    | DIODE     |     | D4312   | 8-719-083-79 | DIODE MM3Z10VT1                     |           |           |            |
| 2984 |   | AD    | DIODE     |     | D4313   | 8-719-083-79 | DIODE MM3Z10VT1                     |           |           |            |
| 2985 |   | AD    | DIODE     |     | D4315   | 8-719-041-97 | DIODE MA113-(TX)                    |           |           |            |
| 2986 |   | AD    | DIODE     |     | D4317   | 8-719-050-37 | DIODE M1MA152WA-T1                  |           |           |            |
| 2987 |   | AD    | DIODE     |     | D4319   | 8-719-041-97 | DIODE MA113-(TX)                    |           |           |            |
| 2988 |   | AD    | DIODE     |     | D4320   | 8-719-081-97 | DIODE MMDL914T1                     |           |           |            |
| 2989 |   | AD    | DIODE     |     | D4401   | 8-719-041-97 | DIODE MA113-(TX)                    |           |           |            |
| 2990 |   | AD    | DIODE     |     | D7001   | 8-719-914-43 | DIODE DAN202K                       |           |           |            |
| 2991 |   | AD    | DIODE     |     | D7002   | 8-719-069-55 | DIODE UDZSTE-175.6B                 |           |           |            |
| 2992 |   | AD    | DIODE     |     | D7003   | 8-719-069-55 | DIODE UDZSTE-175.6B                 |           |           |            |
| 2993 |   | AD    | DIODE     |     | D7004   | 8-719-069-55 | DIODE UDZSTE-175.6B                 |           |           |            |
| 2994 |   | AD    | DIODE     |     | D7005   | 8-719-977-28 | DIODE DTZ10B                        |           |           |            |
| 2995 |   | AD    | DIODE     |     | D7006   | 8-719-977-28 | DIODE DTZ10B                        |           |           |            |
| 2996 |   | AD    | DIODE     |     | D7007   | 8-719-069-55 | DIODE UDZSTE-175.6B                 |           |           |            |
| 2997 |   | AD    | DIODE     |     | D7008   | 8-719-069-55 | DIODE UDZSTE-175.6B                 |           |           |            |
| 2998 |   | AD    | DIODE     |     | D7009   | 8-719-069-55 | DIODE UDZSTE-175.6B                 |           |           |            |
| 2999 |   | AD    | FERRITE   |     | FB4501  | 1-414-228-11 | FERRITE 0UH                         |           |           |            |
| 3000 |   | AD    | FERRITE   |     | FB4502  | 1-414-228-11 | FERRITE 0UH                         |           |           |            |
| 3001 |   | AD    | FERRITE   |     | FB4503  | 1-414-228-11 | FERRITE 0UH                         |           |           |            |
| 3002 |   | AD    | FERRITE   |     | FB4504  | 1-216-864-11 | SHORT CHIP 0                        |           |           |            |
| 3003 |   | AD    | FERRITE   |     | FB4505  | 1-216-864-11 | SHORT CHIP 0                        |           |           |            |
| 3004 |   | AD    | FERRITE   |     | FB4507  | 1-414-228-11 | FERRITE 0UH                         |           |           |            |
| 3005 |   | AD    | FERRITE   |     | FB4508  | 1-469-179-21 | FERRITE 0UH                         |           |           |            |
| 3006 |   | AD    | FERRITE   |     | FB4509  | 1-469-179-21 | FERRITE 0UH                         |           |           |            |
| 3007 |   | AD    | FERRITE   |     | FB4510  | 1-408-603-31 | INDUCTOR 10UH                       |           |           |            |
| 3008 |   | AD    | FERRITE   |     | FB7001  | 1-414-760-21 | FERRITE 0UH                         |           |           |            |
| 3009 |   | AD    | FERRITE   |     | FB7002  | 1-414-760-21 | FERRITE 0UH                         |           |           |            |
| 3010 |   | AD    | FERRITE   |     | FB7003  | 1-414-760-21 | FERRITE 0UH                         |           |           |            |

| No.  | # | Board | Type       | △ / * | Ref.No. | Part No.     | Descrption                  | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|------------|-------|---------|--------------|-----------------------------|-----------|-----------|------------|
| 3011 |   | AD    | FERRITE    |       | FB7004  | 1-414-760-21 | FERRITE 0UH                 |           |           |            |
| 3012 |   | AD    | FERRITE    |       | FB7005  | 1-469-836-21 | FERRITE 0UH                 |           |           |            |
| 3013 |   | AD    | FERRITE    |       | FB7006  | 1-469-836-21 | FERRITE 0UH                 |           |           |            |
| 3014 |   | AD    | FERRITE    |       | FB7007  | 1-414-760-21 | FERRITE 0UH                 |           |           |            |
| 3015 |   | AD    | FERRITE    |       | FB7008  | 1-414-760-21 | FERRITE 0UH                 |           |           |            |
| 3016 |   | AD    | FILTER     |       | FL4150  | 1-234-558-21 | FILTER, LOW PASS            |           |           |            |
| 3017 |   | AD    | FILTER     |       | FL4151  | 1-234-558-21 | FILTER, LOW PASS            |           |           |            |
| 3018 |   | AD    | FILTER     |       | FL4501  | 1-234-557-21 | FILTER, LOW PASS            |           |           |            |
| 3019 |   | AD    | FILTER     |       | FL4502  | 1-234-557-21 | FILTER, LOW PASS            |           |           |            |
| 3020 |   | AD    | FILTER     |       | FL7002  | 1-234-560-21 | FILTER, LOW PASS            |           |           |            |
| 3021 |   | AD    | FILTER     |       | FL7003  | 1-234-559-21 | FILTER, LOW PASS            |           |           |            |
| 3022 |   | AD    | FILTER     |       | FL7004  | 1-234-559-21 | FILTER, LOW PASS            |           |           |            |
| 3023 |   | AD    | IC         |       | IC4001  | 8-752-080-04 | IC CXA2069Q                 |           |           |            |
| 3024 |   | AD    | IC         |       | IC4301  | 8-759-278-58 | IC NJM4558V-TE2             |           |           |            |
| 3025 |   | AD    | IC         |       | IC4303  | 8-752-080-04 | IC CXA2069Q                 |           |           |            |
| 3026 |   | AD    | IC         |       | IC4306  | 8-759-683-07 | IC BA7622F-E2               |           |           |            |
| 3027 |   | AD    | IC         |       | IC4307  | 8-759-278-58 | IC NJM4558V-TE2             |           |           |            |
| 3028 |   | AD    | IC         |       | IC4501  | 8-752-103-44 | IC CXA2171Q                 |           |           |            |
| 3029 |   | AD    | IC         |       | IC4502  | 8-759-548-56 | IC M52055FP                 |           |           |            |
| 3030 |   | AD    | IC         |       | IC4503  | 8-759-687-14 | IC MAX4451EKA-TG069         |           |           |            |
| 3031 |   | AD    | IC         |       | IC4504  | 8-759-660-21 | IC SN74HCT02APWR            |           |           |            |
| 3032 |   | AD    | IC         |       | IC7001  | 8-759-640-39 | IC BR24C02F-WE2             |           |           |            |
| 3033 |   | AD    | IC         |       | IC7002  | 8-749-015-18 | IC PQ07VZ012ZP              |           |           |            |
| 3034 |   | AD    | IC         |       | IC7003  | 8-749-015-18 | IC PQ07VZ012ZP              |           |           |            |
| 3035 |   | AD    | IC         |       | IC7004  | 6-702-080-01 | IC GM7030-H                 |           |           |            |
| 3036 |   | AD    | IC         |       | IC7005  | 6-802-346-01 | IC ST72631K4M1/NNLTR        |           |           |            |
| 3037 |   | AD    | IC         |       | IC7006  | 8-759-641-86 | IC BR24C16F-E2              |           |           |            |
| 3038 |   | AD    | IC         |       | IC7007  | 6-702-170-01 | IC PACDN006S                |           |           |            |
| 3039 |   | AD    | IC         |       | IC7008  | 6-702-170-01 | IC PACDN006S                |           |           |            |
| 3040 |   | AD    | IC         |       | IC7009  | 6-702-170-01 | IC PACDN006S                |           |           |            |
| 3041 |   | AD    | SOCKET     |       | J7001   | 1-794-623-11 | JACK, PIN 2P                |           |           |            |
| 3042 |   | AD    | COIL       |       | L4501   | 1-469-856-21 | INDUCTOR 10UH               |           |           |            |
| 3043 |   | AD    | COIL       |       | L4502   | 1-412-058-11 | INDUCTOR 10UH               |           |           |            |
| 3044 |   | AD    | COIL       |       | L4503   | 1-412-058-11 | INDUCTOR 10UH               |           |           |            |
| 3045 |   | AD    | COIL       |       | L4504   | 1-412-058-11 | INDUCTOR 10UH               |           |           |            |
| 3046 |   | AD    | COIL       |       | L4505   | 1-469-856-21 | INDUCTOR 10UH               |           |           |            |
| 3047 |   | AD    | COIL       |       | L7001   | 1-412-056-11 | INDUCTOR 4.7UH              |           |           |            |
| 3048 |   | AD    | COIL       |       | L7002   | 1-412-058-11 | INDUCTOR 10UH               |           |           |            |
| 3049 |   | AD    | TRANSISTOR |       | Q4005   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3050 |   | AD    | TRANSISTOR |       | Q4006   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3051 |   | AD    | TRANSISTOR |       | Q4009   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3052 |   | AD    | TRANSISTOR |       | Q4010   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3053 |   | AD    | TRANSISTOR |       | Q4011   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |

| No.  | # | Board | Type       | △/* | Ref.No. | Part No.     | Descrption                  | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|------------|-----|---------|--------------|-----------------------------|-----------|-----------|------------|
| 3054 |   | AD    | TRANSISTOR |     | Q4012   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 3055 |   | AD    | TRANSISTOR |     | Q4013   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 3056 |   | AD    | TRANSISTOR |     | Q4014   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 3057 |   | AD    | TRANSISTOR |     | Q4201   | 8-729-010-25 | TRANSISTOR MSD601-RT1       |           |           |            |
| 3058 |   | AD    | TRANSISTOR |     | Q4202   | 8-729-010-25 | TRANSISTOR MSD601-RT1       |           |           |            |
| 3059 |   | AD    | TRANSISTOR |     | Q4301   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3060 |   | AD    | TRANSISTOR |     | Q4302   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 3061 |   | AD    | TRANSISTOR |     | Q4303   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 3062 |   | AD    | TRANSISTOR |     | Q4305   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 3063 |   | AD    | TRANSISTOR |     | Q4308   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 3064 |   | AD    | TRANSISTOR |     | Q4309   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 3065 |   | AD    | TRANSISTOR |     | Q4310   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 3066 |   | AD    | TRANSISTOR |     | Q4312   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3067 |   | AD    | TRANSISTOR |     | Q4313   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 3068 |   | AD    | TRANSISTOR |     | Q4314   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 3069 |   | AD    | TRANSISTOR |     | Q4315   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 3070 |   | AD    | TRANSISTOR |     | Q4316   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 3071 |   | AD    | TRANSISTOR |     | Q4320   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 3072 |   | AD    | TRANSISTOR |     | Q4321   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3073 |   | AD    | TRANSISTOR |     | Q4401   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3074 |   | AD    | TRANSISTOR |     | Q4501   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 3075 |   | AD    | TRANSISTOR |     | Q4502   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 3076 |   | AD    | TRANSISTOR |     | Q4503   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 3077 |   | AD    | TRANSISTOR |     | Q4504   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3078 |   | AD    | TRANSISTOR |     | Q4505   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3079 |   | AD    | TRANSISTOR |     | Q4506   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3080 |   | AD    | TRANSISTOR |     | Q4507   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3081 |   | AD    | TRANSISTOR |     | Q4508   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3082 |   | AD    | TRANSISTOR |     | Q4509   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3083 |   | AD    | TRANSISTOR |     | Q4510   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 3084 |   | AD    | TRANSISTOR |     | Q4511   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 3085 |   | AD    | TRANSISTOR |     | Q4512   | 8-729-905-35 | TRANSISTOR 2SC4081-R        |           |           |            |
| 3086 |   | AD    | TRANSISTOR |     | Q4513   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3087 |   | AD    | TRANSISTOR |     | Q4514   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3088 |   | AD    | TRANSISTOR |     | Q4515   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3089 |   | AD    | TRANSISTOR |     | Q4516   | 8-729-026-53 | TRANSISTOR 2SA1576A-T106-QR |           |           |            |
| 3090 |   | AD    | TRANSISTOR |     | Q4519   | 8-729-907-00 | TRANSISTOR DTC114EU         |           |           |            |
| 3091 |   | AD    | RESISTOR   |     | R4005   | 1-216-809-11 | METAL CHIP 100 5% 1/10W     |           |           |            |
| 3092 |   | AD    | RESISTOR   |     | R4029   | 1-218-686-11 | METAL CHIP 560 0.5% 1/10W   |           |           |            |
| 3093 |   | AD    | RESISTOR   |     | R4030   | 1-218-686-11 | METAL CHIP 560 0.5% 1/10W   |           |           |            |
| 3094 |   | AD    | RESISTOR   |     | R4034   | 1-218-710-11 | METAL CHIP 5.6K 0.5% 1/10W  |           |           |            |
| 3095 |   | AD    | RESISTOR   |     | R4035   | 1-218-710-11 | METAL CHIP 5.6K 0.5% 1/10W  |           |           |            |
| 3096 |   | AD    | RESISTOR   |     | R4037   | 1-216-809-11 | METAL CHIP 100 5% 1/10W     |           |           |            |



| No.  | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption                 | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|-----|---------|--------------|----------------------------|-----------|-----------|------------|
| 3097 |   | AD    | RESISTOR |     | R4038   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3098 |   | AD    | RESISTOR |     | R4039   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 3099 |   | AD    | RESISTOR |     | R4040   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 3100 |   | AD    | RESISTOR |     | R4044   | 1-216-805-11 | METAL CHIP 47 5% 1/10W     |           |           |            |
| 3101 |   | AD    | RESISTOR |     | R4045   | 1-216-805-11 | METAL CHIP 47 5% 1/10W     |           |           |            |
| 3102 |   | AD    | RESISTOR |     | R4057   | 1-218-692-11 | METAL CHIP 1K 0.5% 1/10W   |           |           |            |
| 3103 |   | AD    | RESISTOR |     | R4058   | 1-218-692-11 | METAL CHIP 1K 0.5% 1/10W   |           |           |            |
| 3104 |   | AD    | RESISTOR |     | R4059   | 1-218-695-11 | METAL CHIP 1.3K 0.5% 1/10W |           |           |            |
| 3105 |   | AD    | RESISTOR |     | R4060   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 3106 |   | AD    | RESISTOR |     | R4061   | 1-218-695-11 | METAL CHIP 1.3K 0.5% 1/10W |           |           |            |
| 3107 |   | AD    | RESISTOR |     | R4062   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3108 |   | AD    | RESISTOR |     | R4063   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3109 |   | AD    | RESISTOR |     | R4064   | 1-216-041-00 | RES-CHIP 470 5% 1/10W      |           |           |            |
| 3110 |   | AD    | RESISTOR |     | R4065   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3111 |   | AD    | RESISTOR |     | R4066   | 1-216-049-11 | RES-CHIP 1K 5% 1/10W       |           |           |            |
| 3112 |   | AD    | RESISTOR |     | R4067   | 1-216-041-00 | RES-CHIP 470 5% 1/10W      |           |           |            |
| 3113 |   | AD    | RESISTOR |     | R4068   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3114 |   | AD    | RESISTOR |     | R4069   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3115 |   | AD    | RESISTOR |     | R4070   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3116 |   | AD    | RESISTOR |     | R4071   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3117 |   | AD    | RESISTOR |     | R4072   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3118 |   | AD    | RESISTOR |     | R4073   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3119 |   | AD    | RESISTOR |     | R4075   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3120 |   | AD    | RESISTOR |     | R4076   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3121 |   | AD    | RESISTOR |     | R4078   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3122 |   | AD    | RESISTOR |     | R4079   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3123 |   | AD    | RESISTOR |     | R4080   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3124 |   | AD    | RESISTOR |     | R4081   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3125 |   | AD    | RESISTOR |     | R4082   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3126 |   | AD    | RESISTOR |     | R4084   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3127 |   | AD    | RESISTOR |     | R4085   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3128 |   | AD    | RESISTOR |     | R4087   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3129 |   | AD    | RESISTOR |     | R4088   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3130 |   | AD    | RESISTOR |     | R4089   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3131 |   | AD    | RESISTOR |     | R4090   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3132 |   | AD    | RESISTOR |     | R4091   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3133 |   | AD    | RESISTOR |     | R4092   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3134 |   | AD    | RESISTOR |     | R4093   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3135 |   | AD    | RESISTOR |     | R4096   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3136 |   | AD    | RESISTOR |     | R4097   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3137 |   | AD    | RESISTOR |     | R4098   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3138 |   | AD    | RESISTOR |     | R4099   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3139 |   | AD    | RESISTOR |     | R4100   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |

| No.  | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption                 | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|-----|---------|--------------|----------------------------|-----------|-----------|------------|
| 3140 |   | AD    | RESISTOR |     | R4101   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3141 |   | AD    | RESISTOR |     | R4102   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3142 |   | AD    | RESISTOR |     | R4103   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3143 |   | AD    | RESISTOR |     | R4104   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3144 |   | AD    | RESISTOR |     | R4105   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3145 |   | AD    | RESISTOR |     | R4106   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3146 |   | AD    | RESISTOR |     | R4201   | 1-216-837-11 | METAL CHIP 22K 5% 1/10W    |           |           |            |
| 3147 |   | AD    | RESISTOR |     | R4202   | 1-216-837-11 | METAL CHIP 22K 5% 1/10W    |           |           |            |
| 3148 |   | AD    | RESISTOR |     | R4203   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3149 |   | AD    | RESISTOR |     | R4204   | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W |           |           |            |
| 3150 |   | AD    | RESISTOR |     | R4205   | 1-216-834-11 | METAL CHIP 12K 5% 1/10W    |           |           |            |
| 3151 |   | AD    | RESISTOR |     | R4206   | 1-216-815-11 | METAL CHIP 330 5% 1/10W    |           |           |            |
| 3152 |   | AD    | RESISTOR |     | R4207   | 1-216-815-11 | METAL CHIP 330 5% 1/10W    |           |           |            |
| 3153 |   | AD    | RESISTOR |     | R4208   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3154 |   | AD    | RESISTOR |     | R4209   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3155 |   | AD    | RESISTOR |     | R4210   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3156 |   | AD    | RESISTOR |     | R4211   | 1-218-867-11 | METAL CHIP 6.8K 0.5% 1/10W |           |           |            |
| 3157 |   | AD    | RESISTOR |     | R4212   | 1-216-834-11 | METAL CHIP 12K 5% 1/10W    |           |           |            |
| 3158 |   | AD    | RESISTOR |     | R4301   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3159 |   | AD    | RESISTOR |     | R4302   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3160 |   | AD    | RESISTOR |     | R4303   | 1-216-037-00 | RES-CHIP 330 5% 1/10W      |           |           |            |
| 3161 |   | AD    | RESISTOR |     | R4304   | 1-216-037-00 | RES-CHIP 330 5% 1/10W      |           |           |            |
| 3162 |   | AD    | RESISTOR |     | R4305   | 1-216-837-11 | METAL CHIP 22K 5% 1/10W    |           |           |            |
| 3163 |   | AD    | RESISTOR |     | R4306   | 1-216-857-11 | METAL CHIP 1M 5% 1/10W     |           |           |            |
| 3164 |   | AD    | RESISTOR |     | R4307   | 1-216-815-11 | METAL CHIP 330 5% 1/10W    |           |           |            |
| 3165 |   | AD    | RESISTOR |     | R4308   | 1-216-815-11 | METAL CHIP 330 5% 1/10W    |           |           |            |
| 3166 |   | AD    | RESISTOR |     | R4309   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 3167 |   | AD    | RESISTOR |     | R4311   | 1-216-853-11 | METAL CHIP 470K 5% 1/10W   |           |           |            |
| 3168 |   | AD    | RESISTOR |     | R4312   | 1-216-853-11 | METAL CHIP 470K 5% 1/10W   |           |           |            |
| 3169 |   | AD    | RESISTOR |     | R4314   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W    |           |           |            |
| 3170 |   | AD    | RESISTOR |     | R4316   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3171 |   | AD    | RESISTOR |     | R4317   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3172 |   | AD    | RESISTOR |     | R4318   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3173 |   | AD    | RESISTOR |     | R4319   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3174 |   | AD    | RESISTOR |     | R4322   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3175 |   | AD    | RESISTOR |     | R4323   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3176 |   | AD    | RESISTOR |     | R4324   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3177 |   | AD    | RESISTOR |     | R4325   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3178 |   | AD    | RESISTOR |     | R4326   | 1-218-684-11 | METAL CHIP 470 0.5% 1/10W  |           |           |            |
| 3179 |   | AD    | RESISTOR |     | R4327   | 1-218-684-11 | METAL CHIP 470 0.5% 1/10W  |           |           |            |
| 3180 |   | AD    | RESISTOR |     | R4328   | 1-218-685-11 | METAL CHIP 510 0.5% 1/10W  |           |           |            |
| 3181 |   | AD    | RESISTOR |     | R4329   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3182 |   | AD    | RESISTOR |     | R4330   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |

| No.  | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption                 | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|-----|---------|--------------|----------------------------|-----------|-----------|------------|
| 3183 |   | AD    | RESISTOR |     | R4331   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3184 |   | AD    | RESISTOR |     | R4332   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3185 |   | AD    | RESISTOR |     | R4335   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3186 |   | AD    | RESISTOR |     | R4336   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3187 |   | AD    | RESISTOR |     | R4343   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3188 |   | AD    | RESISTOR |     | R4345   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3189 |   | AD    | RESISTOR |     | R4352   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3190 |   | AD    | RESISTOR |     | R4358   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3191 |   | AD    | RESISTOR |     | R4367   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3192 |   | AD    | RESISTOR |     | R4369   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3193 |   | AD    | RESISTOR |     | R4370   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3194 |   | AD    | RESISTOR |     | R4371   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3195 |   | AD    | RESISTOR |     | R4374   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3196 |   | AD    | RESISTOR |     | R4375   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3197 |   | AD    | RESISTOR |     | R4379   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W   |           |           |            |
| 3198 |   | AD    | RESISTOR |     | R4380   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3199 |   | AD    | RESISTOR |     | R4381   | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W   |           |           |            |
| 3200 |   | AD    | RESISTOR |     | R4382   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3201 |   | AD    | RESISTOR |     | R4383   | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W   |           |           |            |
| 3202 |   | AD    | RESISTOR |     | R4384   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3203 |   | AD    | RESISTOR |     | R4385   | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W   |           |           |            |
| 3204 |   | AD    | RESISTOR |     | R4387   | 1-218-685-11 | METAL CHIP 510 0.5% 1/10W  |           |           |            |
| 3205 |   | AD    | RESISTOR |     | R4388   | 1-218-693-11 | METAL CHIP 1.1K 0.5% 1/10W |           |           |            |
| 3206 |   | AD    | RESISTOR |     | R4389   | 1-218-692-11 | METAL CHIP 1K 0.5% 1/10W   |           |           |            |
| 3207 |   | AD    | RESISTOR |     | R4392   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 3208 |   | AD    | RESISTOR |     | R4393   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 3209 |   | AD    | RESISTOR |     | R4399   | 1-216-853-11 | METAL CHIP 470K 5% 1/10W   |           |           |            |
| 3210 |   | AD    | RESISTOR |     | R4400   | 1-216-853-11 | METAL CHIP 470K 5% 1/10W   |           |           |            |
| 3211 |   | AD    | RESISTOR |     | R4401   | 1-216-061-91 | RES-CHIP 3.3K 5% 1/10W     |           |           |            |
| 3212 |   | AD    | RESISTOR |     | R4402   | 1-216-061-91 | RES-CHIP 3.3K 5% 1/10W     |           |           |            |
| 3213 |   | AD    | RESISTOR |     | R4405   | 1-216-857-11 | METAL CHIP 1M 5% 1/10W     |           |           |            |
| 3214 |   | AD    | RESISTOR |     | R4406   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3215 |   | AD    | RESISTOR |     | R4407   | 1-216-825-11 | METAL CHIP 2.2K 5% 1/10W   |           |           |            |
| 3216 |   | AD    | RESISTOR |     | R4408   | 1-216-837-11 | METAL CHIP 22K 5% 1/10W    |           |           |            |
| 3217 |   | AD    | RESISTOR |     | R4409   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 3218 |   | AD    | RESISTOR |     | R4410   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W    |           |           |            |
| 3219 |   | AD    | RESISTOR |     | R4411   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3220 |   | AD    | RESISTOR |     | R4417   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 3221 |   | AD    | RESISTOR |     | R4418   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 3222 |   | AD    | RESISTOR |     | R4425   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3223 |   | AD    | RESISTOR |     | R4426   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W    |           |           |            |
| 3224 |   | AD    | RESISTOR |     | R4427   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3225 |   | AD    | RESISTOR |     | R4428   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W    |           |           |            |

| No.  | # | Board | Type     | △/* | Ref.No. | Part No.     | Description                | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|-----|---------|--------------|----------------------------|-----------|-----------|------------|
| 3226 |   | AD    | RESISTOR |     | R4430   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3227 |   | AD    | RESISTOR |     | R4431   | 1-216-841-11 | METAL CHIP 47K 5% 1/10W    |           |           |            |
| 3228 |   | AD    | RESISTOR |     | R4432   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3229 |   | AD    | RESISTOR |     | R4433   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 3230 |   | AD    | RESISTOR |     | R4434   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 3231 |   | AD    | RESISTOR |     | R4435   | 1-216-805-11 | METAL CHIP 47 5% 1/10W     |           |           |            |
| 3232 |   | AD    | RESISTOR |     | R4436   | 1-216-805-11 | METAL CHIP 47 5% 1/10W     |           |           |            |
| 3233 |   | AD    | RESISTOR |     | R4437   | 1-216-836-11 | METAL CHIP 18K 5% 1/10W    |           |           |            |
| 3234 |   | AD    | RESISTOR |     | R4438   | 1-216-838-11 | METAL CHIP 27K 5% 1/10W    |           |           |            |
| 3235 |   | AD    | RESISTOR |     | R4439   | 1-216-838-11 | METAL CHIP 27K 5% 1/10W    |           |           |            |
| 3236 |   | AD    | RESISTOR |     | R4440   | 1-216-836-11 | METAL CHIP 18K 5% 1/10W    |           |           |            |
| 3237 |   | AD    | RESISTOR |     | R4501   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 3238 |   | AD    | RESISTOR |     | R4507   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3239 |   | AD    | RESISTOR |     | R4508   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3240 |   | AD    | RESISTOR |     | R4509   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3241 |   | AD    | RESISTOR |     | R4510   | 1-216-817-11 | METAL CHIP 470 5% 1/10W    |           |           |            |
| 3242 |   | AD    | RESISTOR |     | R4511   | 1-216-817-11 | METAL CHIP 470 5% 1/10W    |           |           |            |
| 3243 |   | AD    | RESISTOR |     | R4512   | 1-216-817-11 | METAL CHIP 470 5% 1/10W    |           |           |            |
| 3244 |   | AD    | RESISTOR |     | R4513   | 1-218-686-11 | METAL CHIP 560 0.5% 1/10W  |           |           |            |
| 3245 |   | AD    | RESISTOR |     | R4514   | 1-218-686-11 | METAL CHIP 560 0.5% 1/10W  |           |           |            |
| 3246 |   | AD    | RESISTOR |     | R4515   | 1-218-686-11 | METAL CHIP 560 0.5% 1/10W  |           |           |            |
| 3247 |   | AD    | RESISTOR |     | R4516   | 1-218-710-11 | METAL CHIP 5.6K 0.5% 1/10W |           |           |            |
| 3248 |   | AD    | RESISTOR |     | R4517   | 1-218-710-11 | METAL CHIP 5.6K 0.5% 1/10W |           |           |            |
| 3249 |   | AD    | RESISTOR |     | R4518   | 1-218-710-11 | METAL CHIP 5.6K 0.5% 1/10W |           |           |            |
| 3250 |   | AD    | RESISTOR |     | R4519   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3251 |   | AD    | RESISTOR |     | R4520   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3252 |   | AD    | RESISTOR |     | R4521   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3253 |   | AD    | RESISTOR |     | R4522   | 1-216-053-00 | RES-CHIP 1.5K 5% 1/10W     |           |           |            |
| 3254 |   | AD    | RESISTOR |     | R4523   | 1-216-053-00 | RES-CHIP 1.5K 5% 1/10W     |           |           |            |
| 3255 |   | AD    | RESISTOR |     | R4524   | 1-216-053-00 | RES-CHIP 1.5K 5% 1/10W     |           |           |            |
| 3256 |   | AD    | RESISTOR |     | R4525   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 3257 |   | AD    | RESISTOR |     | R4526   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 3258 |   | AD    | RESISTOR |     | R4527   | 1-218-666-11 | METAL CHIP 82 0.5% 1/10W   |           |           |            |
| 3259 |   | AD    | RESISTOR |     | R4528   | 1-218-668-11 | METAL CHIP 100 0.5% 1/10W  |           |           |            |
| 3260 |   | AD    | RESISTOR |     | R4529   | 1-218-668-11 | METAL CHIP 100 0.5% 1/10W  |           |           |            |
| 3261 |   | AD    | RESISTOR |     | R4531   | 1-218-668-11 | METAL CHIP 100 0.5% 1/10W  |           |           |            |
| 3262 |   | AD    | RESISTOR |     | R4532   | 1-218-669-11 | METAL CHIP 110 0.5% 1/10W  |           |           |            |
| 3263 |   | AD    | RESISTOR |     | R4533   | 1-216-651-11 | METAL CHIP 1K 0.5% 1/10W   |           |           |            |
| 3264 |   | AD    | RESISTOR |     | R4534   | 1-218-669-11 | METAL CHIP 110 0.5% 1/10W  |           |           |            |
| 3265 |   | AD    | RESISTOR |     | R4535   | 1-216-651-11 | METAL CHIP 1K 0.5% 1/10W   |           |           |            |
| 3266 |   | AD    | RESISTOR |     | R4536   | 1-218-669-11 | METAL CHIP 110 0.5% 1/10W  |           |           |            |
| 3267 |   | AD    | RESISTOR |     | R4537   | 1-216-651-11 | METAL CHIP 1K 0.5% 1/10W   |           |           |            |
| 3268 |   | AD    | RESISTOR |     | R4538   | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W   |           |           |            |

| No.  | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption                 | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|-----|---------|--------------|----------------------------|-----------|-----------|------------|
| 3269 |   | AD    | RESISTOR |     | R4539   | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W   |           |           |            |
| 3270 |   | AD    | RESISTOR |     | R4540   | 1-216-823-11 | METAL CHIP 1.5K 5% 1/10W   |           |           |            |
| 3271 |   | AD    | RESISTOR |     | R4545   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3272 |   | AD    | RESISTOR |     | R4546   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3273 |   | AD    | RESISTOR |     | R4547   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3274 |   | AD    | RESISTOR |     | R4548   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3275 |   | AD    | RESISTOR |     | R4549   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3276 |   | AD    | RESISTOR |     | R4550   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3277 |   | AD    | RESISTOR |     | R4551   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3278 |   | AD    | RESISTOR |     | R4554   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 3279 |   | AD    | RESISTOR |     | R4555   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3280 |   | AD    | RESISTOR |     | R4556   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3281 |   | AD    | RESISTOR |     | R4557   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3282 |   | AD    | RESISTOR |     | R4558   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3283 |   | AD    | RESISTOR |     | R4559   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3284 |   | AD    | RESISTOR |     | R4560   | 1-218-285-11 | METAL CHIP 75 5% 1/10W     |           |           |            |
| 3285 |   | AD    | RESISTOR |     | R4561   | 1-216-805-11 | METAL CHIP 47 5% 1/10W     |           |           |            |
| 3286 |   | AD    | RESISTOR |     | R4562   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3287 |   | AD    | RESISTOR |     | R4563   | 1-216-805-11 | METAL CHIP 47 5% 1/10W     |           |           |            |
| 3288 |   | AD    | RESISTOR |     | R4564   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3289 |   | AD    | RESISTOR |     | R4565   | 1-216-851-11 | METAL CHIP 330K 5% 1/10W   |           |           |            |
| 3290 |   | AD    | RESISTOR |     | R4566   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3291 |   | AD    | RESISTOR |     | R4567   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3292 |   | AD    | RESISTOR |     | R4568   | 1-218-652-11 | METAL CHIP 22 0.5% 1/10W   |           |           |            |
| 3293 |   | AD    | RESISTOR |     | R4569   | 1-218-285-11 | METAL CHIP 75 5% 1/10W     |           |           |            |
| 3294 |   | AD    | RESISTOR |     | R4570   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3295 |   | AD    | RESISTOR |     | R4571   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3296 |   | AD    | RESISTOR |     | R4572   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3297 |   | AD    | RESISTOR |     | R4573   | 1-218-693-11 | METAL CHIP 1.1K 0.5% 1/10W |           |           |            |
| 3298 |   | AD    | RESISTOR |     | R4574   | 1-218-716-11 | METAL CHIP 10K 0.5% 1/10W  |           |           |            |
| 3299 |   | AD    | RESISTOR |     | R4575   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3300 |   | AD    | RESISTOR |     | R4577   | 1-216-797-11 | METAL CHIP 10 5% 1/10W     |           |           |            |
| 3301 |   | AD    | RESISTOR |     | R4579   | 1-218-668-11 | METAL CHIP 100 0.5% 1/10W  |           |           |            |
| 3302 |   | AD    | RESISTOR |     | R4580   | 1-218-668-11 | METAL CHIP 100 0.5% 1/10W  |           |           |            |
| 3303 |   | AD    | RESISTOR |     | R4581   | 1-218-668-11 | METAL CHIP 100 0.5% 1/10W  |           |           |            |
| 3304 |   | AD    | RESISTOR |     | R4582   | 1-216-053-00 | RES-CHIP 1.5K 5% 1/10W     |           |           |            |
| 3305 |   | AD    | RESISTOR |     | R4583   | 1-216-053-00 | RES-CHIP 1.5K 5% 1/10W     |           |           |            |
| 3306 |   | AD    | RESISTOR |     | R4584   | 1-216-806-11 | METAL CHIP 56 5% 1/10W     |           |           |            |
| 3307 |   | AD    | RESISTOR |     | R4585   | 1-216-806-11 | METAL CHIP 56 5% 1/10W     |           |           |            |
| 3308 |   | AD    | RESISTOR |     | R4586   | 1-216-041-00 | RES-CHIP 470 5% 1/10W      |           |           |            |
| 3309 |   | AD    | RESISTOR |     | R4587   | 1-216-806-11 | METAL CHIP 56 5% 1/10W     |           |           |            |
| 3310 |   | AD    | RESISTOR |     | R4589   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3311 |   | AD    | RESISTOR |     | R7003   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |

| No.  | # | Board | Type     | △/* | Ref.No. | Part No.     | Descrption                 | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|----------|-----|---------|--------------|----------------------------|-----------|-----------|------------|
| 3312 |   | AD    | RESISTOR |     | R7004   | 1-218-852-11 | METAL CHIP 1.6K 0.5% 1/10W |           |           |            |
| 3313 |   | AD    | RESISTOR |     | R7005   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3314 |   | AD    | RESISTOR |     | R7006   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3315 |   | AD    | RESISTOR |     | R7007   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3316 |   | AD    | RESISTOR |     | R7011   | 1-216-849-11 | METAL CHIP 220K 5% 1/10W   |           |           |            |
| 3317 |   | AD    | RESISTOR |     | R7012   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3318 |   | AD    | RESISTOR |     | R7013   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3319 |   | AD    | RESISTOR |     | R7014   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W     |           |           |            |
| 3320 |   | AD    | RESISTOR |     | R7015   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3321 |   | AD    | RESISTOR |     | R7016   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3322 |   | AD    | RESISTOR |     | R7020   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3323 |   | AD    | RESISTOR |     | R7021   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3324 |   | AD    | RESISTOR |     | R7022   | 1-216-849-11 | METAL CHIP 220K 5% 1/10W   |           |           |            |
| 3325 |   | AD    | RESISTOR |     | R7023   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3326 |   | AD    | RESISTOR |     | R7024   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3327 |   | AD    | RESISTOR |     | R7025   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3328 |   | AD    | RESISTOR |     | R7026   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3329 |   | AD    | RESISTOR |     | R7029   | 1-218-692-11 | METAL CHIP 1K 0.5% 1/10W   |           |           |            |
| 3330 |   | AD    | RESISTOR |     | R7030   | 1-414-760-21 | FERRITE 0UH                |           |           |            |
| 3331 |   | AD    | RESISTOR |     | R7032   | 1-218-676-11 | METAL CHIP 220 0.5% 1/10W  |           |           |            |
| 3332 |   | AD    | RESISTOR |     | R7034   | 1-218-676-11 | METAL CHIP 220 0.5% 1/10W  |           |           |            |
| 3333 |   | AD    | RESISTOR |     | R7036   | 1-218-704-11 | METAL CHIP 3.3K 0.5% 1/10W |           |           |            |
| 3334 |   | AD    | RESISTOR |     | R7037   | 1-218-676-11 | METAL CHIP 220 0.5% 1/10W  |           |           |            |
| 3335 |   | AD    | RESISTOR |     | R7040   | 1-216-837-11 | METAL CHIP 22K 5% 1/10W    |           |           |            |
| 3336 |   | AD    | RESISTOR |     | R7041   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3337 |   | AD    | RESISTOR |     | R7043   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W   |           |           |            |
| 3338 |   | AD    | RESISTOR |     | R7044   | 1-216-829-11 | METAL CHIP 4.7K 5% 1/10W   |           |           |            |
| 3339 |   | AD    | RESISTOR |     | R7045   | 1-216-837-11 | METAL CHIP 22K 5% 1/10W    |           |           |            |
| 3340 |   | AD    | RESISTOR |     | R7047   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3341 |   | AD    | RESISTOR |     | R7051   | 1-216-864-11 | SHORT CHIP 0               |           |           |            |
| 3342 |   | AD    | RESISTOR |     | R7053   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3343 |   | AD    | RESISTOR |     | R7054   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3344 |   | AD    | RESISTOR |     | R7056   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3345 |   | AD    | RESISTOR |     | R7057   | 1-414-760-21 | FERRITE 0UH                |           |           |            |
| 3346 |   | AD    | RESISTOR |     | R7058   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3347 |   | AD    | RESISTOR |     | R7060   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3348 |   | AD    | RESISTOR |     | R7061   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3349 |   | AD    | RESISTOR |     | R7062   | 1-414-760-21 | FERRITE 0UH                |           |           |            |
| 3350 |   | AD    | RESISTOR |     | R7063   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3351 |   | AD    | RESISTOR |     | R7064   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |
| 3352 |   | AD    | RESISTOR |     | R7066   | 1-218-694-11 | METAL CHIP 1.2K 0.5% 1/10W |           |           |            |
| 3353 |   | AD    | RESISTOR |     | R7067   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W    |           |           |            |
| 3354 |   | AD    | RESISTOR |     | R7068   | 1-216-809-11 | METAL CHIP 100 5% 1/10W    |           |           |            |

| No.  | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                     | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-----|---------|--------------|--------------------------------|-----------|-----------|------------|
| 3355 |   | AD    | RESISTOR  |     | R7069   | 1-216-809-11 | METAL CHIP 100 5% 1/10W        |           |           |            |
| 3356 |   | AD    | RESISTOR  |     | R7071   | 1-216-803-11 | METAL CHIP 33 5% 1/10W         |           |           |            |
| 3357 |   | AD    | RESISTOR  |     | R7072   | 1-216-803-11 | METAL CHIP 33 5% 1/10W         |           |           |            |
| 3358 |   | AD    | RESISTOR  |     | R7075   | 1-218-676-11 | METAL CHIP 220 0.5% 1/10W      |           |           |            |
| 3359 |   | AD    | RESISTOR  |     | R7080   | 1-218-680-11 | METAL CHIP 330 0.5% 1/10W      |           |           |            |
| 3360 |   | AD    | RESISTOR  |     | R7087   | 1-218-680-11 | METAL CHIP 330 0.5% 1/10W      |           |           |            |
| 3361 |   | AD    | RESISTOR  |     | R7096   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W        |           |           |            |
| 3362 |   | AD    | RESISTOR  |     | R7097   | 1-216-805-11 | METAL CHIP 47 5% 1/10W         |           |           |            |
| 3363 |   | AD    | RESISTOR  |     | R7098   | 1-216-805-11 | METAL CHIP 47 5% 1/10W         |           |           |            |
| 3364 |   | AD    | RESISTOR  |     | R7099   | 1-216-805-11 | METAL CHIP 47 5% 1/10W         |           |           |            |
| 3365 |   | AD    | RESISTOR  |     | R7101   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 3366 |   | AD    | RESISTOR  |     | R7106   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W        |           |           |            |
| 3367 |   | AD    | RESISTOR  |     | R7108   | 1-216-805-11 | METAL CHIP 47 5% 1/10W         |           |           |            |
| 3368 |   | AD    | RESISTOR  |     | R7109   | 1-216-805-11 | METAL CHIP 47 5% 1/10W         |           |           |            |
| 3369 |   | AD    | RESISTOR  |     | R7111   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 3370 |   | AD    | RESISTOR  |     | R7112   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 3371 |   | AD    | RESISTOR  |     | R7113   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 3372 |   | AD    | RESISTOR  |     | R7114   | 1-218-700-11 | METAL CHIP 2.2K 0.5% 1/10W     |           |           |            |
| 3373 |   | AD    | RESISTOR  |     | R7115   | 1-218-700-11 | METAL CHIP 2.2K 0.5% 1/10W     |           |           |            |
| 3374 |   | AD    | RESISTOR  |     | R7116   | 1-218-700-11 | METAL CHIP 2.2K 0.5% 1/10W     |           |           |            |
| 3375 |   | AD    | RESISTOR  |     | R7117   | 1-218-668-11 | METAL CHIP 100 0.5% 1/10W      |           |           |            |
| 3376 |   | AD    | RESISTOR  |     | R7119   | 1-218-668-11 | METAL CHIP 100 0.5% 1/10W      |           |           |            |
| 3377 |   | AD    | RESISTOR  |     | R7121   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 3378 |   | AD    | RESISTOR  |     | R7123   | 1-218-704-11 | METAL CHIP 3.3K 0.5% 1/10W     |           |           |            |
| 3379 |   | AD    | RESISTOR  |     | R7124   | 1-218-704-11 | METAL CHIP 3.3K 0.5% 1/10W     |           |           |            |
| 3380 |   | AD    | RESISTOR  |     | R7125   | 1-218-700-11 | METAL CHIP 2.2K 0.5% 1/10W     |           |           |            |
| 3381 |   | AD    | CRYSTAL   |     | X4501   | 1-795-214-21 | VIBRATOR, CERAMIC (4MHZ)       |           |           |            |
| 3382 |   | AD    | CRYSTAL   |     | X7001   | 1-795-568-21 | VIBRATOR, CRYSTAL              |           |           |            |
| 3383 |   | AD    | CRYSTAL   |     | X7002   | 1-795-567-21 | VIBRATOR, CRYSTAL              |           |           |            |
| 3384 |   | H2    | CAPACITOR |     | C50     | 1-119-824-11 | ELECT 10UF 20.00% 50V          |           |           |            |
| 3385 |   | H2    | CAPACITOR |     | C51     | 1-119-824-11 | ELECT 10UF 20.00% 50V          |           |           |            |
| 3386 |   | H2    | CAPACITOR |     | C52     | 1-126-964-11 | ELECT 10UF 20.00% 50V          |           |           |            |
| 3387 |   | H2    | CAPACITOR |     | C53     | 1-126-964-11 | ELECT 10UF 20.00% 50V          |           |           |            |
| 3388 |   | H2    | CAPACITOR |     | C70     | 1-162-974-11 | CERAMIC CHIP 0.01UF 50V        |           |           |            |
| 3389 |   | H2    | CAPACITOR |     | C72     | 1-115-156-11 | CERAMIC CHIP 1UF 10V           |           |           |            |
| 3390 |   | H2    | CAPACITOR |     | C77     | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 3391 |   | H2    | CAPACITOR |     | C79     | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 3392 |   | H2    | CAPACITOR |     | C80     | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 3393 |   | H2    | CONNECTOR |     | CN43    | 1-817-097-21 | PIN, CONNECTOR (1.5MM)(SMD)13P |           |           |            |
| 3394 |   | H2    | DIODE     |     | D40     | 8-719-977-28 | DIODE DTZ10B                   |           |           |            |
| 3395 |   | H2    | DIODE     |     | D49     | 8-719-977-28 | DIODE DTZ10B                   |           |           |            |
| 3396 |   | H2    | DIODE     |     | D50     | 8-719-977-28 | DIODE DTZ10B                   |           |           |            |
| 3397 |   | H2    | DIODE     |     | D51     | 8-719-977-28 | DIODE DTZ10B                   |           |           |            |

| No.  | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                      | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-----|---------|--------------|---------------------------------|-----------|-----------|------------|
| 3398 |   | H2    | DIODE     |     | D52     | 8-719-977-28 | DIODE DTZ10B                    |           |           |            |
| 3399 |   | H2    | SOCKET    |     | J40     | 1-694-716-11 | TERMINAL BLOCK, S(LIGHT ANGLE)  |           |           |            |
| 3400 |   | H2    | RESISTOR  |     | R46     | 1-216-849-11 | METAL CHIP 220K 5% 1/10W        |           |           |            |
| 3401 |   | H2    | RESISTOR  |     | R47     | 1-216-849-11 | METAL CHIP 220K 5% 1/10W        |           |           |            |
| 3402 |   | H2    | RESISTOR  |     | R48     | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W        |           |           |            |
| 3403 |   | H2    | RESISTOR  |     | R50     | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W        |           |           |            |
| 3404 |   | H2    | RESISTOR  |     | R75     | 1-216-821-11 | METAL CHIP 1K 5% 1/10W          |           |           |            |
| 3405 |   | H2    | RESISTOR  |     | R89     | 1-218-665-11 | METAL CHIP 75 0.5% 1/10W        |           |           |            |
| 3406 |   | H2    | RESISTOR  |     | R95     | 1-216-864-11 | SHORT CHIP 0                    |           |           |            |
| 3407 |   | H2    | RESISTOR  |     | R96     | 1-216-864-11 | SHORT CHIP 0                    |           |           |            |
| 3408 |   | H2    | VARISTOR  |     | VD40    | 1-803-974-21 | VARISTOR, CHIP (1608)           |           |           |            |
| 3409 |   | DP    | CAPACITOR |     | C1606   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V          |           |           |            |
| 3410 |   | DP    | CAPACITOR |     | C1607   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V          |           |           |            |
| 3411 |   | DP    | CAPACITOR |     | C1608   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V          |           |           |            |
| 3412 |   | DP    | CAPACITOR |     | C1609   | 1-110-530-11 | ELECT CHIP 1000UF 20.00% 6.3V   |           |           |            |
| 3413 |   | DP    | CAPACITOR |     | C1610   | 1-110-530-11 | ELECT CHIP 1000UF 20.00% 6.3V   |           |           |            |
| 3414 |   | DP    | CAPACITOR |     | C1611   | 1-110-530-11 | ELECT CHIP 1000UF 20.00% 6.3V   |           |           |            |
| 3415 |   | DP    | CAPACITOR |     | C1612   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V          |           |           |            |
| 3416 |   | DP    | CAPACITOR |     | C1613   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V          |           |           |            |
| 3417 |   | DP    | CAPACITOR |     | C1614   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V          |           |           |            |
| 3418 |   | DP    | CAPACITOR |     | C1615   | 1-119-765-11 | ELECT 47UF 20.00% 6.3V          |           |           |            |
| 3419 |   | DP    | CAPACITOR |     | C1616   | 1-119-765-11 | ELECT 47UF 20.00% 6.3V          |           |           |            |
| 3420 |   | DP    | CAPACITOR |     | C1617   | 1-119-765-11 | ELECT 47UF 20.00% 6.3V          |           |           |            |
| 3421 |   | DP    | CAPACITOR |     | C1618   | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V |           |           |            |
| 3422 |   | DP    | CAPACITOR |     | C1619   | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V |           |           |            |
| 3423 |   | DP    | CAPACITOR |     | C1620   | 1-165-176-11 | CERAMIC CHIP 0.047UF 10.00% 16V |           |           |            |
| 3424 |   | DP    | CAPACITOR |     | C1624   | 1-216-864-11 | SHORT CHIP 0                    |           |           |            |
| 3425 |   | DP    | CAPACITOR |     | C1625   | 1-216-864-11 | SHORT CHIP 0                    |           |           |            |
| 3426 |   | DP    | CAPACITOR |     | C1626   | 1-216-864-11 | SHORT CHIP 0                    |           |           |            |
| 3427 |   | DP    | CAPACITOR |     | C1627   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V          |           |           |            |
| 3428 |   | DP    | CAPACITOR |     | C1628   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V          |           |           |            |
| 3429 |   | DP    | CAPACITOR |     | C1629   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V          |           |           |            |
| 3430 |   | DP    | CAPACITOR |     | C1630   | 1-165-811-91 | CERAMIC CHIP 22UF 10% 16V       |           |           |            |
| 3431 |   | DP    | CAPACITOR |     | C1631   | 1-165-811-91 | CERAMIC CHIP 22UF 10% 16V       |           |           |            |
| 3432 |   | DP    | CAPACITOR |     | C1632   | 1-165-811-91 | CERAMIC CHIP 22UF 10% 16V       |           |           |            |
| 3433 |   | DP    | CAPACITOR |     | C1633   | 1-165-811-91 | CERAMIC CHIP 22UF 10% 16V       |           |           |            |
| 3434 |   | DP    | CAPACITOR |     | C1634   | 1-165-811-91 | CERAMIC CHIP 22UF 10% 16V       |           |           |            |
| 3435 |   | DP    | CAPACITOR |     | C1636   | 1-128-396-11 | ELECT CHIP 470UF 20.00% 10V     |           |           |            |
| 3436 |   | DP    | CAPACITOR |     | C1637   | 1-128-396-11 | ELECT CHIP 470UF 20.00% 10V     |           |           |            |
| 3437 |   | DP    | CAPACITOR |     | C1638   | 1-128-396-11 | ELECT CHIP 470UF 20.00% 10V     |           |           |            |
| 3438 |   | DP    | CAPACITOR |     | C1640   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V  |           |           |            |
| 3439 |   | DP    | CONNECTOR | *   | CN1601  | 1-764-333-11 | PLUG, CONNECTOR (V) 10P         |           |           |            |
| 3440 |   | DP    | CONNECTOR |     | CN1604  | 1-793-496-11 | CONNECTOR, BOARD TO BOARD 20P   |           |           |            |



| No.  | # | Board | Type       | △/* | Ref.No. | Part No.     | Descrption                | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|------------|-----|---------|--------------|---------------------------|-----------|-----------|------------|
| 3441 |   | DP    | DIODE      |     | D1601   | 8-719-404-50 | DIODE MA111-TX            |           |           |            |
| 3442 |   | DP    | DIODE      |     | D1602   | 8-719-404-50 | DIODE MA111-TX            |           |           |            |
| 3443 |   | DP    | DIODE      |     | D1603   | 8-719-404-50 | DIODE MA111-TX            |           |           |            |
| 3444 |   | DP    | DIODE      |     | D1604   | 8-719-056-78 | DIODE UDZ-TE-17-4.3B      |           |           |            |
| 3445 |   | DP    | DIODE      |     | D1605   | 8-719-056-78 | DIODE UDZ-TE-17-4.3B      |           |           |            |
| 3446 |   | DP    | DIODE      |     | D1606   | 8-719-056-78 | DIODE UDZ-TE-17-4.3B      |           |           |            |
| 3447 |   | DP    | DIODE      |     | D1607   | 8-719-066-33 | DIODE RB081L-20TE25       |           |           |            |
| 3448 |   | DP    | DIODE      |     | D1608   | 8-719-066-33 | DIODE RB081L-20TE25       |           |           |            |
| 3449 |   | DP    | DIODE      |     | D1609   | 8-719-066-33 | DIODE RB081L-20TE25       |           |           |            |
| 3450 |   | DP    | DIODE      |     | D1610   | 8-719-066-33 | DIODE RB081L-20TE25       |           |           |            |
| 3451 |   | DP    | DIODE      |     | D1611   | 8-719-066-33 | DIODE RB081L-20TE25       |           |           |            |
| 3452 |   | DP    | DIODE      |     | D1612   | 8-719-066-33 | DIODE RB081L-20TE25       |           |           |            |
| 3453 |   | DP    | FERRITE    |     | FB1601  | 1-469-568-21 | FERRITE 0UH               |           |           |            |
| 3454 |   | DP    | FILTER     |     | FL1602  | 1-234-494-21 | FILTER, EMI REMOVAL (SMD) |           |           |            |
| 3455 |   | DP    | FILTER     |     | FL1604  | 1-234-494-21 | FILTER, EMI REMOVAL (SMD) |           |           |            |
| 3456 |   | DP    | FILTER     |     | FL1606  | 1-234-494-21 | FILTER, EMI REMOVAL (SMD) |           |           |            |
| 3457 |   | DP    | FILTER     |     | FL1608  | 1-234-494-21 | FILTER, EMI REMOVAL (SMD) |           |           |            |
| 3458 |   | DP    | FILTER     |     | FL1610  | 1-234-494-21 | FILTER, EMI REMOVAL (SMD) |           |           |            |
| 3459 |   | DP    | FILTER     |     | FL1612  | 1-234-494-21 | FILTER, EMI REMOVAL (SMD) |           |           |            |
| 3460 |   | DP    | IC         |     | IC1603  | 8-759-677-25 | IC S-8520B25MC-ARK-T2     |           |           |            |
| 3461 |   | DP    | IC         |     | IC1604  | 8-759-677-27 | IC S-8520B33MC-ARS-T2     |           |           |            |
| 3462 |   | DP    | IC         |     | IC1605  | 6-700-598-01 | IC S-8520B18MC-ARD-T2     |           |           |            |
| 3463 |   | DP    | COIL       |     | L1601   | 1-424-758-21 | INDUCTOR 10UH             |           |           |            |
| 3464 |   | DP    | COIL       |     | L1602   | 1-424-758-21 | INDUCTOR 10UH             |           |           |            |
| 3465 |   | DP    | COIL       |     | L1603   | 1-424-758-21 | INDUCTOR 10UH             |           |           |            |
| 3466 |   | DP    | COIL       |     | L1604   | 1-424-922-21 | INDUCTOR 10UH             |           |           |            |
| 3467 |   | DP    | COIL       |     | L1605   | 1-424-758-21 | INDUCTOR 10UH             |           |           |            |
| 3468 |   | DP    | COIL       |     | L1606   | 1-424-758-21 | INDUCTOR 10UH             |           |           |            |
| 3469 |   | DP    | FUSE       | △   | PS1601  | 1-533-272-11 | FUSE 4A 125V              |           |           |            |
| 3470 |   | DP    | FUSE       | △   | PS1602  | 1-533-272-11 | FUSE 4A 125V              |           |           |            |
| 3471 |   | DP    | FUSE       | △   | PS1603  | 1-533-272-11 | FUSE 4A 125V              |           |           |            |
| 3472 |   | DP    | TRANSISTOR |     | Q1608   | 8-729-905-35 | TRANSISTOR 2SC4081-R      |           |           |            |
| 3473 |   | DP    | TRANSISTOR | *   | Q1609   | 8-729-045-93 | TRANSISTOR IMZ4T108       |           |           |            |
| 3474 |   | DP    | TRANSISTOR | *   | Q1610   | 8-729-045-93 | TRANSISTOR IMZ4T108       |           |           |            |
| 3475 |   | DP    | TRANSISTOR | *   | Q1611   | 8-729-045-93 | TRANSISTOR IMZ4T108       |           |           |            |
| 3476 |   | DP    | TRANSISTOR |     | Q1612   | 8-729-052-44 | TRANSISTOR 2SJ538-TL      |           |           |            |
| 3477 |   | DP    | TRANSISTOR |     | Q1613   | 8-729-052-44 | TRANSISTOR 2SJ538-TL      |           |           |            |
| 3478 |   | DP    | TRANSISTOR |     | Q1614   | 8-729-052-44 | TRANSISTOR 2SJ538-TL      |           |           |            |
| 3479 |   | DP    | RESISTOR   |     | R1614   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W   |           |           |            |
| 3480 |   | DP    | RESISTOR   |     | R1615   | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W |           |           |            |
| 3481 |   | DP    | RESISTOR   |     | R1616   | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W |           |           |            |
| 3482 |   | DP    | RESISTOR   |     | R1617   | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W |           |           |            |
| 3483 |   | DP    | RESISTOR   |     | R1618   | 1-218-837-11 | METAL CHIP 390 0.5% 1/10W |           |           |            |

| No.  | # | Board | Type      | △/* | Ref.No. | Part No.     | Descrption                     | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-----|---------|--------------|--------------------------------|-----------|-----------|------------|
| 3484 |   | DP    | RESISTOR  |     | R1619   | 1-218-835-11 | METAL CHIP 330 0.5% 1/10W      |           |           |            |
| 3485 |   | DP    | RESISTOR  |     | R1620   | 1-218-837-11 | METAL CHIP 390 0.5% 1/10W      |           |           |            |
| 3486 |   | DP    | RESISTOR  |     | R1621   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W         |           |           |            |
| 3487 |   | DP    | RESISTOR  |     | R1622   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W         |           |           |            |
| 3488 |   | DP    | RESISTOR  |     | R1623   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W         |           |           |            |
| 3489 |   | DP    | RESISTOR  |     | R1624   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 3490 |   | DP    | RESISTOR  |     | R1625   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 3491 |   | DP    | RESISTOR  |     | R1626   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 3492 |   | DP    | RESISTOR  |     | R1627   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 3493 |   | DP    | RESISTOR  |     | R1628   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 3494 |   | DP    | RESISTOR  |     | R1629   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 3495 |   | DP    | RESISTOR  |     | R1630   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 3496 |   | DP    | RESISTOR  |     | R1631   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 3497 |   | DP    | RESISTOR  |     | R1632   | 1-216-864-11 | SHORT CHIP 0                   |           |           |            |
| 3498 |   | MS2   | CAPACITOR |     | C1405   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 3499 |   | MS2   | CAPACITOR |     | C1406   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V |           |           |            |
| 3500 |   | MS2   | CAPACITOR |     | C1408   | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V     |           |           |            |
| 3501 |   | MS2   | CAPACITOR |     | C1409   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 3502 |   | MS2   | CAPACITOR |     | C1410   | 1-163-021-91 | CERAMIC CHIP 0.01UF 10.00% 50V |           |           |            |
| 3503 |   | MS2   | CAPACITOR |     | C1412   | 1-164-156-11 | CERAMIC CHIP 0.1UF 25V         |           |           |            |
| 3504 |   | MS2   | CAPACITOR |     | C1413   | 1-126-390-11 | ELECT CHIP 22UF 20.00% 6.3V    |           |           |            |
| 3505 |   | MS2   | CAPACITOR |     | C1414   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V  |           |           |            |
| 3506 |   | MS2   | CAPACITOR |     | C1415   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V  |           |           |            |
| 3507 |   | MS2   | CAPACITOR |     | C1416   | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V  |           |           |            |
| 3508 |   | MS2   | CAPACITOR |     | C1417   | 1-126-390-11 | ELECT CHIP 22UF 20.00% 6.3V    |           |           |            |
| 3509 |   | MS2   | CAPACITOR |     | C1419   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 3510 |   | MS2   | CAPACITOR |     | C1420   | 1-162-970-11 | CERAMIC CHIP 0.01UF 10.00% 25V |           |           |            |
| 3511 |   | MS2   | CONNECTOR | *   | CN1401  | 1-816-402-12 | CONNECTOR, MEMORY STICK        |           |           |            |
| 3512 |   | MS2   | CONNECTOR | *   | CN1402  | 1-816-124-11 | PIN, CONNECTOR (FOR PWB) 18P   |           |           |            |
| 3513 |   | MS2   | CONNECTOR |     | CN1404  | 1-695-915-11 | TAB (CONTACT)                  |           |           |            |
| 3514 |   | MS2   | DIODE     |     | D1401   | 8-719-421-69 | DIODE MA133                    |           |           |            |
| 3515 |   | MS2   | DIODE     |     | D1402   | 8-719-421-69 | DIODE MA133                    |           |           |            |
| 3516 |   | MS2   | DIODE     |     | D1403   | 8-719-421-69 | DIODE MA133                    |           |           |            |
| 3517 |   | MS2   | DIODE     |     | D1404   | 8-719-421-69 | DIODE MA133                    |           |           |            |
| 3518 |   | MS2   | DIODE     |     | D1405   | 8-719-421-69 | DIODE MA133                    |           |           |            |
| 3519 |   | MS2   | DIODE     |     | D1406   | 8-719-421-69 | DIODE MA133                    |           |           |            |
| 3520 |   | MS2   | DIODE     |     | D1407   | 8-719-421-69 | DIODE MA133                    |           |           |            |
| 3521 |   | MS2   | DIODE     |     | D1408   | 8-719-421-69 | DIODE MA133                    |           |           |            |
| 3522 |   | MS2   | DIODE     |     | D1409   | 6-500-348-01 | DIODE KPA-3010ID-GEC           |           |           |            |
| 3523 |   | MS2   | DIODE     |     | D1410   | 6-500-019-01 | DIODE MM3Z3V9ST1               |           |           |            |
| 3524 |   | MS2   | DIODE     |     | D1411   | 6-500-019-01 | DIODE MM3Z3V9ST1               |           |           |            |
| 3525 |   | MS2   | DIODE     |     | D1412   | 8-719-421-69 | DIODE MA133                    |           |           |            |
| 3526 |   | MS2   | DIODE     |     | D1413   | 8-719-421-69 | DIODE MA133                    |           |           |            |

| No.  | # | Board | Type       | △/* | Ref.No. | Part No.     | Descrption                    | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|------------|-----|---------|--------------|-------------------------------|-----------|-----------|------------|
| 3527 |   | MS2   | DIODE      |     | D1414   | 8-719-421-69 | DIODE MA133                   |           |           |            |
| 3528 |   | MS2   | DIODE      |     | D1415   | 8-719-421-69 | DIODE MA133                   |           |           |            |
| 3529 |   | MS2   | DIODE      |     | D1416   | 8-719-421-69 | DIODE MA133                   |           |           |            |
| 3530 |   | MS2   | DIODE      |     | D1417   | 8-719-421-69 | DIODE MA133                   |           |           |            |
| 3531 |   | MS2   | FERRITE    |     | FB1401  | 1-414-921-11 | FERRITE 0UH                   |           |           |            |
| 3532 |   | MS2   | FERRITE    |     | FB1402  | 1-414-921-11 | FERRITE 0UH                   |           |           |            |
| 3533 |   | MS2   | FERRITE    |     | FB1403  | 1-414-921-11 | FERRITE 0UH                   |           |           |            |
| 3534 |   | MS2   | FERRITE    |     | FB1404  | 1-414-921-11 | FERRITE 0UH                   |           |           |            |
| 3535 |   | MS2   | IC         |     | IC1401  | 8-759-639-86 | IC SN65LVDS32DR               |           |           |            |
| 3536 |   | MS2   | IC         |     | IC1402  | 6-701-763-11 | IC DS90LV017ATMX              |           |           |            |
| 3537 |   | MS2   | IC         |     | IC1402  | 6-702-546-11 | IC SN65LVDS1DR                |           |           |            |
| 3538 |   | MS2   | IC         |     | IC1403  | 8-759-698-08 | IC SN74CBTLV1G125DCKR         |           |           |            |
| 3539 |   | MS2   | COIL       |     | L1401   | 1-419-370-21 | INDUCTOR 0UH                  |           |           |            |
| 3540 |   | MS2   | COIL       |     | L1402   | 1-419-370-21 | INDUCTOR 0UH                  |           |           |            |
| 3541 |   | MS2   | COIL       |     | L1403   | 1-419-370-21 | INDUCTOR 0UH                  |           |           |            |
| 3542 |   | MS2   | COIL       |     | L1404   | 1-419-370-21 | INDUCTOR 0UH                  |           |           |            |
| 3543 |   | MS2   | COIL       |     | L1405   | 1-419-370-21 | INDUCTOR 0UH                  |           |           |            |
| 3544 |   | MS2   | TRANSISTOR |     | Q1401   | 8-729-140-63 | TRANSISTOR 2SA1611-M5M6       |           |           |            |
| 3545 |   | MS2   | TRANSISTOR |     | Q1402   | 8-729-029-14 | TRANSISTOR DTC144EUA-T106     |           |           |            |
| 3546 |   | MS2   | TRANSISTOR |     | Q1403   | 8-729-216-22 | TRANSISTOR 2SA1162-G          |           |           |            |
| 3547 |   | MS2   | RESISTOR   |     | R1401   | 1-216-801-11 | METAL CHIP 22 5% 1/10W        |           |           |            |
| 3548 |   | MS2   | RESISTOR   |     | R1402   | 1-216-801-11 | METAL CHIP 22 5% 1/10W        |           |           |            |
| 3549 |   | MS2   | RESISTOR   |     | R1403   | 1-216-801-11 | METAL CHIP 22 5% 1/10W        |           |           |            |
| 3550 |   | MS2   | RESISTOR   |     | R1404   | 1-216-801-11 | METAL CHIP 22 5% 1/10W        |           |           |            |
| 3551 |   | MS2   | RESISTOR   |     | R1405   | 1-218-692-11 | METAL CHIP 1K 0.5% 1/10W      |           |           |            |
| 3552 |   | MS2   | RESISTOR   |     | R1406   | 1-216-809-11 | METAL CHIP 100 5% 1/10W       |           |           |            |
| 3553 |   | MS2   | RESISTOR   |     | R1407   | 1-216-809-11 | METAL CHIP 100 5% 1/10W       |           |           |            |
| 3554 |   | MS2   | RESISTOR   |     | R1408   | 1-216-809-11 | METAL CHIP 100 5% 1/10W       |           |           |            |
| 3555 |   | MS2   | RESISTOR   |     | R1409   | 1-216-809-11 | METAL CHIP 100 5% 1/10W       |           |           |            |
| 3556 |   | MS2   | RESISTOR   |     | R1410   | 1-216-803-11 | METAL CHIP 33 5% 1/10W        |           |           |            |
| 3557 |   | MS2   | RESISTOR   |     | R1421   | 1-216-821-11 | METAL CHIP 1K 5% 1/10W        |           |           |            |
| 3558 |   | MS2   | RESISTOR   |     | R1422   | 1-216-809-11 | METAL CHIP 100 5% 1/10W       |           |           |            |
| 3559 |   | MS2   | RESISTOR   |     | R1424   | 1-216-833-11 | METAL CHIP 10K 5% 1/10W       |           |           |            |
| 3560 |   | MS2   | RESISTOR   |     | R1425   | 1-216-845-11 | METAL CHIP 100K 5% 1/10W      |           |           |            |
| 3561 |   | MS2   | RESISTOR   |     | R1426   | 1-218-871-11 | METAL CHIP 10K 0.5% 1/10W     |           |           |            |
| 3562 |   | MS2   | RESISTOR   |     | R1428   | 1-216-864-11 | SHORT CHIP 0                  |           |           |            |
| 3563 |   | MS2   | RESISTOR   |     | R1431   | 1-216-864-11 | SHORT CHIP 0                  |           |           |            |
| 3564 |   | H1    | CAPACITOR  |     | C101    | 1-124-779-00 | ELECT CHIP 10UF 20.00% 16V    |           |           |            |
| 3565 |   | H1    | CAPACITOR  |     | C102    | 1-107-826-11 | CERAMIC CHIP 0.1UF 10.00% 16V |           |           |            |
| 3566 |   | H1    | CAPACITOR  |     | C104    | 1-162-974-11 | CERAMIC CHIP 0.01UF 50V       |           |           |            |
| 3567 |   | H1    | CONNECTOR  |     | CN101   | 1-565-881-11 | PIN, CONNECTOR (PC BOARD) 9P  |           |           |            |
| 3568 |   | H1    | CONNECTOR  | *   | CN105   | 1-565-882-11 | PIN, CONNECTOR (PC BOARD) 10P |           |           |            |
| 3569 |   | H1    | CONNECTOR  |     | CN106   | 1-565-878-11 | PIN, CONNECTOR (PC BOARD) 6P  |           |           |            |

| No.  | # | Board | Type       | △/* | Ref.No. | Part No.     | Descrption                   | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|------------|-----|---------|--------------|------------------------------|-----------|-----------|------------|
| 3570 |   | H1    | CONNECTOR  | *   | CN107   | 1-565-876-11 | PIN, CONNECTOR (PC BOARD) 4P |           |           |            |
| 3571 |   | H1    | DIODE      |     | D101    | 6-500-284-01 | DIODE DB3804X                |           |           |            |
| 3572 |   | H1    | DIODE      |     | D102    | 6-500-284-01 | DIODE DB3804X                |           |           |            |
| 3573 |   | H1    | DIODE      |     | D103    | 6-500-284-01 | DIODE DB3804X                |           |           |            |
| 3574 |   | H1    | DIODE      |     | D104    | 6-500-284-01 | DIODE DB3804X                |           |           |            |
| 3575 |   | H1    | DIODE      |     | D105    | 6-500-284-01 | DIODE DB3804X                |           |           |            |
| 3576 |   | H1    | DIODE      |     | D106    | 6-500-284-01 | DIODE DB3804X                |           |           |            |
| 3577 |   | H1    | DIODE      |     | D107    | 6-500-284-01 | DIODE DB3804X                |           |           |            |
| 3578 |   | H1    | DIODE      |     | D108    | 6-500-284-01 | DIODE DB3804X                |           |           |            |
| 3579 |   | H1    | DIODE      |     | D110    | 8-719-069-55 | DIODE UDZSTE-175.6B          |           |           |            |
| 3580 |   | H1    | DIODE      |     | D118    | 1-216-864-11 | SHORT CHIP 0                 |           |           |            |
| 3581 |   | H1    | DIODE      |     | D120    | 8-719-404-50 | DIODE MA111-TX               |           |           |            |
| 3582 |   | H1    | DIODE      |     | D121    | 8-719-404-50 | DIODE MA111-TX               |           |           |            |
| 3583 |   | H1    | DIODE      |     | D122    | 8-719-404-50 | DIODE MA111-TX               |           |           |            |
| 3584 |   | H1    | DIODE      |     | D123    | 8-719-404-50 | DIODE MA111-TX               |           |           |            |
| 3585 |   | H1    | DIODE      |     | D126    | 8-719-064-11 | DIODE SPR-325MVW             |           |           |            |
| 3586 |   | H1    | DIODE      |     | D127    | 8-719-064-11 | DIODE SPR-325MVW             |           |           |            |
| 3587 |   | H1    | IC         |     | IC101   | 8-759-567-08 | IC MB88141APF-ER             |           |           |            |
| 3588 |   | H1    | TRANSISTOR |     | Q101    | 8-729-907-00 | TRANSISTOR DTC114EU          |           |           |            |
| 3589 |   | H1    | TRANSISTOR |     | Q102    | 8-729-907-00 | TRANSISTOR DTC114EU          |           |           |            |
| 3590 |   | H1    | TRANSISTOR |     | Q103    | 8-729-907-00 | TRANSISTOR DTC114EU          |           |           |            |
| 3591 |   | H1    | TRANSISTOR |     | Q104    | 8-729-907-00 | TRANSISTOR DTC114EU          |           |           |            |
| 3592 |   | H1    | TRANSISTOR |     | Q105    | 8-729-907-00 | TRANSISTOR DTC114EU          |           |           |            |
| 3593 |   | H1    | TRANSISTOR |     | Q106    | 8-729-907-00 | TRANSISTOR DTC114EU          |           |           |            |
| 3594 |   | H1    | TRANSISTOR |     | Q107    | 8-729-907-00 | TRANSISTOR DTC114EU          |           |           |            |
| 3595 |   | H1    | TRANSISTOR |     | Q108    | 8-729-907-00 | TRANSISTOR DTC114EU          |           |           |            |
| 3596 |   | H1    | TRANSISTOR |     | Q117    | 8-729-216-22 | TRANSISTOR 2SA1162-G         |           |           |            |
| 3597 |   | H1    | TRANSISTOR |     | Q118    | 8-729-216-22 | TRANSISTOR 2SA1162-G         |           |           |            |
| 3598 |   | H1    | TRANSISTOR |     | Q119    | 8-729-216-22 | TRANSISTOR 2SA1162-G         |           |           |            |
| 3599 |   | H1    | TRANSISTOR |     | Q120    | 8-729-216-22 | TRANSISTOR 2SA1162-G         |           |           |            |
| 3600 |   | H1    | TRANSISTOR |     | Q121    | 1-801-806-11 | TR DTC144EKA                 |           |           |            |
| 3601 |   | H1    | TRANSISTOR |     | Q122    | 1-801-806-11 | TR DTC144EKA                 |           |           |            |
| 3602 |   | H1    | TRANSISTOR |     | Q123    | 1-801-806-11 | TR DTC144EKA                 |           |           |            |
| 3603 |   | H1    | TRANSISTOR |     | Q124    | 1-801-806-11 | TR DTC144EKA                 |           |           |            |
| 3604 |   | H1    | RESISTOR   |     | R101    | 1-216-817-11 | METAL CHIP 470 5% 1/10W      |           |           |            |
| 3605 |   | H1    | RESISTOR   |     | R102    | 1-216-817-11 | METAL CHIP 470 5% 1/10W      |           |           |            |
| 3606 |   | H1    | RESISTOR   |     | R103    | 1-216-817-11 | METAL CHIP 470 5% 1/10W      |           |           |            |
| 3607 |   | H1    | RESISTOR   |     | R104    | 1-216-817-11 | METAL CHIP 470 5% 1/10W      |           |           |            |
| 3608 |   | H1    | RESISTOR   |     | R105    | 1-216-817-11 | METAL CHIP 470 5% 1/10W      |           |           |            |
| 3609 |   | H1    | RESISTOR   |     | R106    | 1-216-817-11 | METAL CHIP 470 5% 1/10W      |           |           |            |
| 3610 |   | H1    | RESISTOR   |     | R107    | 1-216-817-11 | METAL CHIP 470 5% 1/10W      |           |           |            |
| 3611 |   | H1    | RESISTOR   |     | R108    | 1-216-817-11 | METAL CHIP 470 5% 1/10W      |           |           |            |
| 3612 |   | H1    | RESISTOR   |     | R109    | 1-216-809-11 | METAL CHIP 100 5% 1/10W      |           |           |            |

| No.  | # | Board | Type      | △/* | Ref.No. | Part No.     | Description                  | Remarks-1 | Remarks-2 | Difference |
|------|---|-------|-----------|-----|---------|--------------|------------------------------|-----------|-----------|------------|
| 3613 |   | H1    | RESISTOR  |     | R110    | 1-216-809-11 | METAL CHIP 100 5% 1/10W      |           |           |            |
| 3614 |   | H1    | RESISTOR  |     | R111    | 1-216-809-11 | METAL CHIP 100 5% 1/10W      |           |           |            |
| 3615 |   | H1    | RESISTOR  |     | R124    | 1-216-833-11 | METAL CHIP 10K 5% 1/10W      |           |           |            |
| 3616 |   | H1    | RESISTOR  |     | R125    | 1-216-833-11 | METAL CHIP 10K 5% 1/10W      |           |           |            |
| 3617 |   | H1    | RESISTOR  |     | R126    | 1-216-833-11 | METAL CHIP 10K 5% 1/10W      |           |           |            |
| 3618 |   | H1    | RESISTOR  |     | R127    | 1-216-833-11 | METAL CHIP 10K 5% 1/10W      |           |           |            |
| 3619 |   | H1    | RESISTOR  |     | R128    | 1-216-833-11 | METAL CHIP 10K 5% 1/10W      |           |           |            |
| 3620 |   | H1    | RESISTOR  |     | R129    | 1-216-833-11 | METAL CHIP 10K 5% 1/10W      |           |           |            |
| 3621 |   | H1    | RESISTOR  |     | R130    | 1-216-833-11 | METAL CHIP 10K 5% 1/10W      |           |           |            |
| 3622 |   | H1    | RESISTOR  |     | R131    | 1-216-833-11 | METAL CHIP 10K 5% 1/10W      |           |           |            |
| 3623 |   | H1    | RESISTOR  |     | R132    | 1-216-817-11 | METAL CHIP 470 5% 1/10W      |           |           |            |
| 3624 |   | H1    | RESISTOR  |     | R133    | 1-216-817-11 | METAL CHIP 470 5% 1/10W      |           |           |            |
| 3625 |   | H1    | RESISTOR  |     | R134    | 1-216-817-11 | METAL CHIP 470 5% 1/10W      |           |           |            |
| 3626 |   | H1    | RESISTOR  |     | R135    | 1-216-817-11 | METAL CHIP 470 5% 1/10W      |           |           |            |
| 3627 |   | H1    | RESISTOR  |     | R136    | 1-216-821-11 | METAL CHIP 1K 5% 1/10W       |           |           |            |
| 3628 |   | H1    | RESISTOR  |     | R137    | 1-216-821-11 | METAL CHIP 1K 5% 1/10W       |           |           |            |
| 3629 |   | H1    | RESISTOR  |     | R138    | 1-216-821-11 | METAL CHIP 1K 5% 1/10W       |           |           |            |
| 3630 |   | H1    | RESISTOR  |     | R139    | 1-216-821-11 | METAL CHIP 1K 5% 1/10W       |           |           |            |
| 3631 |   | H3    | CAPACITOR |     | C171    | 1-163-031-91 | CERAMIC CHIP 0.01UF 50V      |           |           |            |
| 3632 |   | H3    | CONNECTOR | *   | CN171   | 1-565-876-11 | PIN, CONNECTOR (PC BOARD) 4P |           |           |            |
| 3633 |   | H3    | DIODE     |     | D171    | 8-719-914-44 | DIODE DAP202K                |           |           |            |
| 3634 |   | H3    | RESISTOR  |     | R171    | 1-216-051-00 | RES-CHIP 1.2K 5% 1/10W       |           |           |            |
| 3635 |   | H3    | RESISTOR  |     | R172    | 1-216-053-00 | RES-CHIP 1.5K 5% 1/10W       |           |           |            |
| 3636 |   | H3    | RESISTOR  |     | R173    | 1-216-059-00 | RES-CHIP 2.7K 5% 1/10W       |           |           |            |
| 3637 |   | H3    | RESISTOR  |     | R174    | 1-216-067-00 | RES-CHIP 5.6K 5% 1/10W       |           |           |            |
| 3638 |   | H3    | RESISTOR  |     | R175    | 1-216-077-91 | RES-CHIP 15K 5% 1/10W        |           |           |            |
| 3639 |   | H3    | SWITCH    |     | S171    | 1-762-196-21 | SWITCH, TACT                 |           |           |            |
| 3640 |   | H3    | SWITCH    |     | S172    | 1-762-196-21 | SWITCH, TACT                 |           |           |            |
| 3641 |   | H3    | SWITCH    |     | S173    | 1-762-196-21 | SWITCH, TACT                 |           |           |            |
| 3642 |   | H3    | SWITCH    |     | S174    | 1-762-196-21 | SWITCH, TACT                 |           |           |            |
| 3643 |   | H3    | SWITCH    |     | S175    | 1-762-196-21 | SWITCH, TACT                 |           |           |            |
| 3644 |   | H3    | SWITCH    |     | S176    | 1-762-196-21 | SWITCH, TACT                 |           |           |            |
| 3645 |   | H4    | CAPACITOR |     | C191    | 1-162-974-11 | CERAMIC CHIP 0.01UF 50V      |           |           |            |
| 3646 |   | H4    | CAPACITOR |     | C192    | 1-162-974-11 | CERAMIC CHIP 0.01UF 50V      |           |           |            |
| 3647 |   | H4    | CONNECTOR |     | CN191   | 1-565-878-11 | PIN, CONNECTOR (PC BOARD) 6P |           |           |            |
| 3648 |   | H4    | RESISTOR  |     | R191    | 1-216-821-11 | METAL CHIP 1K 5% 1/10W       |           |           |            |
| 3649 |   | H4    | SWITCH    |     | S191    | 1-554-118-00 | SWITCH, PUSH (1 KEY)         |           |           |            |

